


Through-beam sensor receiver

OGE-FPKG/US100



1 programming buttons

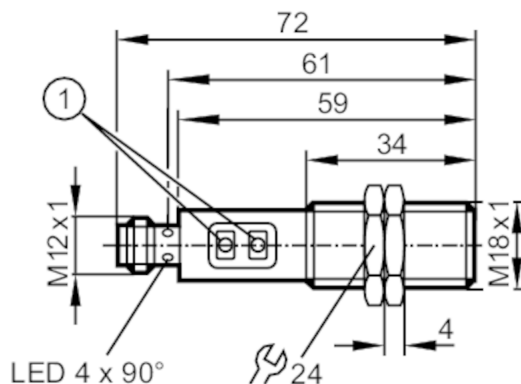

Product characteristics

Type of light	red light
Housing	threaded type

Application

Function principle	Through-beam sensor
--------------------	---------------------

Electrical data

Operating voltage	[V]	10...36 DC
Current consumption	[mA]	11
Protection class		II
Reverse polarity protection		yes
Type of light		red light

Outputs

Electrical design		PNP
Output function		light-on/dark-on mode; (programmable)
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	150; (200 (...60 °C))
Switching frequency DC	[Hz]	1000
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes

Detection zone

Transmitter / receiver		receiver
Range	[m]	< 25
Factory setting		light-on mode
Range adjustable		yes

Operating conditions

Ambient temperature	[°C]	-25...80
---------------------	------	----------



Through-beam sensor receiver

OGE-FPKG/US100

Protection	IP 65; IP 67; IP 68; IP 69K
------------	-----------------------------

Tests / approvals

EMC	EN 60947-5-2	
MTTF	[years]	891

Mechanical data

Weight	[g]	63
Housing		threaded type
Dimensions	[mm]	M18 x 1 / L = 72
Thread designation		M18 x 1
Materials		stainless steel (316L/1.4404); PA; LCP; EPDM; TPU
Lens material		PMMA

Displays / operating elements

Display	switching status	1 x LED, yellow
---------	------------------	-----------------

Accessories


Items supplied	lock nuts: 2
----------------	--------------

Remarks


Remarks	operating voltage "supply class 2" according to cULus
Pack quantity	1 pcs.

Electrical connection

Connector: 1 x M12; coding: A

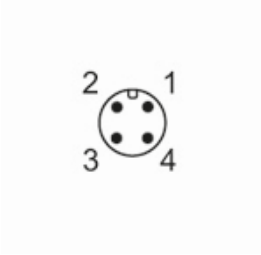

Connection

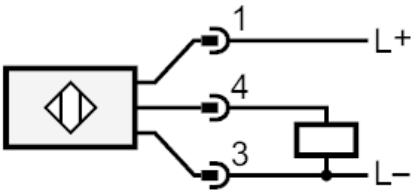



Through-beam sensor receiver

OGE-FPKG/US100

Diagrams and graphs

excess gain graph

