


AL2341



IO-Link input module

IO-Link Module 10x2 DI M12 IP67

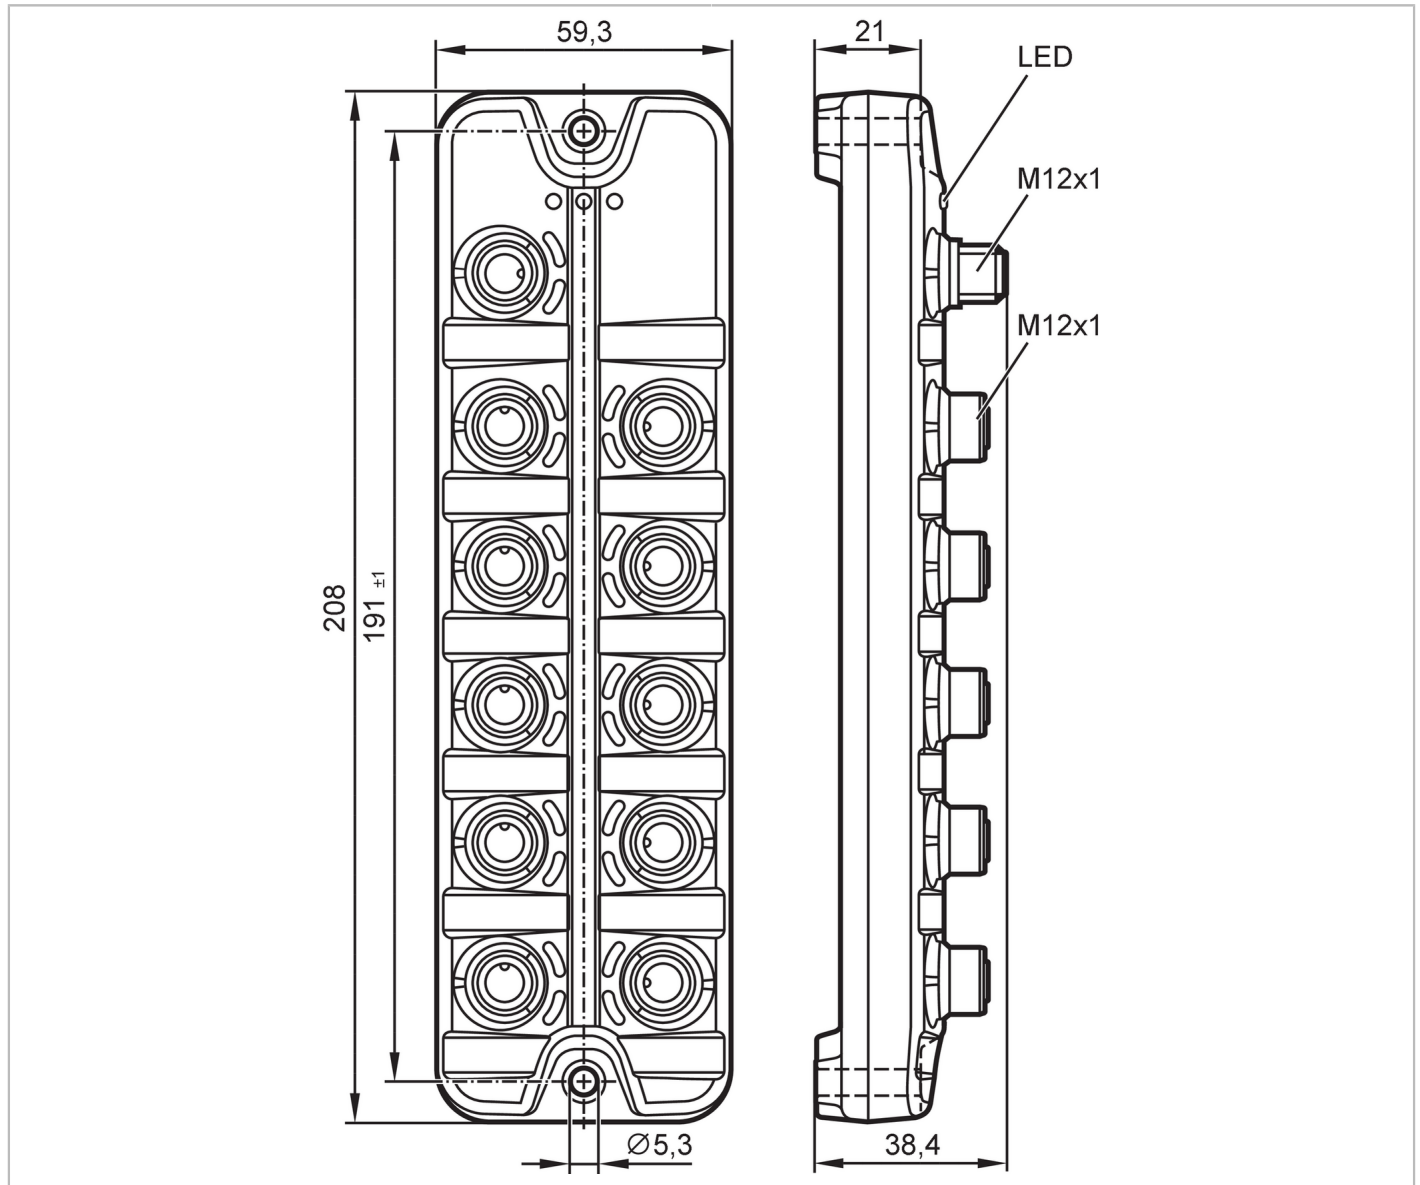

Electrical data		
Operating voltage	[V]	18...30 DC
Current consumption	[mA]	100...1100; (US)
Protection class		III
Sensor supply US		
Current rating per port	[A]	0.1
Inputs / outputs		
Number of inputs and outputs		Number of digital inputs: 20
Inputs		
Number of digital inputs		20; (10 x 2 PNP type 2 according to IEC 61131-2)
Sensor supply of the inputs		IO-Link
Power supply	[V]	16...30



IO-Link input module

IO-Link Module 10x2 DI M12 IP67

Interfaces		
Communication interface	IO-Link	
Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9	
Profiles	Smart Sensor - SSP 0	Generic Profiled Sensor
	Function	Device identification
	Function	Process data variable
	Function	Device diagnosis
SIO mode	no	
Required master port type	A	
Min. process cycle time [ms]	4.3	
Supported DeviceIDs	Type of operation	DeviceID
	default	940
Operating conditions		
Ambient temperature [°C]	-25...60	
Storage temperature [°C]	-25...70	
Max. relative air humidity [%]	90	
Max. height above sea level [m]	2000	
Protection	IP 65; IP 67	
Protection rating (NEMA 250)	6P	
Chemical media	ISO 16750-5	AA, BA, BD, HLP, CC, DB, DC, DD, CA
	NEMA 250 5.13.1	AA
Tests / approvals		
EMC	EN 61000-6-2	
	EN 61000-6-3	
	IEC 61131-9	
Shock resistance	DIN EN 60068-2-27	
Vibration resistance	DIN EN 60068-2-64	
	DIN EN 60068-2-6	
MTTF [years]	140	
Mechanical data		
Weight [g]	392.5	
Housing	rectangular	
Type of mounting	backplane mounting	
Dimensions [mm]	208 x 59.3 x 38.4	
Materials	housing: PA orange; socket: brass nickel-plated	
Displays / operating elements		
Display	operation	1 x LED, green
	fault	1 x LED, red
	function	1 x LED, yellow
Accessories		
Accessories (optional)	protective cap for M12 sockets	
Remarks		
Pack quantity	1 pcs.	

AL2341



IO-Link input module

IO-Link Module 10x2 DI M12 IP67

Electrical connection - IO-Link

Connector: 1 x M12; coding: A; Contacts: 4




X1

1	+ 24 V DC (US)
2	not used
3	GND (US)
4	IO-Link

Electrical connection - Inputs

Connector: 10 x M12; coding: A; Contacts: 4



X1.0...X1.9

1	Sensor supply + 24 V DC (US)
2	digital input DI2
3	Sensor supply GND (US)
4	digital input DI1
5	not used