

# O6T400



## Diffuse reflection sensor

O6T-FPKG/AS/4P



- 1: output function switch  
2: potentiometer sensitivity



### Product characteristics

Type of light	red light
Housing	rectangular

### Application

Function principle	Diffuse reflection sensor
Application	suited for use in the machine tool industry

### Electrical data

Operating voltage [V]	10...30 DC
Current consumption [mA]	16; ((24 V))
Protection class	III
Reverse polarity protection	yes
Type of light	red light
Wave length [nm]	633

### Outputs

Electrical design	PNP
Output function	light-on/dark-on mode; (selectable)
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	100
Switching frequency DC [Hz]	1000
Short-circuit protection	yes
Type of short-circuit protection	pulsed

### Detection zone

Range [mm]	5...500; (white paper 200 x 200 mm 90% remission)
Setting range [mm]	100...500

# O6T400



## Diffuse reflection sensor

O6T-FPKG/AS/4P

Range adjustable	yes
Max. light spot diameter [mm]	15
Light spot dimensions refer to	at maximum range

<b>Operating conditions</b>	
Ambient temperature [°C]	-25...60
Protection	IP 65; IP 67; IP 68

<b>Tests / approvals</b>		
EMC	EN 60947-5-2	
MTTF [years]	910	
UL approval	Ta	-25...40 °C
	Enclosure type	Type 1
	power supply	Class 2
	UL approval no.	E010

<b>Mechanical data</b>	
Weight [g]	34.4
Housing	rectangular
Dimensions [mm]	41.3 x 13 x 21
Materials	housing: stainless steel (316L/1.4404); plastics: PPSU; Sealing: FKM
Lens material	front pane:PMMA
Lens alignment	side lens
Tightening torque [Nm]	1; (screws)

<b>Displays / operating elements</b>		
Display	switching status	1 x LED, yellow
	operation	1 x LED, green


<b>Remarks</b>	
Remarks	operating voltage "supply class 2" according to cULus
Pack quantity	1 pcs.

### Electrical connection

Connector: 1 x M8; coding: A



### Connection

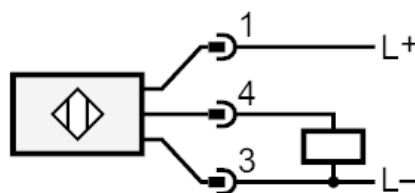

# O6T400




## Diffuse reflection sensor

O6T-FPKG/AS/4P

### Diagrams and graphs

excess gain graph

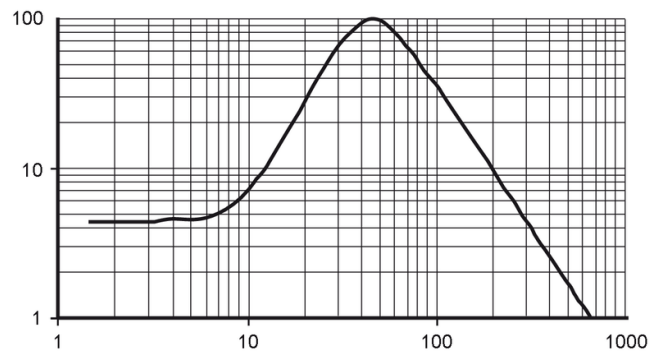

x: distance [mm]

y: excess gain factor