




Retro-reflective sensor

ORR-V/ORT-V

Article no longer available - archive entry

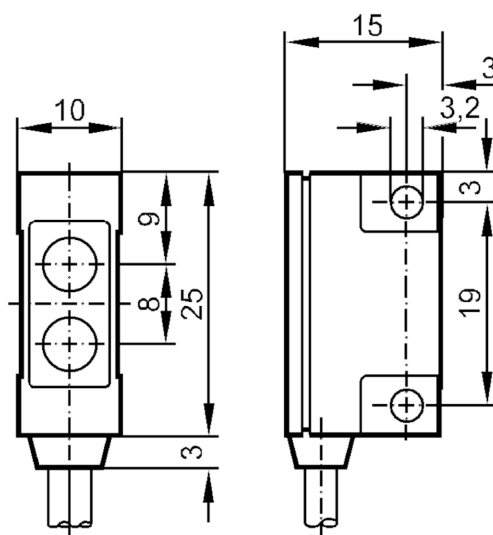

receiver in upper lens
transmitter in lower lens



Product characteristics

Type of light	infrared light
Housing	rectangular

Application

Function principle	Retro-reflective sensor
--------------------	-------------------------

Electrical data

Connection to switching amplifiers	yes
Switching amplifiers	Connection to switching amplifiers OV5012, OV0010
Type of light	infrared light
Wave length [nm]	950

Outputs

Short-circuit protection	no
Overload protection	no

Detection zone

Range referred to prismatic reflector [m]	0.3...1; (Prismatic reflector Ø 80 E20005)
Range [mm]	< 200; (white paper 200 x 200 mm)

Operating conditions

Ambient temperature [°C]	-20...80
Protection	IP 67



Retro-reflective sensor

ORR-V/ORT-V

Tests / approvals

EMC	EN 60947-5-2	
-----	--------------	--

Mechanical data

Weight	[g]	77
Housing		rectangular
Materials		PPO modified
Lens alignment		side lens

Accessories

Items supplied	Angle bracket: 1, E20212
----------------	--------------------------


Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Cable: 2 m; 2 x 0.14 mm²

Connection



- 1 = transmitter
- 2 = receiver
- Core colours :
- RD = red
- WH = white
- screen = screen