


RV-1250-I05/N2



Technical drawing of a mechanical part showing a top view and a side view.

The top view is a circle with a diameter of $\varnothing 48$. It is divided into three sectors by dashed lines. A leader line points to the outer edge of the top sector, and another points to the inner edge of the middle sector. The side view shows a rectangular block with a 30° angle and a 17 mm dimension.

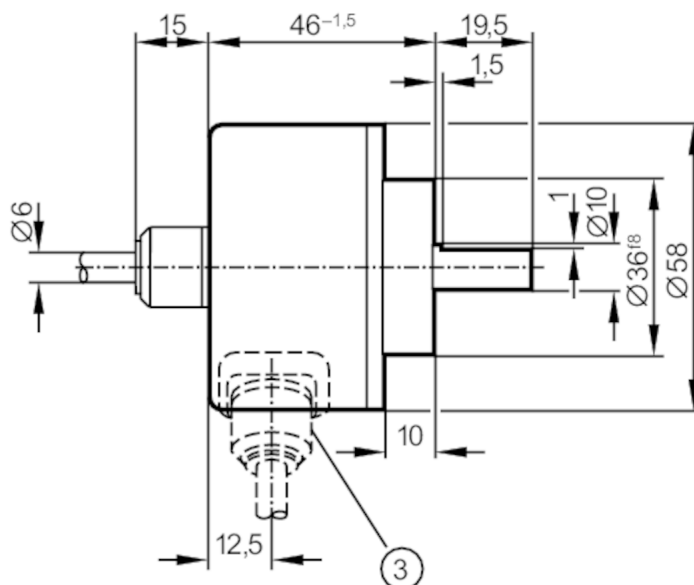

- 1 參考標記的位置
2 M3 深度 5 mm



分辨率	1250 分辨率
軸設計	實心軸
軸直徑 [mm]	10

工作電壓公差	[%]	10
工作電壓	[V]	5 DC
電流損耗	[mA]	150

電氣設計		TTL
每個輸出最大電流負載	[mA]	20
開關頻率	[kHz]	300
相位偏差A和B	[°]	90

分辨率	1250 分辨率
-----	----------

環境溫度	[°C]	-30...100
注意環境溫度		固定鋪設的電纜: -30 °C
存儲溫度	[°C]	-30...100
允許最大的相對空氣濕度	[%]	98
外殼防護等級		IP 64

RV1078



帶實心軸的增量式編碼器

RV-1250-105/N2

認證/測試

抗衝擊	100 g (6 ms)
抗震	10 g (55...2000 Hz)

機械技術數據

尺寸 [mm]	Ø 58 / L = 46
材質	鋁
機械最大值 [U/min]	12000
啟動扭矩最大值 [Nm]	1
溫度扭矩參考 [°C]	20
軸設計	實心軸
軸直徑 [mm]	10
軸材質	鋼 (1.4104)
軸向軸負載最大值 (軸末端) [N]	10
徑向軸負載最大值 (軸末端) [N]	20


電氣連接

電纜: 2 m, PUR; 徑向的

棕色	A
綠色	A 反轉的
灰色	B
粉紅色	B 反轉的
紅色	0 指標
黑色	0 指標 反轉的
藍色	L+ 感測器
白色	0V 感測器
棕色/綠色	L+ (Up)
白色/綠色	0V (Un)
紫色	故障 反轉的
屏蔽	外殼

圖表

脈衝圖



順時針旋轉方向 (看着軸)