


# OS0028

## Through-beam sensor receiver

OSE-FBO/AT



Article no longer available - archive entry

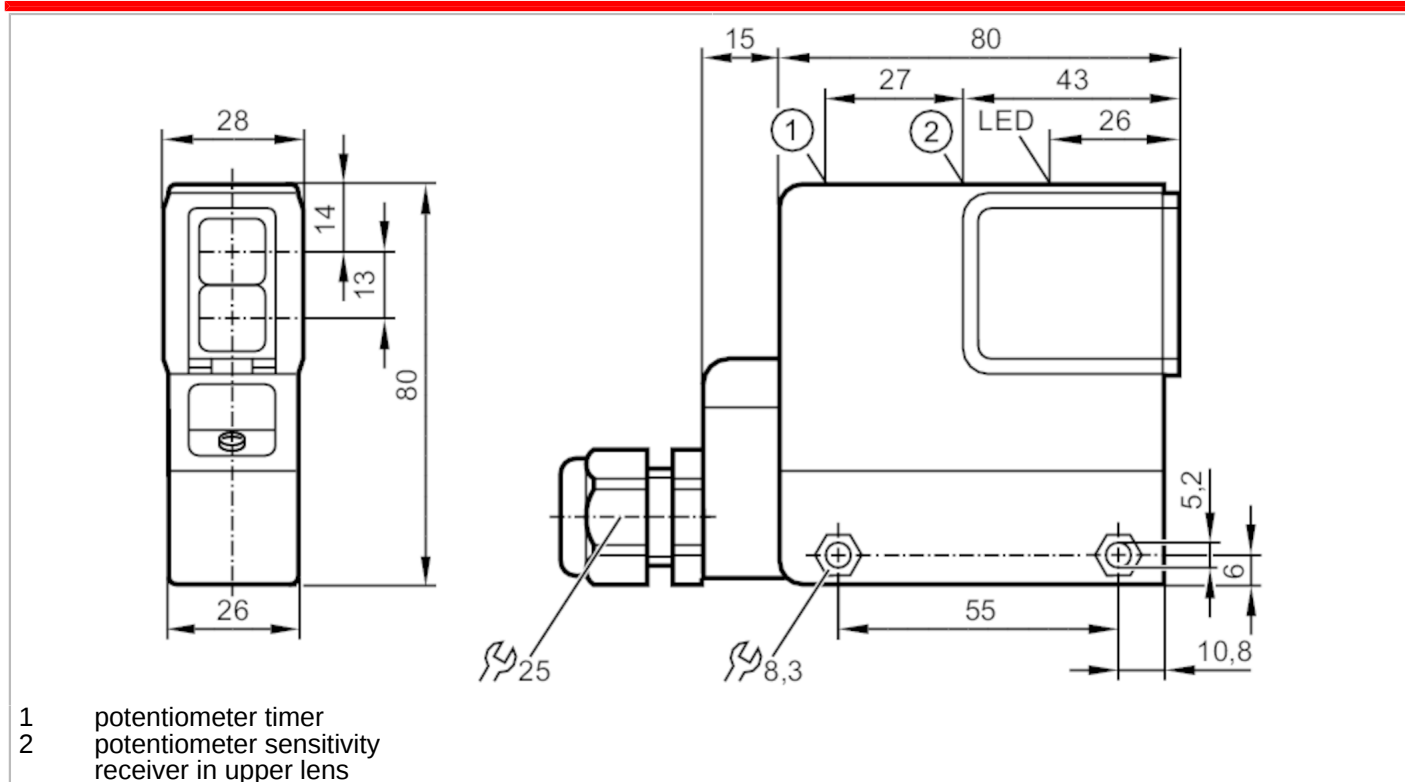

### Product characteristics

Housing	rectangular
Dimensions [mm]	80 x 28 x 95

### Application

Function principle	Through-beam sensor
--------------------	---------------------

### Electrical data

Operating voltage [V]	20...250 AC/DC
Protection class	II



## Through-beam sensor receiver

OSE-FBOAT

Outputs		
Output function		light-on/dark-on mode; (parameterisable)
Max. voltage drop switching output DC	[V]	10.5
Max. voltage drop switching output AC	[V]	10.5
Minimum load current	[mA]	15
Max. leakage current	[mA]	5
Permanent current rating of switching output AC	[mA]	250; (350 (...50 °C))
Permanent current rating of switching output DC	[mA]	250; (350 (...50 °C))
Short-time current rating of switching output	[mA]	2200; (10 ms / 0,5 Hz)
Switching frequency AC	[Hz]	25
Switching frequency DC	[Hz]	40
Short-circuit protection		no
Overload protection		no
Time function	[s]	0.01...5
Detection zone		
Transmitter / receiver		receiver
Range	[m]	< 20
Range adjustable		yes
Operating conditions		
Ambient temperature	[°C]	-25...80
Protection		IP 65
Tests / approvals		
EMC	EN 60947-5-2 EN 55011	class B
Mechanical data		
Housing		rectangular
Dimensions	[mm]	80 x 28 x 95
Materials		PPO modified
Lens material		glass
Displays / operating elements		
Display	switching status	1 x LED, yellow
Accessories		
Accessories (supplied)		Angle bracket screwdrivers
Remarks		
Pack quantity		1 pcs.

# OS0028




## Through-beam sensor receiver

OSE-FBOAT

### Electrical connection

terminals: ...1.5 mm<sup>2</sup>; Cable sheath: Ø 7...13 mm

### Connection

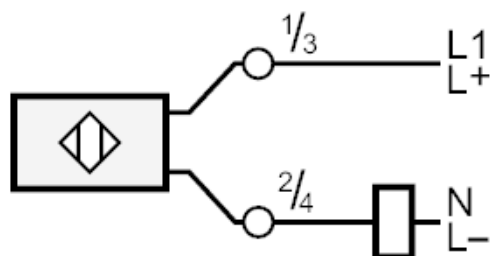

Article no longer available - archive entry