


DN0210



Switching amplifier

N200/SA-1 110-240VAC

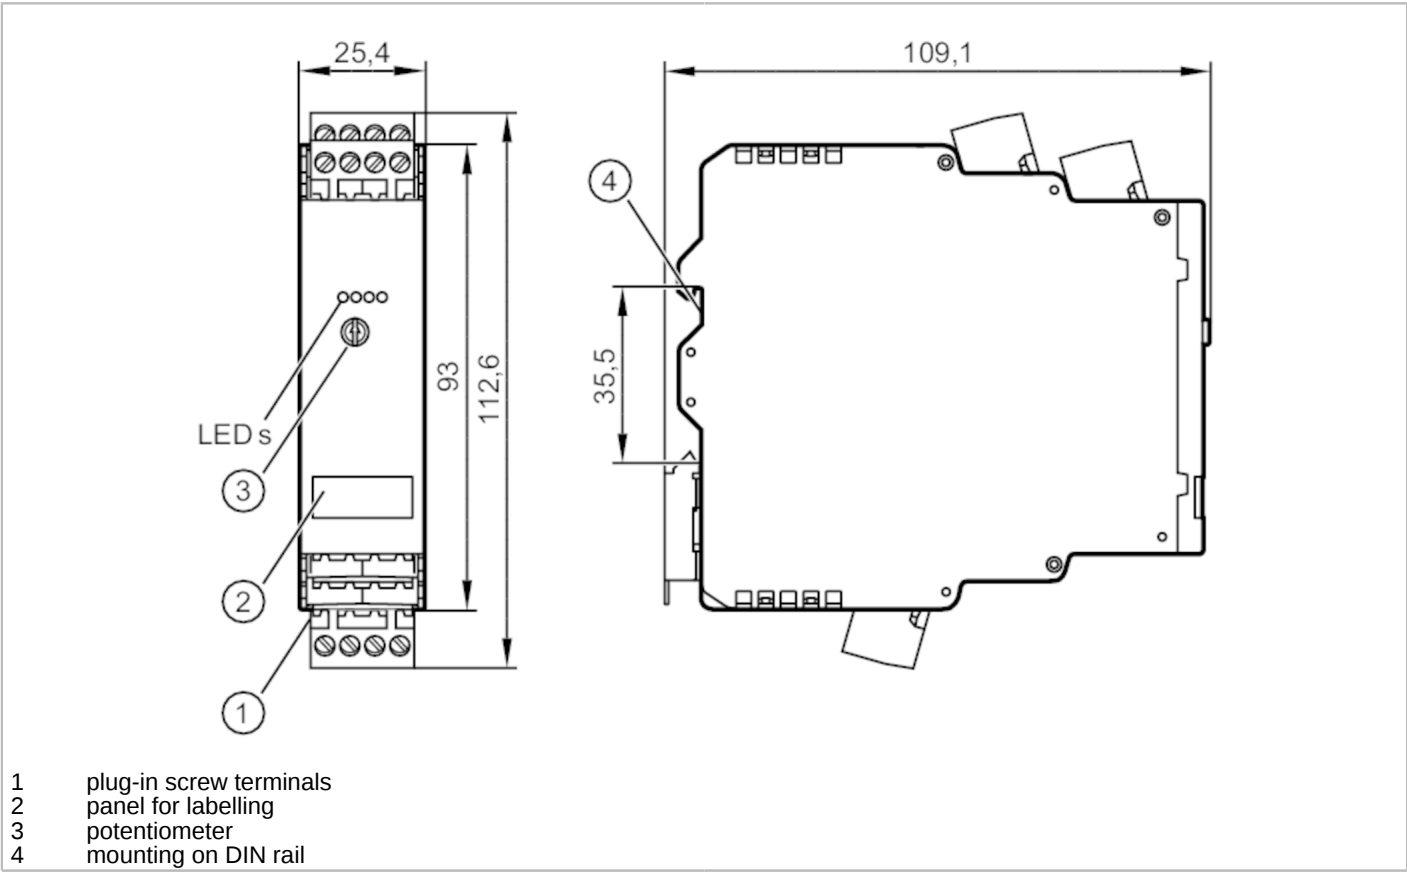

Product characteristics

Housing	housing for DIN rail mounting
---------	-------------------------------

Application

Application	Power supply and signal evaluation
-------------	------------------------------------

Electrical data

Nominal voltage AC	[V]	110...240
Nominal voltage tolerance	[%]	> 20
Nominal voltage tolerance 2	[%]	20...10
Nominal frequency AC	[Hz]	50...60
Insulation rating	[V]	9
Max. power consumption AC	[W]	11
Auxiliary energy for sensors DC	[V]	24; (SELV, $\pm 10\%$, 300 mA)
Number of channels		1

Inputs / outputs

Number of inputs and outputs	Number of relay outputs: 1
------------------------------	----------------------------

Inputs

Input circuit of digital inputs	PNP/NPN
---------------------------------	---------

Outputs

Number of relay outputs	1
-------------------------	---

DN0210



Switching amplifier

N200/SA-1 110-240VAC

Contact rating	4 A (240 V AC, 24 V DC); (ohmic resistance)	
Operating conditions		
Ambient temperature	[°C]	-20...60
Storage temperature	[°C]	-25...70
Max. relative air humidity	[%]	80; (40 °C: 50 % non condensing)
Max. height above sea level	[m]	3000
Protection		IP 20
Protection rating terminals		IP 20
Pollution degree		2; (≤ 240 V AC)
Tests / approvals		
MTTF	[years]	290
Mechanical data		
Weight	[g]	214
Housing		housing for DIN rail mounting
Type of mounting		rail; (TH35 EN 60715)
Materials		plastics: PC-GF20
Displays / operating elements		
Display	power supply	1 x LED, green
	Output	1 x LED, yellow
	errors	1 x LED, red
Accessories		
Items supplied	connector: 3 x 4-pole, with screw connection	

DN0210




Switching amplifier

N200/SA-1 110-240VAC

Electrical connection

pin headers: 4 x ; Spacing: 5.0 mm

Connection

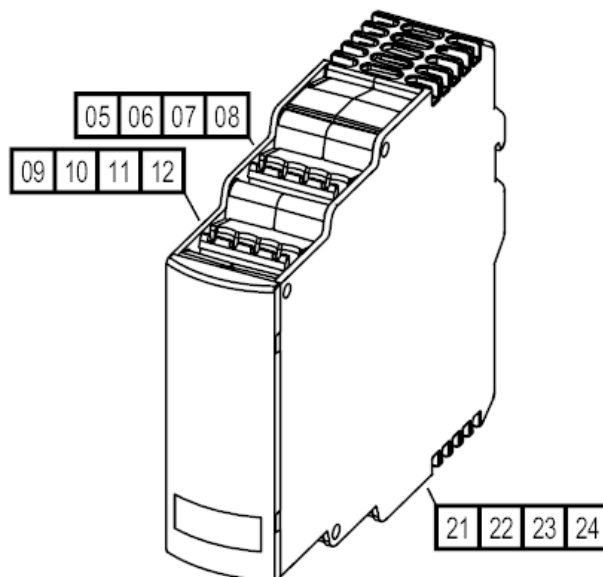

05	relay normally open
06	relay common
07	relay common
08	relay normally closed
09	DC Sensor supply (+)
10	sensor signal pnp/npn
11	not used
12	DC Sensor supply (-)
21	AC supply voltage (L)
22	AC supply voltage (L)
23	AC supply voltage (N)
24	AC supply voltage (N)