




Modul kabinet kontrol AS-Interface

AnalogModule 1A0 ST

Produk tidak tersedia - entri arsip

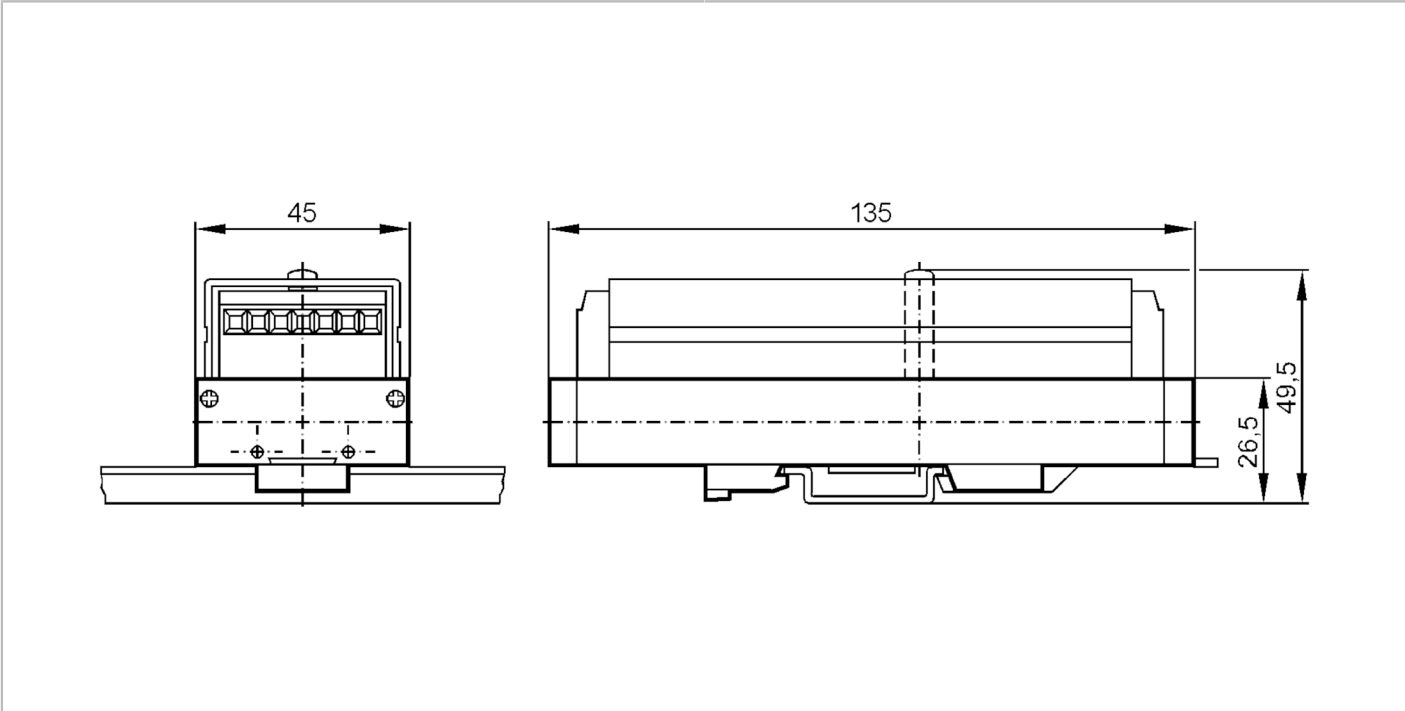

Data kelistrikan

Tegangan pengoperasian	[V]	26.5...31.6 DC
Konsumsi arus	[mA]	< 180

Output

Desain kelistrikan	AS-i
Rentang tegangan DC	[V] 24
Beban arus maks. per output	[mA] 10
Resolusi output analog	6, 9, 12, 15

Kondisi pengoperasian

Suhu sekitar	[°C] 0...70
Perlindungan	IP 20

Pengujian/persetujuan

EME	EN 50295
-----	----------

Klasifikasi AS-i

Profil AS-i	S-7.1
Konfigurasi I/O AS-i	[hex] 7
Kode ID AS-i	[hex] 1

Penetapan bit parameter	bit parameter	fungsi				
	P0	metode pengukuran	:	Tegangan	0...10 V* /	Arus 0/4...20 mA
	P1	Rentang pengukuran	: 0...20 mA* (0...7FFF Hex)	atau	0...10 V (0...7FFF Hex) /	atau 0...10 V (0...2710 Hex)



Modul kabinet kontrol AS-Interface

AnalogModule 1A0 ST

					4...20 mA (0...7FFF Hex)		
P2	fungsi ramp	:		dinonaktifkan*	/	diaktifkan	
P3	transmisi data	:		tunggal	* /	ganda	

Data teknis

Tipe pemasangan	pemasangan pada rel DIN dan panel; pemasangan tali dimungkinkan
Material	PA; PVC

Elemen display/pengoperasian

Display	operasi	2 x LED, hijau
		2 x LED, merah

Aksesori

Aksesori (opsional)	Display LCD:, E70206
---------------------	----------------------


Keterangan

Jumlah paket	1 buah
--------------	--------

Koneksi listrik

terminal sekrup:

Koneksi

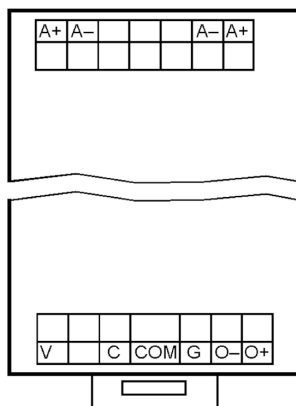

A+	AS-i +
A-	AS-i -
G	ground Ground
O+	suplai aktuator +24V
O-	suplai aktuator 0V
V	output analog Tegangan
C	output analog Arus
COM	output analog 0V