




Modul universal AS-Interface

UniversalModule 2AO(C) IP65

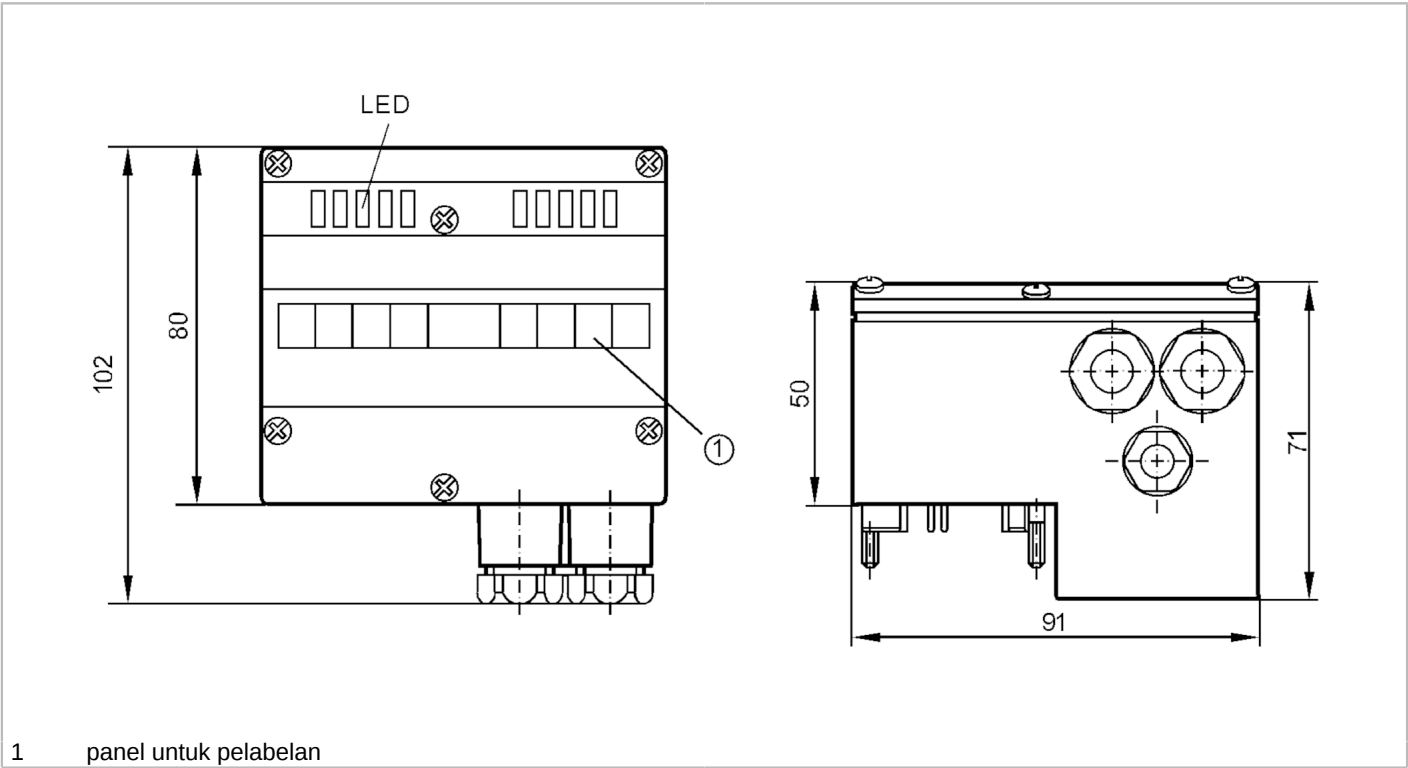

Aplikasi		
Aplikasi	Instalasi di lapangan	
Data kelistrikan		
Tegangan pengoperasian	[V]	26.5...31.6 DC
Konsumsi arus maks. dari AS-i	[mA]	140
Pelindung polaritas terbalik		ya
Suplai tegangan tambahan	[V]	24...30 DC; (AUX)
Suplai tegangan tambahan		opsi
Konsumsi arus maksimal dari suplai tambahan	[mA]	550; (AUX)
Input/output		
Jumlah input dan output	Jumlah output analog: 2	
Input		
Input analog presisi	[%]	0,5
Output		
Jumlah output analog	2; (koneksi aktuator 2 kawat atau 4 kawat)	
Output arus analog	[mA]	0...20
Beban maks.	[Ω]	600
Pelindung beban berlebih		ya
Resolusi output analog		16 (1 bit = 1 μA)
Output suplai aktuator	AS-i / AUX	



Modul universal AS-Interface

UniversalModule 2AO(C) IP65

Kondisi pengoperasian		
Suhu sekitar	[°C]	0...70
Suhu penyimpanan	[°C]	-25...85
Kelembapan udara relatif maks.	[%]	90; (non kondensasi)
Ketinggian maks. di atas permukaan laut	[m]	2000
Perlindungan		IP 65
Pengujian/persetujuan		
EME	EN 50295	
MTTF	[ANN]	145
Klasifikasi AS-i		
AS-i master profile		M3; M4
Profil AS-i		S-7.3.5
Konfigurasi I/O AS-i	[hex]	7
Kode ID AS-i	[hex]	3.5
Data teknis		
Berat	[g]	296.2
Tipe pemasangan		Interface AS-i untuk bagian bawah FC-E
Material		PBT
Elemen display/pengoperasian		
Display	sinyal analog	LED, kuning saluran AO1...AO2
	operasi	LED, hijau AS-i, AUX
	kesalahan	LED, merah
Koneksi listrik		
Koneksi modul		Kabel pipih
Keterangan		
Jumlah paket		1 buah
Koneksi listrik		
klem cage:		




Modul universal AS-Interface

UniversalModule 2AO(C) IP65

pin kontak pada bagian bawah modul, FK / FK-E / PG:

Koneksi

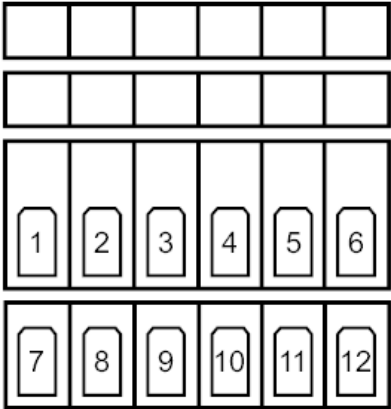

1	O+ suplai aktuator 2 +24V
2	C2 output analog mA
3	O- suplai aktuator 2 0V
4	COM 2 output analog 2 0V
5	Shield
6	Shield
7	O+ suplai aktuator 1 +24V
8	C1 output analog mA
9	O- suplai aktuator 1 0V
10	COM 1 output analog 1 0V
11	FE ground fungsional
12	FE ground fungsional