

Pemutus sirkuit elektronik

Fuse/IO-Link/24VDC/2x4A



- 1 panel untuk pelabelan
- 2 tombol tekan aktif/nonaktif/reset LED status 2
- 3 tombol tekan aktif/nonaktif/reset LED status 1
- 4 terminal colok Output 1/2



Data kelistrikan

Tegangan pengoperasian	[V]	sesuai SELV/PELV ; "kelas suplai 2" menurut UR
Tegangan nominal DC	[V]	24
Tegangan input DC	[V]	19.2...30
Kelas perlindungan		III
Waktu buffering listrik (tegangan nominal 24 V DC)	[ms]	10
Arus sirkuit tertutup	[mA]	8
Jumlah saluran		2
Arus nominal	[A]	4
Arus nominal (Elemen Fail-Safe)	[A]	4

Output

Kapasitansi beban, total	[mF]	15
--------------------------	------	----

Kondisi pengoperasian

Suhu sekitar	[°C]	-25...60
Suhu penyimpanan	[°C]	-40...70
Perlindungan		IP 20; (di bagian depan)
Tingkat kekotoran		2

Pengujian/persetujuan

EME	EN 61000-6-3	radiasi interferensi
	EN 61000-6-2	ketahanan

Data teknis

Berat	[g]	72.5
-------	-----	------

DF2214



Pemutus sirkuit elektronik

Fuse/IO-Link/24VDC/2x4A

Dimensi	[mm]	80 x 12.5 x 98.5
---------	------	------------------

Elemen display/pengoperasian

Display	status	2 x LED, merah/hijau/oranye
Elemen pengoperasian	2 x	tombol tekan

Koneksi listrik

terminal colok:
tuas/strip kontak:

Koneksi

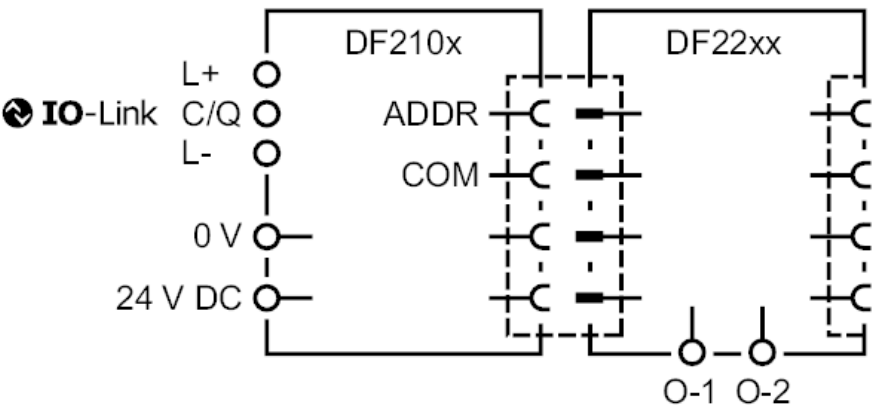


Diagram dan grafik

karakteristik output	24 V DC, 23 °C Switch-off time [s] Multiples of nominal current
	karakteristik waktu-arus