


DN4234



Suplai daya mode switch 24 V DC

PSU-3AC/24VDC-20A/-IIP67

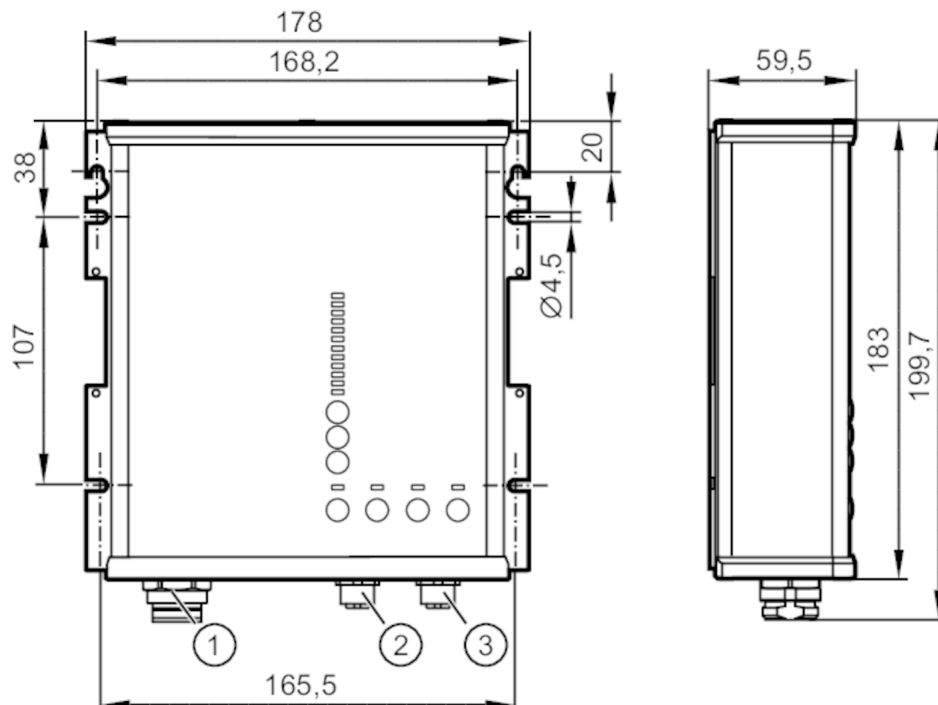

- 1 suplai tegangan
- 2 Tegangan output
- 3 Tegangan output



Data kelistrikan

Tegangan nominal AC	[V]	400 / 480
Frekuensi nominal AC	[Hz]	50...60
Rentang tegangan input AC	[V]	323...552
Tegangan output DC	[V]	24...28
Kelas perlindungan		I
Waktu penundaan pengaktifan maks.	[ms]	12
Toleransi tegangan output	[%]	0.2
Arus output maks. pada tegangan output minimal	[A]	20.8
Arus output maks. pada tegangan output maksimal	[A]	17.8
Daya output (permanen)	[W]	500
Daya output (puncak)	[W]	1000
Faktor daya (tegangan nominal 400 V AC / 50 Hz)		0.94
Faktor daya (tegangan nominal 480 V AC / 50 Hz)		0.95
Jumlah sirkuit output		4
Arus puncak pengaktifan (tegangan nominal 400 V AC / 60 Hz)	[A]	2.1



Suplai daya mode switch 24 V DC

PSU-3AC/24VDC-20A/-IP67

Arus puncak pengaktifan (tegangan nominal 480 V AC / 50 Hz)	[A]	2
Efisiensi (tegangan nominal 400 V AC / 60 Hz)	[%]	94.2
Efisiensi (tegangan nominal 480 V AC / 50 Hz)	[%]	94
Waktu buffering listrik (tegangan nominal 400 V AC / 60 Hz)	[ms]	24
Waktu buffering listrik (tegangan nominal 480 V AC / 50 Hz)	[ms]	24
Arus input (tegangan nominal 400 V AC / 60 Hz)	[A]	1.1
Arus input (tegangan nominal 480 V AC / 50 Hz)	[A]	0.9
Output		
Kapasitansi beban, total	[mF]	12.5
Kondisi pengoperasian		
Suhu sekitar	[°C]	-25...70
Suhu penyimpanan	[°C]	-40...85
Kelembapan udara relatif maks.	[%]	95; (kelembapan relatif)
Ketinggian maks. di atas permukaan laut	[m]	5000
Perlindungan		IP 65; IP 67
Tingkat kekotoran		3



Suplai daya mode switch 24 V DC

PSU-3AC/24VDC-20A/-IIP67

Pengujian/persetujuan		
EME	EN 61000-4-2 CD	8 kV / kriteria kegagalan A
	EN 61000-4-2 AD	15 kV / kriteria kegagalan A
	EN 61000-4-3	80 Mhz...2.7 GHz / 20 V/m kriteria kegagalan A
	EN 61000-4-3	2.7 GHz...6 GHz kV / 10 V/m kriteria kegagalan A
	EN 61000-4-8	50 / 60 Hz / 30 A/m kriteria kegagalan A
	EN 61000-4-4 Burst	4 kV / kriteria kegagalan A
	EN 61000-4-5 Surge	2 kV Lx / Ly / kriteria kegagalan A
	EN 61000-4-5 Surge	4 kV L / PE / kriteria kegagalan A
	EN 61000-4-5 Surge	1 kV + / - / kriteria kegagalan A
	EN 61000-4-5 Surge	1 kV + - / PE / kriteria kegagalan A
	EN 61000-4-5 Surge	1 kV + - / PE / kriteria kegagalan A
	EN 61000-4-5 Surge	1 kV DC-OK / PE / kriteria kegagalan A
	EN 61000-4-6	0.15...80 MHz / 20 V kriteria kegagalan A
	EN 61000-4-11	0 V hingga 1 siklus / kriteria kegagalan A
	EN 61000-4-11	40 % of V / 200 ms kriteria kegagalan A
	EN 61000-4-11	70 % of V / 500 ms kriteria kegagalan A
	EN 61000-4-11	0 V / 5000 ms kriteria kegagalan C
	VDE 0160	1550 V / 1.3 ms kriteria kegagalan A
	EN 55032	Class B
	EN 55032	Class B
	EN 55011	Class B
	EN 61000-3-2	
	EN 61000-3-3	
Ketahanan terhadap guncangan yang kontinu	IEC 60068-2-27	30 g 6 ms / 20 g 11 ms
Ketahanan terhadap getaran	IEC 600068-2-6	2...17.8 Hz ± 1.6mm / 17.8...500 Hz 2 g
Data teknis		
Berat	[g]	1558.8
Dimensi	[mm]	182 x 183 x 59
Material	casing: alloy aluminium; penutup casing: PC; sekrup: baja dilapisi perunggu	
Keterangan		
Jumlah paket	1 buah	

Suplai daya mode switch 24 V DC

PSU-3AC/24VDC-20A/-IIP67

Koneksi listrik - Tegangan output

Konektor: 2 x M12; pengkodean: L; Penguncian: kuningan



1:	US
2:	GND UA
3:	GND US
4:	UA
5:	FE

Koneksi listrik - suplai tegangan


Konektor: 1 x 7/8"; Penguncian: kuningan



1:	L1
2:	N
3:	PE
4:	L2
5:	L3

Diagram dan grafik

diagram blok

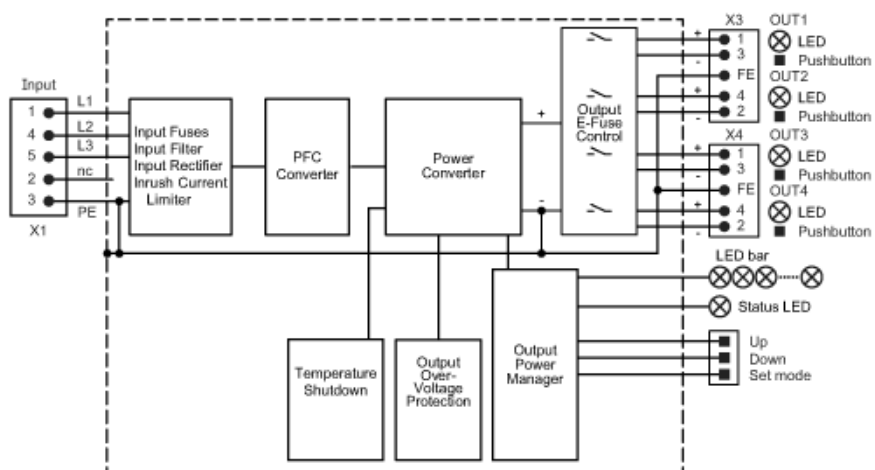


karakteristik output

Output Voltage




kurva karakteristik untuk tingkat efisiensi/kehilangan daya

Efficiency

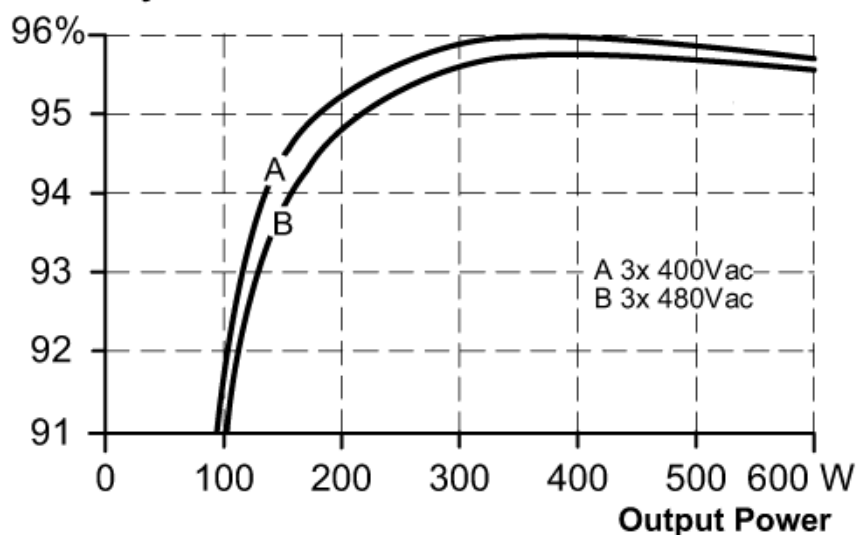

garis karakteristik untuk derating

Allowed Output Power

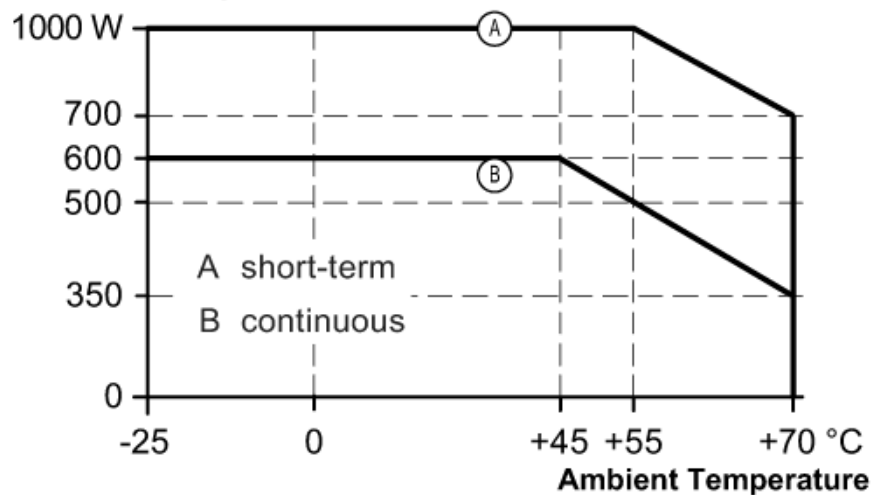

DN4234



Suplai daya mode switch 24 V DC

PSU-3AC/24VDC-20A/-IIP67

garis karakteristik untuk waktu buffering listrik

