


DTE101



Unit evaluasi RFID LF/ HF

DTELF/HFABRWPNUS00

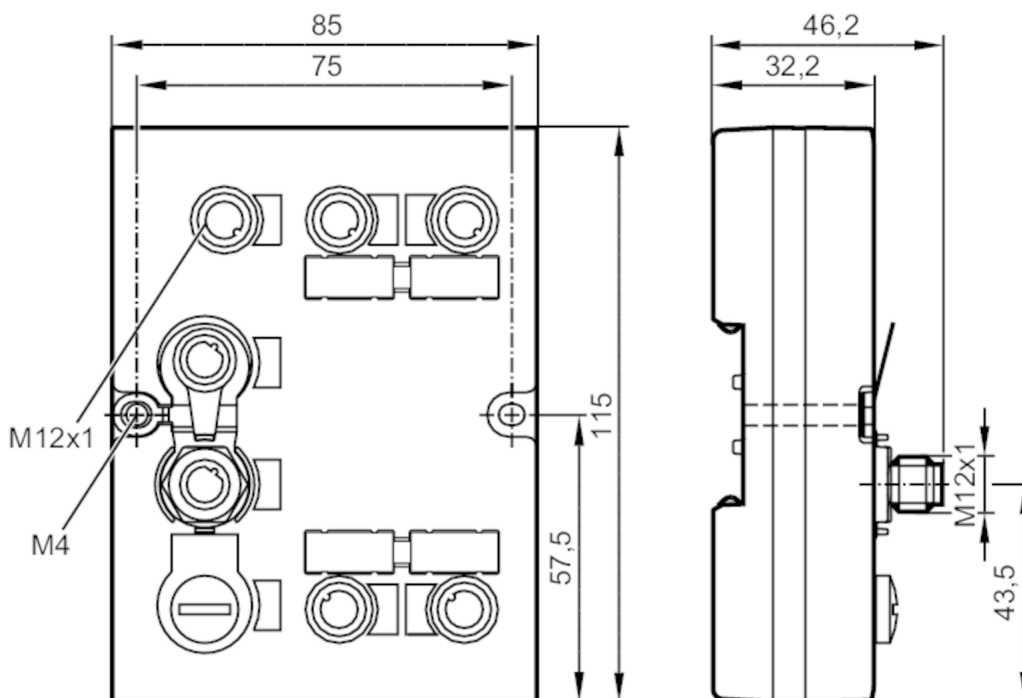

Aplikasi		
Aplikasi		hingga 4 kepala baca/tulis tipe ANT41x/ANT51x
Data kelistrikan		
Tegangan pengoperasian	[V]	18...30 DC
Konsumsi arus	[mA]	< 3000
Input/output		
Jumlah input dan output		Jumlah output digital: 4
Output		
Jumlah output digital		4
Beban arus maks. per output	[mA]	500; (IO 1,2; IO 3,4: 1000 mA)
Interface		
Interface komunikasi		Ethernet
Pengaturan pabrik		Alamat IP: 192.168.0.79
		subnet maks: 255.255.255.0
		alamat IP gateway: 192.168.0.100
Ethernet - PROFINET		
Protokol		PROFINET
Kondisi pengoperasian		
Suhu sekitar	[°C]	-20...60
Suhu penyimpanan	[°C]	-20...85
Perlindungan		IP 67



Unit evaluasi RFID LF/ HF

DTELF/HFABRWPNU00

Pengujian/persetujuan		
Tahan guncangan	IEC 60068-2-27	15 g 11 ms
Ketahanan terhadap getaran	IEC 60028-2-6	±1.6 mm (17...18 Hz) / 2 g (10...150 Hz)
MTTF [ANN]		108.28

Data teknis		
Berat [g]		393.5
Dimensi [mm]		115 x 46.2 x 85
Material		bagian atas: PA Grivory GV5H oranye; bagian atas: TPE; bagian bawah: GD-ALSi12

Elemen display/pengoperasian		
Display	suplai tegangan	1 x LED, hijau
		1 x LED, kuning
	PROFINET-IO	2 x LED, merah/hijau
	Ethernet	1 x LED, hijau
		1 x LED, kuning
	Input/output	1 x LED, hijau
		1 x LED, kuning

Aksesori	
Item dikirim	Tutup pelindung: M12, E73004

Keterangan	
Jumlah paket	1 buah

Koneksi listrik - Ethernet


Konektor: 2 x M12; pengkodean: D



Port 1/2	
1	TD+
2	RD+
3	TD-
4	RD-

Koneksi listrik - Koneksi proses

Konektor: 4 x M12; pengkodean: A





Unit evaluasi RFID LF/ HF

DTELF/HFABRWPNU00

IO 1...4

1	L+
2	IN (I/Q)
3	L-
4	OUT (C/Qo); IN (C/Qi)
5	n.c.

Koneksi listrik - suplai tegangan

Konektor: 1 x M12; pengkodean: A



AUX

1	24 V DC
2	n.c.
3	0 V
4	n.c.
5	n.c.