


DTE103



Unit evaluasi RFID LF/ HF

DTELF/HFABRWECUS00

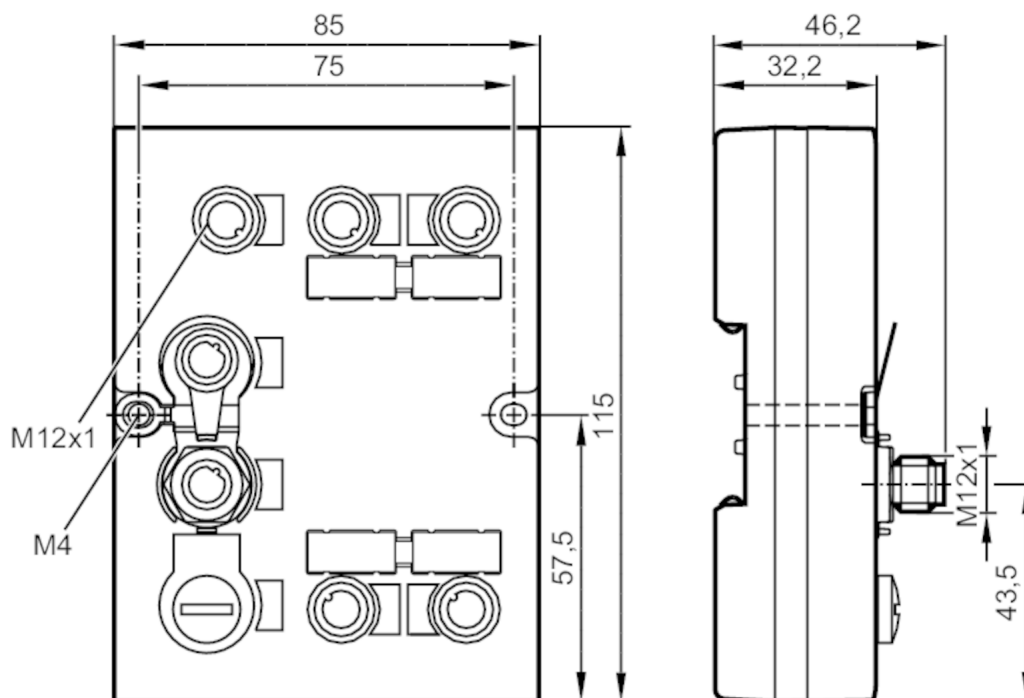


Aplikasi	
Aplikasi	hingga 4 kepala baca/tulis tipe ANT41x/ANT51x
Data kelistrikan	
Tegangan pengoperasian [V]	18...30 DC
Konsumsi arus [mA]	< 3000
Input/output	
Jumlah input dan output	Jumlah output digital: 4
Output	
Jumlah output digital	4
Beban arus maks. per output [mA]	500; (IO 1,2; IO 3,4: 1000 mA)
Interface	
Interface komunikasi	Ethernet
Pengaturan pabrik	Alamat IP: 192.168.0.79
	subnet maks: 255.255.255.0
	alamat IP gateway: 192.168.0.100
Ethernet - EtherCAT	
Protokol	EtherCAT
Kondisi pengoperasian	
Suhu sekitar [°C]	-20...60
Suhu penyimpanan [°C]	-20...85
Perlindungan	IP 67



Unit evaluasi RFID LF/ HF

DTELF/HFABRWECUS00

Pengujian/persetujuan		
Tahan guncangan	IEC 60028-2-27	15 g 11 ms
Ketahanan terhadap getaran	IEC 60028-2-6	±1.6 mm (17...18 Hz) / 2 g (10...150 Hz)
MTTF	[ANN]	108.28
Data teknis		
Berat	[g]	394
Dimensi	[mm]	115 x 46.2 x 85
Material	bagian atas: PA Grivory GV4H oranye; bagian atas: TPE; bagian bawah: GD-ALSi12	
Elemen display/pengoperasian		
Display	suplai tegangan	1 x LED, hijau
		1 x LED, kuning
	EtherCAT RUN/ERR	2 x LED, merah/hijau
	EtherCAT IN/OUT	1 x LED, hijau
		1 x LED, kuning
	Input/output	1 x LED, hijau
		1 x LED, kuning
Aksesori		
Item dikirim	Tutup pelindung: M12, E73004	
Keterangan		
Keterangan	EtherCAT merupakan merek dagang terdaftar dan teknologi yang dipatenkan dan dilisensikan oleh Beckhoff Automation GmbH, Jerman	
Jumlah paket	1 buah	
Koneksi listrik - Ethernet		
Konektor: 2 x M12; pengkodean: D		
		
IN / OUT		
1	TD+	
2	RD+	
3	TD-	
4	RD-	
Koneksi listrik - Koneksi proses		
Konektor: 4 x M12; pengkodean: A		
		



Unit evaluasi RFID LF/ HF

DTELF/HFABRWECUS00

IO 1...4

1	L+
2	IN (I/Q)
3	L-
4	OUT (C/Qo); IN (C/Qi)
5	n.c.

Koneksi listrik - suplai tegangan

Konektor: 1 x M12; pengkodean: A



AUX

1	24 V DC
2	n.c.
3	0 V
4	n.c.
5	n.c.