


DV1530



Tower lampu 5 segmen

LED-Tower-5/Std/Buzzer

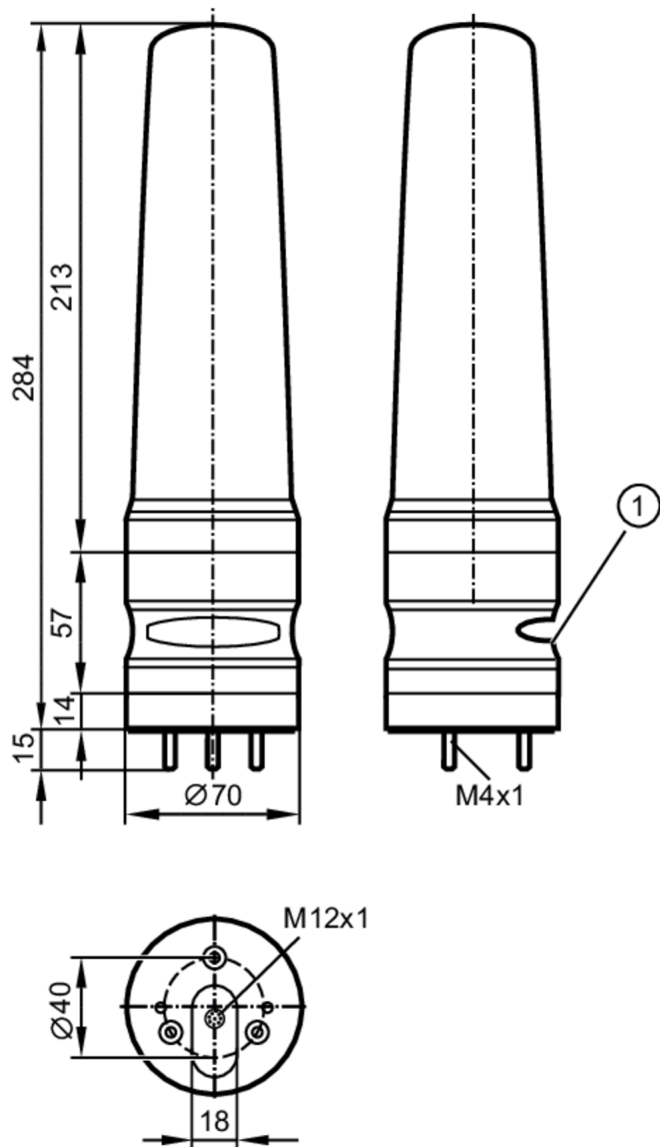

1 buzzer



Aplikasi	
Aplikasi	pensinyalan kondisi mesin
Data kelistrikan	
Tegangan pengoperasian	[V] 18...30 DC; (sesuai SELV/PELV)
Tegangan nominal DC	[V] 24
Konsumsi arus	[mA] < 200
Input/output	
Jumlah input dan output	Jumlah input digital: 6
Input	
Jumlah input digital	6
Arus input Tinggi	[mA] 6



Tower lampu 5 segmen

LED-Tower-5/Std/Buzzer

Interface		
Interface komunikasi	IO-Link	
Tipe transmisi	COM2 (38,4 kBaud)	
Revisi O-Link	1.1	
Standar SDCI	IEC 61131-9	
Mode SIO	ya	
Tipe port master yang diperlukan	A	
Waktu siklus proses min.	[ms]	3.2
DeviceID yang didukung	Tipe operasi	DeviceID
	default	850
Kondisi pengoperasian		
Suhu sekitar	[°C]	-25...50
Suhu penyimpanan	[°C]	-40...75
Kelembapan udara relatif maks.	[%]	90
Tekanan udara	[kPa]	< 106
Ketinggian maks. di atas permukaan laut	[m]	2000
Perlindungan		IP 54
Data teknis		
Berat	[g]	567
Dimensi	[mm]	Ø 70 / L = 284
Material		casing: ABS; lensa: PC
Elemen display/pengoperasian		
Display	status	1 x LED, hijau
	Segmen LED	5 x 4 LED
Sinyal suara		buzzer
Tekanan suara maks.	[dB]	85
Aksesori		
Aksesori (opsional)		dudukan pemasangan, E89060
		braket dinding, E89061
		Adaptor pemasangan, E89063
		braket dengan entri kabel lateral, E89064
		pipa pemasangan, E89065
		pipa pemasangan, E89066
		pipa pemasangan, E89067
Keterangan		
Keterangan	Untuk informasi lebih lanjut, lihat petunjuk pengoperasian.	
Jumlah paket	1 buah	

DV1530




Tower lampu 5 segmen

LED-Tower-5/Std/Buzzer

Koneksi listrik - colokan

Konektor: M12; pengkodean: A




Koneksi

1	input digital Segmen LED 5
2	buzzer
3	input digital Segmen LED 3
4	input digital Segmen LED 2
5	suplai tegangan
6	input digital Segmen LED 1
7	input digital Segmen LED 4
8	IO-Link (C/Q)

Diagram dan grafik

pemasangan di kaki



DV1530

Tower lampu 5 segmen

LED-Tower-5/Std/Buzzer



pemasangan di dinding

