


E80390



Adaptor antenna RFID untuk meningkatkan jangkauan

ANT-AMP/136x76/M18

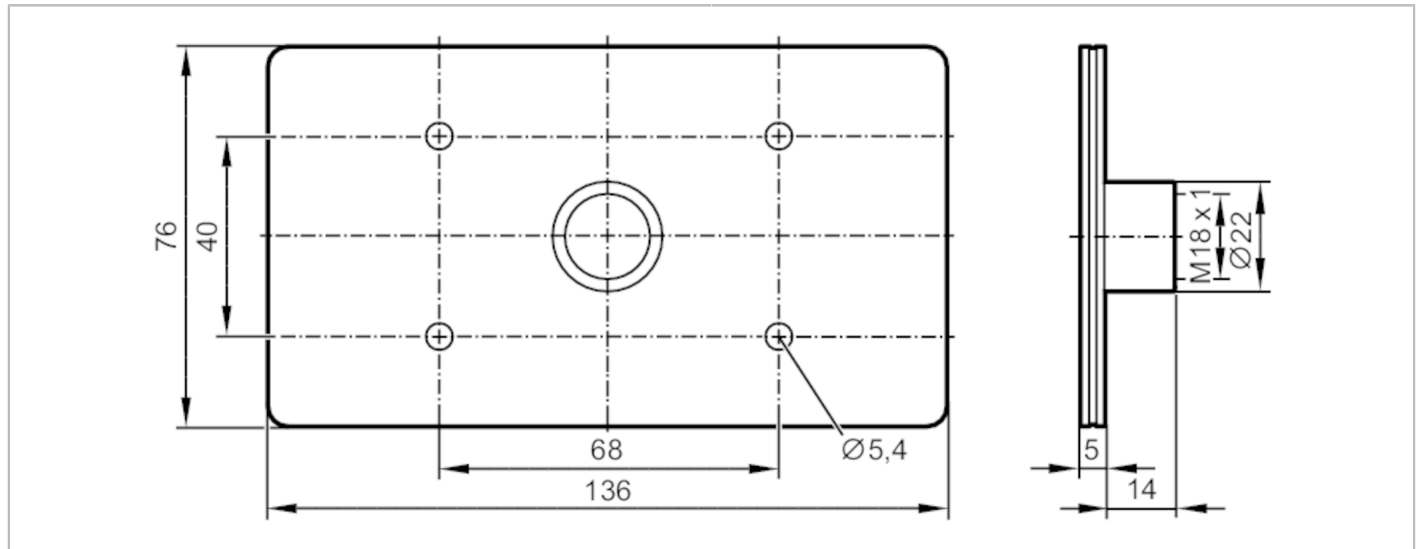

Data kelistrikan

Frekuensi pengoperasian	[MHz]	13,56
-------------------------	-------	-------

Kondisi pengoperasian

Suhu sekitar	[°C]	-20...60
Suhu penyimpanan	[°C]	-20...60

Data teknis

Berat	[g]	95.5
Material		PVC
Torsi pengencangan	[Nm]	0.6

Keterangan

Jumlah paket	1 buah
--------------	--------

Data lain

Tag E80371 (30 mm)

antena	jarak tanpa logam			
ANT420 / DTM424 + E80390	30 mm			
ANT421 / DTM425 + E80390	80 mm			

Tag E80384 (50 mm)

antena	jarak tanpa logam			
ANT420 / DTM424 + E80390	60 mm			
ANT421 / DTM425 + E80390	100 mm			

E80390



Adaptor antenna RFID untuk meningkatkan jangkauan

ANT-AMP/136x76/M18

Tag E80320 (kartu ISO)

antena	jarak tanpa logam			
ANT420 / DTM424 + E80390	75 mm			
ANT421 / DTM425 + E80390	150 mm			