


E80391



Adaptor antenna RFID untuk meningkatkan jangkauan

ANT-AMP/136x76/KQ

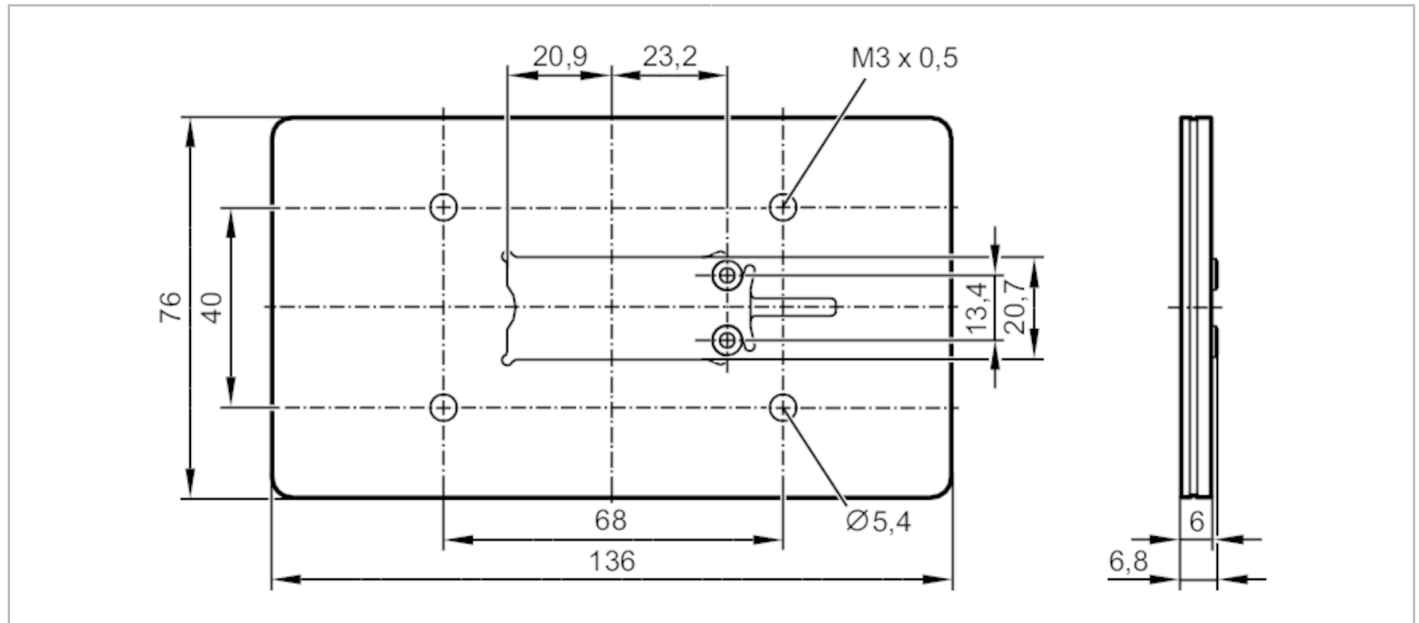

Data kelistrikan

Frekuensi pengoperasian [MHz] 13,56

Kondisi pengoperasian

Suhu sekitar [°C] -20...60

Suhu penyimpanan [°C] -20...60

Data teknis

Berat [g] 110

Material PVC

Torsi pengencangan [Nm] 0.5

Keterangan

Jumlah paket 1 buah

Data lain

Tag E80371 (30 mm)

antena	jarak tanpa logam		
ANT515 / ANT516 + E80391	40 mm		

Tag E80384 (50 mm)

antena	jarak tanpa logam		
ANT515 / ANT516 + E80391	70 mm		

E80391



Adaptor antena RFID untuk meningkatkan jangkauan

ANT-AMP/136x76/KQ

Tag E80320 (kartu ISO)

antena	jarak tanpa logam			
ANT515 / ANT516 + E80391	80 mm			