


## Sensor induktif

IEB3002BBPKG/UP/0,8MPUR/US

Produk tidak tersedia - entri arsip

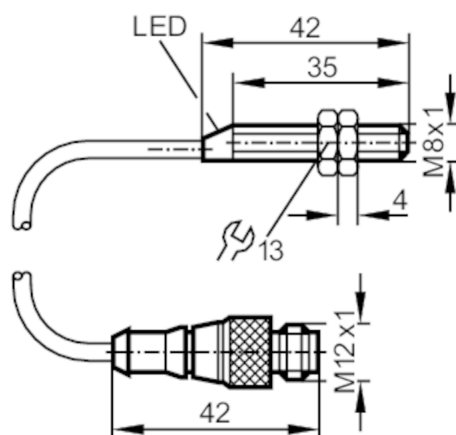

## Karakteristik produk

|                             |                   |
|-----------------------------|-------------------|
| Desain kelistrikan          | PNP/NPN           |
| Fungsi output               | biasanya tertutup |
| Jangkauan pendeteksian [mm] | 2                 |
| Casing                      | tipe berulir      |
| Dimensi [mm]                | M8 x 1 / L = 42   |

## Data kelistrikan

|                              |            |
|------------------------------|------------|
| Tegangan pengoperasian [V]   | 10...55 DC |
| Kelas perlindungan           | II         |
| Pelindung polaritas terbalik | ya         |

## Output

|                                                       |                   |
|-------------------------------------------------------|-------------------|
| Desain kelistrikan                                    | PNP/NPN           |
| Fungsi output                                         | biasanya tertutup |
| Penurunan tegangan maks. pada output peralihan DC [V] | 4.5               |
| Arus beban minimal [mA]                               | 5                 |
| Kebocoran arus maks. [mA]                             | 0.6               |
| Peringkat arus permanen dari output peralihan DC [mA] | 100               |
| Frekuensi peralihan DC [Hz]                           | 1000              |
| Pelindung hubung singkat                              | ya                |
| Tipe pelindung hubung singkat                         | berpulsa          |
| Pelindung beban berlebih                              | ya                |

## Zona pendeteksian

|                                     |               |
|-------------------------------------|---------------|
| Jangkauan pendeteksian [mm]         | 2             |
| Jangkauan pendeteksian real [mm] Sr | $2 \pm 10 \%$ |



## Sensor induktif

IEB3002BBPKG/UP/0,8MPUR/US

|                     |      |          |
|---------------------|------|----------|
| Jarak pengoperasian | [mm] | 0...1.62 |
|---------------------|------|----------|

## Akurasi/deviasi

|                         |                                                                                 |          |
|-------------------------|---------------------------------------------------------------------------------|----------|
| Faktor koreksi          | baja: 1 / baja tahan karat: 0.7 / kuningan: 0.5 / aluminium: 0.4 / tembaga: 0.3 |          |
| Histeresis              | [X01]                                                                           | 3...15   |
| Deviasi titik peralihan | [X01]                                                                           | -10...10 |

## Kondisi pengoperasian

|              |      |          |
|--------------|------|----------|
| Suhu sekitar | [°C] | -25...80 |
| Perlindungan |      | IP 67    |

## Pengujian/persetujuan

|     |              |         |
|-----|--------------|---------|
| EME | EN 60947-5-2 |         |
|     | EN 55011     | kelas B |

## Data teknis

|               |      |                                  |
|---------------|------|----------------------------------|
| Casing        |      | tipe berulir                     |
| Pemasangan    |      | flush mountable                  |
| Dimensi       | [mm] | M8 x 1 / L = 42                  |
| Penamaan ulir |      | M8 x 1                           |
| Material      |      | kuningan dilapisi perunggu putih |

## Elemen display/pengoperasian

|         |                  |                 |
|---------|------------------|-----------------|
| Display | status peralihan | 1 x LED, kuning |
|---------|------------------|-----------------|

## Aksesori

|              |  |                 |
|--------------|--|-----------------|
| Item dikirim |  | mur pengunci: 2 |
|--------------|--|-----------------|

## Keterangan

|              |  |        |
|--------------|--|--------|
| Jumlah paket |  | 1 buah |
|--------------|--|--------|

## Koneksi listrik - colokan

Kabel: 0.8 m, PUR

Konektor: 1 x M12; pengkodean: A





## Sensor induktif

IEB3002BBPKG/UP/0,8MPUR/US

### Koneksi

