


Sensor induktif

IFA2004-ABOW/SL/ 6m

Produk tidak tersedia - entri arsip

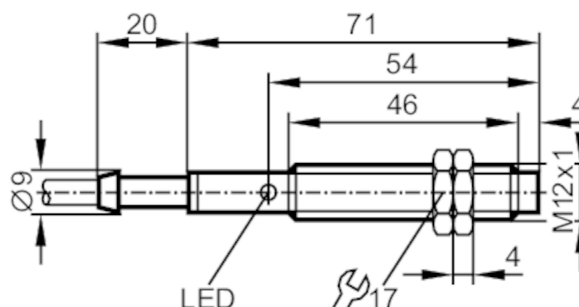

Karakteristik produk

Fungsi output		biasanya terbuka
Jangkauan pendeteksian [mm]		4
Casing		tipe berulir
Dimensi [mm]		M12 x 1 / L = 71

Data kelistrikan

Frekuensi AC [Hz]		47...63
Tegangan pengoperasian [V]		90...250 AC
Kelas perlindungan		II
Pelindung polaritas terbalik		tidak

Output

Fungsi output		biasanya terbuka
Penurunan tegangan maks. pada output peralihan AC [V]		8.5
Arus beban minimal [mA]		8
Kebocoran arus maks. [mA]		3 (250 V AC) / 1.5 (120 V AC)
Peringkat arus permanen dari output peralihan AC [mA]		200; (250 (...50 °C))
Peringkat arus jangka pendek dari output peralihan [mA]		900; (20 ms / 0,5 Hz)
Frekuensi peralihan AC [Hz]		25
Pelindung hubung singkat		tidak
Pelindung beban berlebih		tidak

Zona pendeteksian

Jangkauan pendeteksian [mm]		4
Jangkauan pendeteksian real Sr		4 ± 10 %
Jarak pengoperasian [mm]		0...3.25

Akurasi/deviasi

Faktor koreksi		baja: 1 / baja tahan karat: 0.7 / kuningan: 0.4 / aluminium: 0.3 / tembaga: 0.2
Histeresis [X01]		1...15
Deviasi titik peralihan [X01]		-10...10


IF0167



Sensor induktif

IFA2004-ABOW/SL/ 6m

Kondisi pengoperasian		
Suhu sekitar	[°C]	-25...80
Perlindungan		IP 67
Data teknis		
Casing		tipe berulir
Pemasangan		non-flush mountable
Dimensi	[mm]	M12 x 1 / L = 71
Penamaan ulir		M12 x 1
Material		kuningan berlapis nikel; PBT
Elemen display/pengoperasian		
Display	status peralihan	1 x LED, kuning
Aksesori		
Item dikirim		mur pengunci: 2
Keterangan		
Jumlah paket		1 buah
Koneksi listrik		
Kabel: 6 m, PVC; 3 x 0.5 mm ²		
Koneksi		

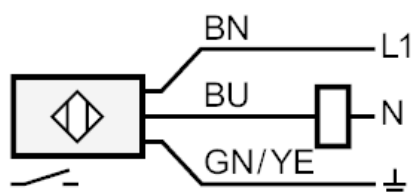

BN = Warna core :
BU = coklat
GN/YE = biru
 hijau/kuning