


Sensor induktif

IFA2004-ABOW/6M

RT

Produk tidak tersedia - entri arsip

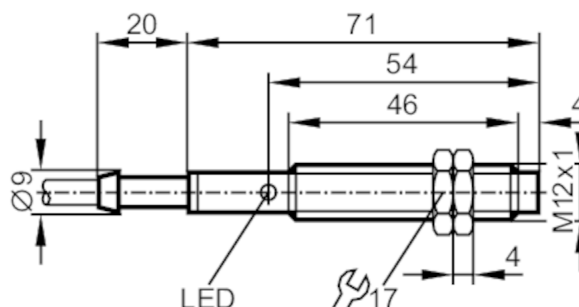

Karakteristik produk

Fungsi output		biasanya terbuka
Jangkauan pendeteksian	[mm]	4
Casing		tipe berulir
Dimensi	[mm]	M12 x 1 / L = 71

Data kelistrikan

Frekuensi AC	[Hz]	47...63
Tegangan pengoperasian	[V]	20...140 AC
Kelas perlindungan		II
Pelindung polaritas terbalik		tidak

Output

Fungsi output		biasanya terbuka
Penurunan tegangan maks. pada output peralihan AC	[V]	8.5
Arus beban minimal	[mA]	8
Kebocoran arus maks.	[mA]	3
Peringkat arus permanen dari output peralihan AC	[mA]	200; (250 (...50 °C))
Peringkat arus jangka pendek dari output peralihan	[mA]	900; (20 ms / 0,5 Hz)
Frekuensi peralihan AC	[Hz]	25
Pelindung hubung singkat		tidak
Pelindung beban berlebih		tidak

Zona pendeteksian

Jangkauan pendeteksian	[mm]	4
Jangkauan pendeteksian real Sr	[mm]	4 ± 10 %
Jarak pengoperasian	[mm]	0...3.25

Akurasi/deviasi

Faktor koreksi		baja: 1 / baja tahan karat: 0.7 / kuningan: 0.4 / aluminium: 0.3 / tembaga: 0.2
Histeresis	[X01]	1...15



Sensor induktif

IFA2004-ABOW/6M

RT

Deviasi titik peralihan	[X01]	-10...10
-------------------------	-------	----------

Kondisi pengoperasian

Suhu sekitar	[°C]	-25...80
--------------	------	----------

Perlindungan	IP 67
--------------	-------

Pengujian/persetujuan

EME	EN 60947-5-2	
	EN 55011	kelas B

Data teknis

Casing	tipe berulir
Pemasangan	non-flush mountable
Dimensi	[mm] M12 x 1 / L = 71
Penamaan ulir	M12 x 1
Material	kuningan berlapis nikel; PBT

Elemen display/pengoperasian

Display	status peralihan	1 x LED, merah
---------	------------------	----------------

Aksesori

Item dikirim	mur pengunci: 2
--------------	-----------------


Keterangan

Jumlah paket	1 buah
--------------	--------

Koneksi listrik

Kabel: 6 m, PVC; 2 x 0.5 mm²

Koneksi

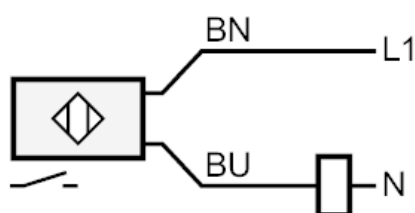

BN =	Warna core :
BU =	coklat
	biru