




Sensor induktif

IFA2002-FRKG/US-100-IRF

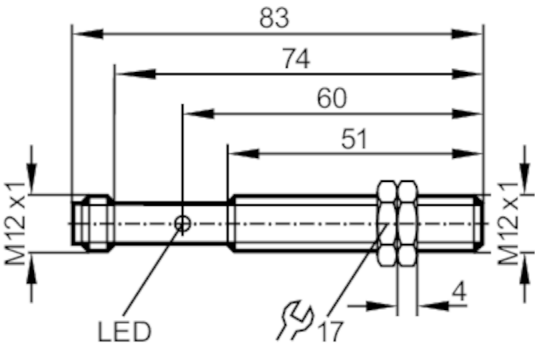

Karakteristik produk

Desain kelistrikan	PNP/NPN
Fungsi output	biasanya terbuka/biasanya tertutup; (dapat dipilih)
Jangkauan pendeteksian [mm]	2
Casing	tipe berulir
Dimensi [mm]	M12 x 1 / L = 83

Data kelistrikan

Tegangan pengoperasian [V]	10...55 DC
Kelas perlindungan	III
Pelindung polaritas terbalik	ya

Output

Desain kelistrikan	PNP/NPN
Fungsi output	biasanya terbuka/biasanya tertutup; (dapat dipilih)
Penurunan tegangan maks. pada output peralihan DC [V]	4.6
Arus beban minimal [mA]	4
Kebocoran arus maks. [mA]	0.5
Peringkat arus permanen dari output peralihan DC [mA]	300
Frekuensi peralihan DC [Hz]	1100
Pelindung hubung singkat	ya
Tipe pelindung hubung singkat	berpulsa
Pelindung beban berlebih	ya

Zona pendeteksian

Jangkauan pendeteksian [mm]	2
Jangkauan pendeteksian real Sr [mm]	2 ± 10 %
Jarak pengoperasian [mm]	0...1.6

Akurasi/deviasi

Histeresis [X01]	1...15
Deviasi titik peralihan [X01]	-10...10



Sensor induktif

IFA2002-FRKG/US-100-IRF

Kondisi pengoperasian		
Suhu sekitar	[°C]	-25...80
Perlindungan		IP 67
Pengujian/persetujuan		
EME	EN 60947-5-2	
	EN 55011	kelas B
MTTF	[ANN]	1815
Persetujuan UL	Ta	0...40 °C
	Tipe penutup	Type 1
	suplai tegangan	Hazardous voltage
	Nomor file UL	E174191
Data teknis		
Berat	[g]	32.7
Casing		tipe berulir
Pemasangan		flush mountable
Dimensi	[mm]	M12 x 1 / L = 83
Penamaan ulir		M12 x 1
Material		kuningan dilapisi perunggu putih; permukaan pendeteksian: PC
Elemen display/pengoperasian		
Display	status peralihan	1 x LED, kuning
Aksesori		
Item dikirim		mur pengunci: 2
Keterangan		
Jumlah paket		1 buah
Koneksi listrik - colokan		

Konektor: 1 x M12; pengkodean: A

