

Sensor induktif

IFA3004-BPKG/V4A/20m

Produk tidak tersedia - entri arsip



Karakteristik produk

Desain kelistrikan	PNP
Fungsi output	biasanya terbuka
Jangkauan pendeteksian [mm]	4
Casing	tipe berulir
Dimensi [mm]	M12 x 1 / L = 71

Data kelistrikan

Tegangan pengoperasian [V]	10...36 DC
Konsumsi arus [mA]	15; (24 V)
Kelas perlindungan	II
Pelindung polaritas terbalik	ya

Output

Desain kelistrikan	PNP
Fungsi output	biasanya terbuka
Penurunan tegangan maks. pada output peralihan DC [V]	2.5
Peringkat arus permanen dari output peralihan DC [mA]	250
Frekuensi peralihan DC [Hz]	400
Pelindung hubung singkat	ya
Tipe pelindung hubung singkat	berpulsa
Pelindung beban berlebih	ya

Zona pendeteksian

Jangkauan pendeteksian [mm]	4
Jangkauan pendeteksian real Sr [mm]	$4 \pm 10\%$
Jarak pengoperasian [mm]	0...3.25

Akurasi/deviasi

Faktor koreksi	baja: 1 / baja tahan karat: 0.7 / kuningan: 0.4 / aluminium: 0.3 / tembaga: 0.2
Histeresis [X01]	1...15

IF5641



Sensor induktif

IFA3004-BPKG/V4A/20m

Deviasi titik peralihan	[X01]	-10...10
-------------------------	-------	----------

Kondisi pengoperasian

Suhu sekitar	[°C]	-25...80
--------------	------	----------

Perlindungan	IP 67
--------------	-------

Pengujian/persetujuan

EME	EN 60947-5-2
-----	--------------

Data teknis

Casing	tipe berulir
--------	--------------

Pemasangan	non-flush mountable
------------	---------------------

Dimensi	[mm]	M12 x 1 / L = 71
---------	------	------------------

Penamaan ulir	M12 x 1
---------------	---------

Material	baja tahan karat (1.4571 / 316Ti); PBT
----------	--

Elemen display/pengoperasian

Display	status peralihan	1 x LED, kuning
---------	------------------	-----------------

Aksesori

Item dikirim	mur pengunci: 2
--------------	-----------------


Keterangan

Jumlah paket	1 buah
--------------	--------

Koneksi listrik

Kabel: 20 m, PVC; 3 x 0.34 mm²

Koneksi

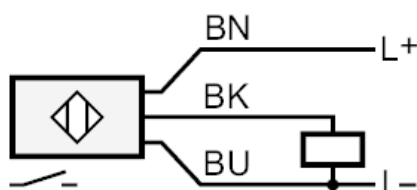

	Warna core :
BK =	hitam
BN =	coklat
BU =	biru