


Sensor induktif

IFB2004-ARKG/UP

RT

Produk tidak tersedia - entri arsip



Karakteristik produk

Desain kelistrikan	PNP/NPN
Fungsi output	biasanya terbuka
Jangkauan pendeteksian [mm]	4
Casing	tipe berulir
Dimensi [mm]	M12 x 1 / L = 40

Data kelistrikan

Tegangan pengoperasian [V]	10...36 DC
Kelas perlindungan	II
Pelindung polaritas terbalik	ya

Output

Desain kelistrikan	PNP/NPN
Fungsi output	biasanya terbuka
Penurunan tegangan maks. pada output peralihan DC [V]	4.6
Arus beban minimal [mA]	4
Kebocoran arus maks. [mA]	0.6
Peringkat arus permanen dari output peralihan DC [mA]	150
Frekuensi peralihan DC [Hz]	1500
Pelindung hubung singkat	ya
Tipe pelindung hubung singkat	berpulsa
Pelindung beban berlebih	ya

Zona pendeteksian

Jangkauan pendeteksian [mm]	4
Jangkauan pendeteksian real Sr	4 ± 10 %
Jarak pengoperasian [mm]	0...3.25

Akurasi/deviasi

Faktor koreksi	baja: 1 / baja tahan karat: 0.7 / kuningan: 0.4 / aluminium: 0.3 / tembaga: 0.2
----------------	---



Sensor induktif

IFB2004-ARKG/UP

RT

Histeresis	[X01]	1...15
Deviasi titik peralihan	[X01]	-10...10

Kondisi pengoperasian

Suhu sekitar	[°C]	-25...80
Perlindungan		IP 67

Pengujian/persetujuan

EME	EN 60947-5-2	
	EN 55011	kelas B

Data teknis

Berat	[g]	86.2
Casing		tipe berulir
Pemasangan		non-flush mountable
Dimensi	[mm]	M12 x 1 / L = 40
Penamaan ulir		M12 x 1
Material		kuningan dilapisi perunggu putih; permukaan pendeteksian: PC

Elemen display/pengoperasian

Display	status peralihan	1 x LED, merah
---------	------------------	----------------

Aksesori

Item dikirim		mur pengunci: 2
--------------	--	-----------------


Keterangan

Jumlah paket		1 buah
--------------	--	--------

Koneksi listrik

Kabel: 2 m, PVC; 2 x 0.34 mm²

Koneksi

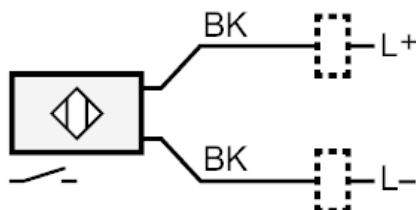

BK = Warna core :
hitam