


Sensor induktif

IF-3004-BPKG/PP-HUE/6M RT

Produk tidak tersedia - entri arsip

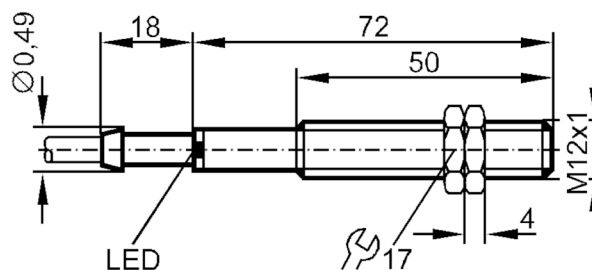

Karakteristik produk

Desain kelistrikan	PNP
Fungsi output	biasanya terbuka
Jangkauan pendeteksian [mm]	4
Casing	tipe berulir
Dimensi [mm]	M12 x 1

Data kelistrikan

Tegangan pengoperasian [V]	10...36 DC
Konsumsi arus [mA]	15; (24 V)
Kelas perlindungan	II
Pelindung polaritas terbalik	ya

Output

Desain kelistrikan	PNP
Fungsi output	biasanya terbuka
Penurunan tegangan maks. pada output peralihan DC [V]	2.5
Peringkat arus permanen dari output peralihan DC [mA]	250
Frekuensi peralihan DC [Hz]	400
Pelindung hubung singkat	ya
Tipe pelindung hubung singkat	berpulsa
Pelindung beban berlebih	ya

Zona pendeteksian

Jangkauan pendeteksian [mm]	4
Jangkauan pendeteksian real Sr [mm]	4 ± 10 %
Jarak pengoperasian [mm]	0...3.25

Akurasi/deviasi

Faktor koreksi	baja: 1 / baja tahan karat: 0.7 / kuningan: 0.5 / aluminium: 0.4 / tembaga: 0.3
Histeresis [X01]	3...15
Deviasi titik peralihan [X01]	-10...10


IF5901



Sensor induktif

IF-3004-BPKG/PP-HUE/6M RT

Kondisi pengoperasian		
Suhu sekitar	[°C]	-25...80
Perlindungan		IP 67
Pengujian/persetujuan		
EME	EN 60947-5-2	
Data teknis		
Casing		tipe berulir
Pemasangan		non-flush mountable
Dimensi	[mm]	M12 x 1
Penamaan ulir		M12 x 1
Material		ETFE
Elemen display/pengoperasian		
Display	status peralihan	1 x LED, merah
Aksesori		
Item dikirim		mur pengunci: 2
Keterangan		
Jumlah paket		1 buah
Koneksi listrik		
Kabel: 6 m, PVC; 3 x 0.34 mm ²		
Koneksi		

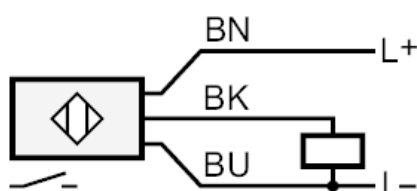

Warna core :
BK = hitam
BN = coklat
BU = biru