


Sensor induktif

IFB3002-BPKG/PH

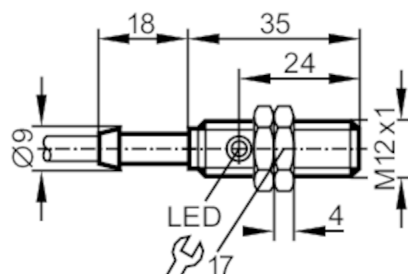

Karakteristik produk

Desain kelistrikan	PNP
Fungsi output	biasanya terbuka
Jangkauan pendeteksian [mm]	2
Casing	tipe berulir
Dimensi [mm]	M12 x 1 / L = 35

Data kelistrikan

Tegangan pengoperasian [V]	10...36 DC
Konsumsi arus [mA]	< 15
Kelas perlindungan	II
Pelindung polaritas terbalik	ya

Output

Desain kelistrikan	PNP
Fungsi output	biasanya terbuka
Penurunan tegangan maks. pada output peralihan DC [V]	2.5
Peringkat arus permanen dari output peralihan DC [mA]	150
Frekuensi peralihan DC [Hz]	1500
Pelindung hubung singkat	ya
Tipe pelindung hubung singkat	berpulsa
Pelindung beban berlebih	ya

Zona pendeteksian

Jangkauan pendeteksian [mm]	2
Jangkauan pendeteksian real Sr [mm]	$2 \pm 10 \%$
Jarak pengoperasian [mm]	0...1.6

Akurasi/deviasi

Faktor koreksi	baja: 1 / baja tahan karat: 0.7 / kuningan: 0.4 / aluminium: 0.3 / tembaga: 0.2
Histeresis [X01]	3...15
Deviasi titik peralihan [X01]	-10...10

Kondisi pengoperasian

Suhu sekitar [°C]	-25...80
-------------------	----------

IF5291



Sensor induktif

IFB3002-BPKG/PH

Perlindungan	IP 67
--------------	-------

Pengujian/persetujuan

EME	EN 60947-5-2	
	EN 55011	kelas B
MTTF	[ANN]	2531

Data teknis

Berat	[g]	83
Casing		tipe berulir
Pemasangan		flush mountable
Dimensi	[mm]	M12 x 1 / L = 35
Penamaan ulir		M12 x 1
Material		kuningan dilapisi perunggu putih; permukaan pendeteksian: PC

Elemen display/pengoperasian

Display	status peralihan	1 x LED, kuning
---------	------------------	-----------------

Aksesori

Item dikirim		mur pengunci: 2
--------------	--	-----------------


Keterangan

Jumlah paket		1 buah
--------------	--	--------

Koneksi listrik

Kabel: 2 m, PUR; sangat fleksibel; 3 x 0.34 mm²

Koneksi

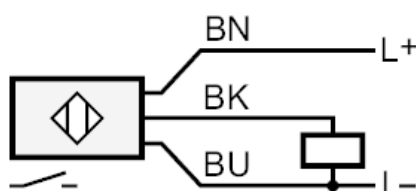

Warna core :
BN = coklat
BU = biru
BK = hitam