


Sensor induktif

IFB2002-ARKG/UP/0,8M/US RT

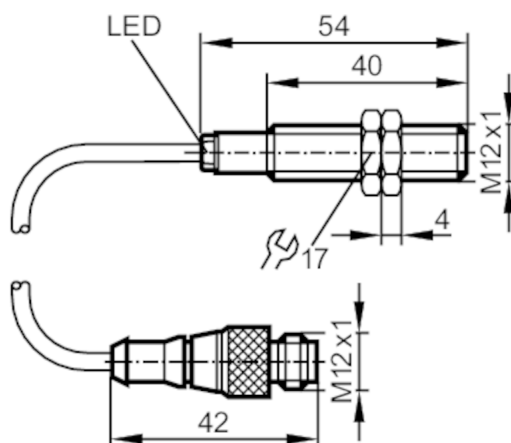

Karakteristik produk

Desain kelistrikan	PNP/NPN
Fungsi output	biasanya terbuka
Jangkauan pendeteksian [mm]	2
Casing	tipe berulir
Dimensi [mm]	M12 x 1 / L = 54

Data kelistrikan

Tegangan pengoperasian [V]	10...55 DC
Kelas perlindungan	II
Pelindung polaritas terbalik	ya

Output

Desain kelistrikan	PNP/NPN
Fungsi output	biasanya terbuka
Penurunan tegangan maks. pada output peralihan DC [V]	4.6
Arus beban minimal [mA]	2
Kebocoran arus maks. [mA]	0.6
Peringkat arus permanen dari output peralihan DC [mA]	100
Frekuensi peralihan DC [Hz]	800
Catatan tentang frekuensi peralihan [Hz]	pada I (beban) ≥ 10 mA
Pelindung hubung singkat	ya
Tipe pelindung hubung singkat	berpulsa
Pelindung beban berlebih	ya

Zona pendeteksian

Jangkauan pendeteksian [mm]	2
Jangkauan pendeteksian real Sr	$2 \pm 10 \%$
Jarak pengoperasian [mm]	0...1.6

IF9920



Sensor induktif

IFB2002-ARKG/UP/0,8M/US RT

Akurasi/deviasi		
Faktor koreksi	baja: 1 / baja tahan karat: 0.7 / kuningan: 0.5 / aluminium: 0.4 / tembaga: 0.3	
Histeresis	[X01]	1...15
Deviasi titik peralihan	[X01]	-10...10
Kondisi pengoperasian		
Suhu sekitar	[°C]	-25...80
Perlindungan		IP 67
Pengujian/persetujuan		
EME	EN 60947-5-2	
MTTF	[ANN]	1912
Data teknis		
Berat	[g]	53
Casing		tipe berulir
Pemasangan		flush mountable
Dimensi	[mm]	M12 x 1 / L = 54
Penamaan ulir		M12 x 1
Material		kuningan berlapis nikel; PBT
Elemen display/pengoperasian		
Display	status peralihan	1 x LED, merah
Aksesori		
Item dikirim		mur pengunci: 2
Keterangan		
Jumlah paket		1 buah

Sensor induktif

IFB2002-ARKG/UP/0,8M/US RT

Koneksi listrik - colokan

Kabel: 0.8 m, PUR

Konektor: 1 x M12; pengkodean: A

