




Sensor induktif

IGB2005-AROA/SEITL/0,6M/AMP

Produk tidak tersedia - entri arsip

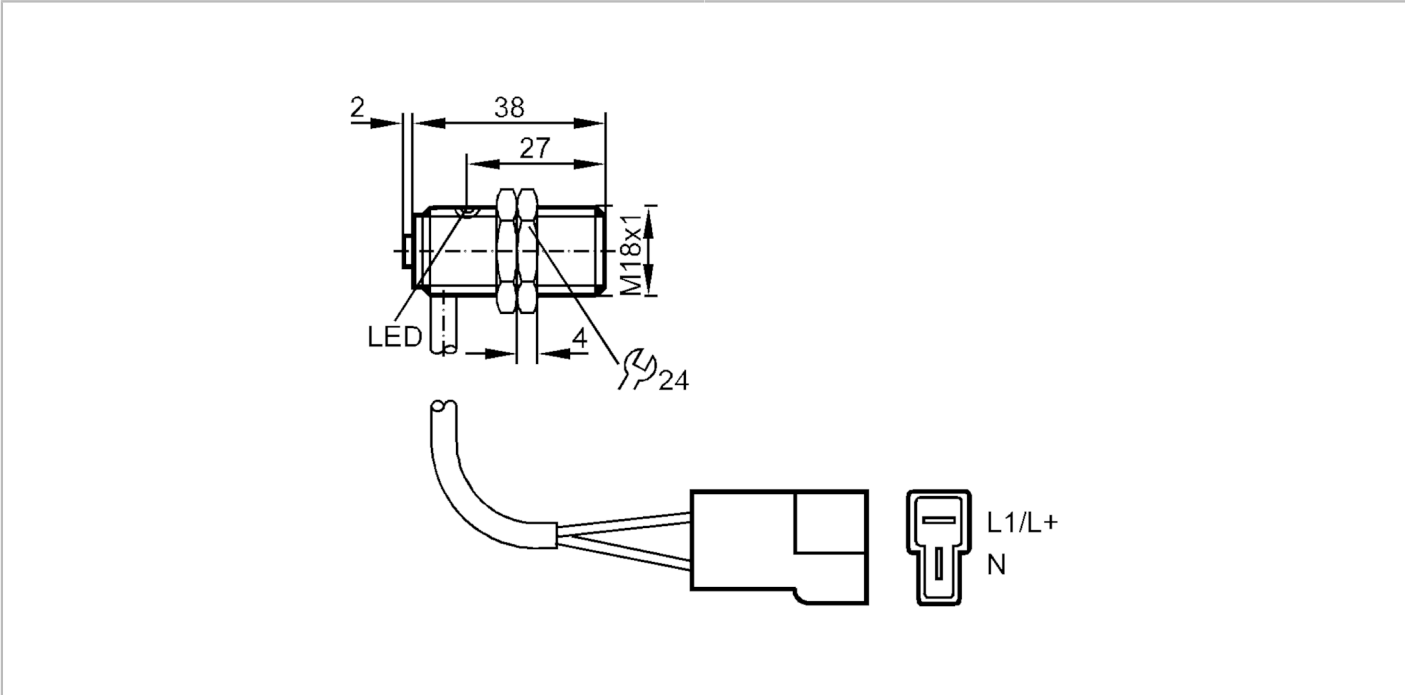

| Karakteristik produk                               |      |                           |
|----------------------------------------------------|------|---------------------------|
| Fungsi output                                      |      | biasanya terbuka          |
| Jangkauan pendeteksian                             | [mm] | 5                         |
| Casing                                             |      | tipe berulir              |
| Dimensi                                            | [mm] | M18 x 1                   |
| Data kelistrikan                                   |      |                           |
| Frekuensi AC                                       | [Hz] | 47...63                   |
| Tegangan pengoperasian                             | [V]  | 20...140 AC / 10...140 DC |
| Pelindung polaritas terbalik                       |      | tidak                     |
| Output                                             |      |                           |
| Fungsi output                                      |      | biasanya terbuka          |
| Penurunan tegangan maks. pada output peralihan DC  | [V]  | 5                         |
| Penurunan tegangan maks. pada output peralihan AC  | [V]  | 5                         |
| Arus beban minimal                                 | [mA] | 5                         |
| Kebocoran arus maks.                               | [mA] | 0.8                       |
| Peringkat arus permanen dari output peralihan AC   | [mA] | 200                       |
| Peringkat arus permanen dari output peralihan DC   | [mA] | 200                       |
| Peringkat arus jangka pendek dari output peralihan | [mA] | 900; (20 ms / 0,5 Hz)     |
| Frekuensi peralihan AC                             | [Hz] | 500                       |
| Frekuensi peralihan DC                             | [Hz] | 500                       |



## Sensor induktif

IGB2005-AROA/SEITL/0,6M/AMP

|                                     |                                                                                 |                             |
|-------------------------------------|---------------------------------------------------------------------------------|-----------------------------|
| Pelindung hubung singkat            |                                                                                 | tidak                       |
| Pelindung beban berlebih            |                                                                                 | tidak                       |
| <b>Zona pendeteksian</b>            |                                                                                 |                             |
| Jangkauan pendeteksian [mm]         |                                                                                 | 5                           |
| Jangkauan pendeteksian real Sr      |                                                                                 | 5 ± 10 %                    |
| Jarak pengoperasian [mm]            |                                                                                 | 0...4.05                    |
| <b>Akurasi/deviasi</b>              |                                                                                 |                             |
| Faktor koreksi                      | baja: 1 / baja tahan karat: 0.7 / kuningan: 0.5 / aluminium: 0.4 / tembaga: 0.3 |                             |
| Histeresis [X01]                    |                                                                                 | 3...15                      |
| Deviasi titik peralihan [X01]       |                                                                                 | -10...10                    |
| <b>Kondisi pengoperasian</b>        |                                                                                 |                             |
| Suhu sekitar [°C]                   |                                                                                 | -25...70                    |
| Perlindungan                        |                                                                                 | IP 65                       |
| <b>Pengujian/persetujuan</b>        |                                                                                 |                             |
| EME                                 | EN 60947-5-2                                                                    |                             |
|                                     | EN 55011                                                                        | kelas B                     |
| <b>Data teknis</b>                  |                                                                                 |                             |
| Casing                              |                                                                                 | tipe berulir                |
| Pemasangan                          |                                                                                 | flush mountable             |
| Dimensi [mm]                        |                                                                                 | M18 x 1                     |
| Penamaan ulir                       |                                                                                 | M18 x 1                     |
| Material                            |                                                                                 | kuningan berlapis nikel; PC |
| <b>Elemen display/pengoperasian</b> |                                                                                 |                             |
| Display                             | status peralihan                                                                | 1 x LED, kuning             |
| <b>Aksesori</b>                     |                                                                                 |                             |
| Item dikirim                        |                                                                                 | mur pengunci: 2             |
| <b>Keterangan</b>                   |                                                                                 |                             |
| Jumlah paket                        |                                                                                 | 1 buah                      |

# IG0364



## Sensor induktif

IGB2005-AROA/SEITL/0,6M/AMP

### Koneksi listrik

Kabel: 0.6 m, PUR; 2 x 0.34 mm<sup>2</sup>

### Koneksi



BN =                      Warna core :  
BU =                      coklat  
                              biru

Konektor: 1 x AMP