


Sensor induktif

IGA3005-BPKG/BS-201-APS

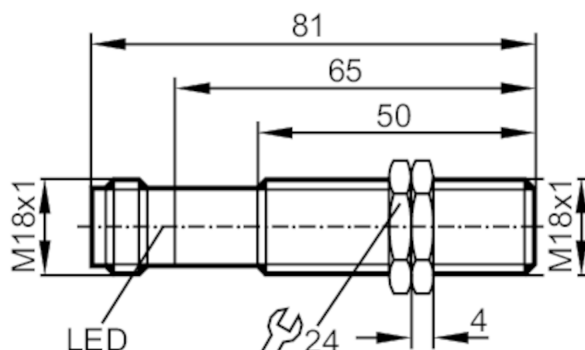

Karakteristik produk

Desain kelistrikan	PNP
Fungsi output	biasanya terbuka
Jangkauan pendeteksian [mm]	5
Casing	tipe berulir
Dimensi [mm]	M18 x 1 / L = 81

Data kelistrikan

Tegangan pengoperasian [V]	10...36 DC
Konsumsi arus [mA]	15; (24 V)
Kelas perlindungan	II
Pelindung polaritas terbalik	ya

Output

Desain kelistrikan	PNP
Fungsi output	biasanya terbuka
Penurunan tegangan maks. pada output peralihan DC [V]	2.5
Peringkat arus permanen dari output peralihan DC [mA]	250
Frekuensi peralihan DC [Hz]	500
Pelindung hubung singkat	ya
Tipe pelindung hubung singkat	berpulsa
Pelindung beban berlebih	ya

Zona pendeteksian

Jangkauan pendeteksian [mm]	5
Jangkauan pendeteksian real Sr	5 ± 10 %
Jarak pengoperasian [mm]	0...4.05

Akurasi/deviasi

Faktor koreksi	baja: 1 / baja tahan karat: 0.7 / kuningan: 0.4 / aluminium: 0.3 / tembaga: 0.2
Histeresis [X01]	1...15



Sensor induktif

IGA3005-BPKG/BS-201-APS

Deviasi titik peralihan	[X01]	-10...10
-------------------------	-------	----------

Kondisi pengoperasian

Suhu sekitar	[°C]	-25...80
Perlindungan		IP 65

Pengujian/persetujuan

EME	EN 60947-5-2	
	EN 55011	kelas B
MTTF	[ANN]	1884

Data teknis

Berat	[g]	60.5
Casing		tipe berulir
Pemasangan		flush mountable
Dimensi	[mm]	M18 x 1 / L = 81
Penamaan ulir		M18 x 1
Material		kuningan dilapisi perunggu putih; PC

Elemen display/pengoperasian

Display	status peralihan	1 x LED, kuning
---------	------------------	-----------------

Aksesori

Item dikirim		mur pengunci: 2
--------------	--	-----------------

Keterangan

Jumlah paket		1 buah
--------------	--	--------

Koneksi listrik - colokan

Konektor: 1 x M18; pengkodean: A



Koneksi

