


## Sensor induktif

IGB2005-ARKG/US

Produk tidak tersedia - entri arsip

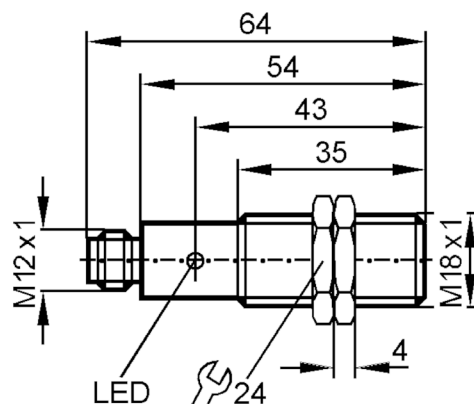

## Karakteristik produk

|                             |                  |
|-----------------------------|------------------|
| Desain kelistrikan          | PNP/NPN          |
| Fungsi output               | biasanya terbuka |
| Jangkauan pendeteksian [mm] | 5                |
| Casing                      | tipe berulir     |
| Dimensi [mm]                | M18 x 1          |

## Data kelistrikan

|                              |            |
|------------------------------|------------|
| Tegangan pengoperasian [V]   | 10...55 DC |
| Kelas perlindungan           | II         |
| Pelindung polaritas terbalik | ya         |

## Output

|                                                       |                  |
|-------------------------------------------------------|------------------|
| Desain kelistrikan                                    | PNP/NPN          |
| Fungsi output                                         | biasanya terbuka |
| Penurunan tegangan maks. pada output peralihan DC [V] | 4.6              |
| Arus beban minimal [mA]                               | 4                |
| Kebocoran arus maks. [mA]                             | 0.6              |
| Peringkat arus permanen dari output peralihan DC [mA] | 400              |
| Frekuensi peralihan DC [Hz]                           | 700              |
| Pelindung hubung singkat                              | ya               |
| Tipe pelindung hubung singkat                         | berpulsa         |



## Sensor induktif

IGB2005-ARKG/US

|                          |    |
|--------------------------|----|
| Pelindung beban berlebih | ya |
|--------------------------|----|

## Zona pendeteksian

|                                |          |
|--------------------------------|----------|
| Jangkauan pendeteksian [mm]    | 5        |
| Jangkauan pendeteksian real Sr | 5 ± 10 % |
| Jarak pengoperasian [mm]       | 0...4.05 |

## Akurasi/deviasi

|                               |                                                                                 |
|-------------------------------|---------------------------------------------------------------------------------|
| Faktor koreksi                | baja: 1 / baja tahan karat: 0.7 / kuningan: 0.5 / aluminium: 0.4 / tembaga: 0.3 |
| Histeresis [X01]              | 3...15                                                                          |
| Deviasi titik peralihan [X01] | -10...10                                                                        |

## Kondisi pengoperasian

|                   |          |
|-------------------|----------|
| Suhu sekitar [°C] | -25...80 |
| Perlindungan      | IP 67    |

## Pengujian/persetujuan

|     |              |
|-----|--------------|
| EME | EN 60947-5-2 |
|-----|--------------|

## Data teknis

|               |                              |
|---------------|------------------------------|
| Casing        | tipe berulir                 |
| Pemasangan    | flush mountable              |
| Dimensi [mm]  | M18 x 1                      |
| Penamaan ulir | M18 x 1                      |
| Material      | kuningan berlapis nikel; PBT |

## Elemen display/pengoperasian

|         |                  |                 |
|---------|------------------|-----------------|
| Display | status peralihan | 1 x LED, kuning |
|---------|------------------|-----------------|

## Aksesori

|              |                 |
|--------------|-----------------|
| Item dikirim | mur pengunci: 2 |
|--------------|-----------------|

## Keterangan

|              |        |
|--------------|--------|
| Jumlah paket | 1 buah |
|--------------|--------|

## Koneksi listrik - soket

Konektor: 1 x M12; pengkodean: A



## Sensor induktif

IGB2005-ARKG/US

### Koneksi

