


Sensor induktif

IGA2008-FRKG/US-100-IRF RT

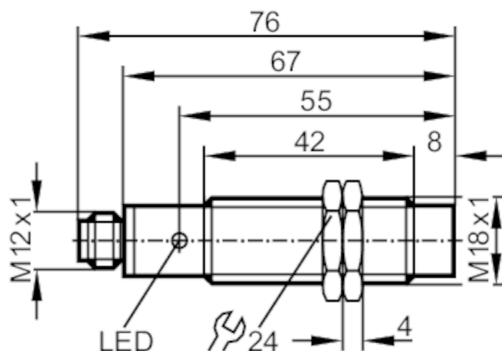

Karakteristik produk

Desain kelistrikan	PNP/NPN
Fungsi output	biasanya terbuka/biasanya tertutup; (dapat dipilih)
Jangkauan pendeteksian [mm]	8
Casing	tipe berulir
Dimensi [mm]	M18 x 1 / L = 76

Data kelistrikan

Tegangan pengoperasian [V]	10...55 DC
Kelas perlindungan	II
Pelindung polaritas terbalik	ya

Output

Desain kelistrikan	PNP/NPN
Fungsi output	biasanya terbuka/biasanya tertutup; (dapat dipilih)
Penurunan tegangan maks. pada output peralihan DC [V]	4.6
Arus beban minimal [mA]	4
Kebocoran arus maks. [mA]	0.8
Peringkat arus permanen dari output peralihan DC [mA]	300
Frekuensi peralihan DC [Hz]	300
Pelindung hubung singkat	ya
Tipe pelindung hubung singkat	berpulsa
Pelindung beban berlebih	ya

Zona pendeteksian

Jangkauan pendeteksian [mm]	8
Jangkauan pendeteksian real Sr [mm]	$8 \pm 10\%$
Jarak pengoperasian [mm]	0...6.5

Akurasi/deviasi

Faktor koreksi	baja: 1 / baja tahan karat: 0.7 / kuningan: 0.4 / aluminium: 0.3 / tembaga: 0.2
Histeresis [X01]	1...15
Deviasi titik peralihan [X01]	-10...10



Sensor induktif

IGA2008-FRKG/US-100-IRF RT

Kondisi pengoperasian		
Suhu sekitar	[°C]	-25...80
Perlindungan		IP 67
Pengujian/persetujuan		
EME	EN 60947-5-2	
	EN 55011	kelas B
MTTF	[ANN]	1806
Persetujuan UL	Ta	0...40 °C
	Tipe penutup	Type 1
	suplai tegangan	Hazardous voltage
	Nomor file UL	E174191
Data teknis		
Berat	[g]	64.7
Casing		tipe berulir
Pemasangan		non-flush mountable
Dimensi	[mm]	M18 x 1 / L = 76
Penamaan ulir		M18 x 1
Material		kuningan dilapisi perunggu putih; PC
Elemen display/pengoperasian		
Display	status peralihan	1 x LED, merah
Aksesori		
Item dikirim		mur pengunci: 2
Keterangan		
Jumlah paket		1 buah
Koneksi listrik - colokan		

Konektor: 1 x M12; pengkodean: A

