

Sensor induktif

IG-4005ZCPKG/6M/SH



Karakteristik produk

Desain kelistrikan	PNP
Fungsi output	komplementer
Jangkauan pendeteksian [mm]	5
Casing	tipe berulir
Dimensi [mm]	M18 x 1 / L = 80

Data kelistrikan

Tegangan pengoperasian [V]	10...36 DC
Konsumsi arus [mA]	10; (24 V)
Kelas perlindungan	II
Pelindung polaritas terbalik	ya

Output

Desain kelistrikan	PNP
Fungsi output	komplementer
Penurunan tegangan maks. pada output peralihan DC [V]	2.5
Kebocoran arus maks. [mA]	0.1
Peringkat arus permanen dari output peralihan DC [mA]	100
Frekuensi peralihan DC [Hz]	720
Pelindung hubung singkat	ya
Tipe pelindung hubung singkat	berpulsa
Pelindung beban berlebih	ya

Zona pendeteksian

Jangkauan pendeteksian [mm]	5
Jangkauan pendeteksian real Sr [mm]	5 ± 10 %
Jarak pengoperasian [mm]	0...4.05

Akurasi/deviasi


Faktor koreksi	baja: 1 / baja tahan karat: 0.7 / kuningan: 0.4 / aluminium: 0.4 / tembaga: 0.3
Histeresis [X01]	3...15
Deviasi titik peralihan [X01]	-10...10



Sensor induktif

IG-4005ZCPKG/6M/SH

Kondisi pengoperasian		
Suhu sekitar	[°C]	-25...100
Perlindungan		IP 67
Pengujian/persetujuan		
EME	EN 60947-5-2	
	EN 55011	kelas B
MTTF	[ANN]	1365
Data teknis		
Berat	[g]	324
Casing		tipe berulir
Pemasangan		flush mountable
Dimensi	[mm]	M18 x 1 / L = 80
Penamaan ulir		M18 x 1
Material		PBT
Elemen display/pengoperasian		
Display	status peralihan	1 x LED, kuning
Aksesori		
Item dikirim		mur pengunci: 2
Keterangan		
Jumlah paket		1 buah
Koneksi listrik		
Kabel: 6 m, silikon; 4 x 0.34 mm ²		
Koneksi		

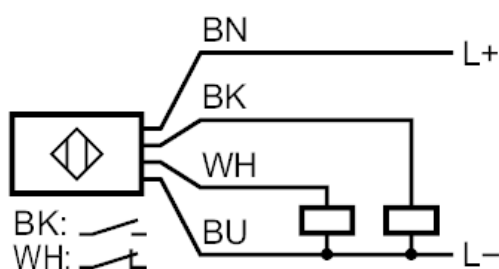

Warna core :

BK = hitam

BN = coklat

BU = biru

WH = putih