


Sensor induktif

IGB2005-ARKG/UP/US-100-IRS RT

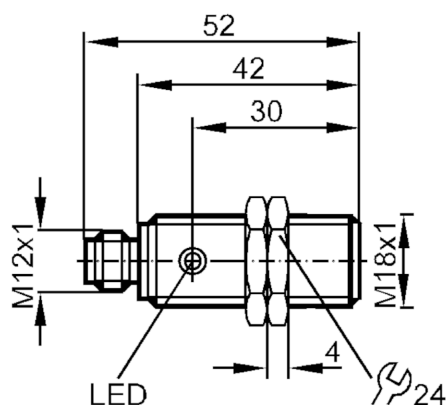

Karakteristik produk

Desain kelistrikan	PNP/NPN
Fungsi output	biasanya terbuka
Jangkauan pendeteksian [mm]	5
Casing	tipe berulir
Dimensi [mm]	M18 x 1

Data kelistrikan

Tegangan pengoperasian [V]	10...36 DC
Konsumsi arus [mA]	15; (24 V)
Kelas perlindungan	II
Pelindung polaritas terbalik	ya

Output

Desain kelistrikan	PNP/NPN
Fungsi output	biasanya terbuka
Penurunan tegangan maks. pada output peralihan DC [V]	4.6
Arus beban minimal [mA]	4
Kebocoran arus maks. [mA]	0.8
Peringkat arus permanen dari output peralihan DC [mA]	150
Frekuensi peralihan DC [Hz]	700
Pelindung hubung singkat	ya
Tipe pelindung hubung singkat	berpulsa
Pelindung beban berlebih	ya



Sensor induktif

IGB2005-ARKG/UP/US-100-IRS RT

Zona pendeteksian		
Jangkauan pendeteksian	[mm]	5
Jangkauan pendeteksian real Sr	[mm]	5 ± 10 %
Jarak pengoperasian	[mm]	0...4.05
Akurasi/deviasi		
Faktor koreksi		baja: 1 / baja tahan karat: 0.7 / kuningan: 0.5 / aluminium: 0.4 / tembaga: 0.3
Histeresis	[X01]	3...15
Deviasi titik peralihan	[X01]	-10...10
Kondisi pengoperasian		
Suhu sekitar	[°C]	-25...80
Perlindungan		IP 67
Pengujian/persetujuan		
EME	EN 60947-5-2	
	EN 55011	kelas B
MTTF	[ANN]	2642
Data teknis		
Berat	[g]	66.5
Casing		tipe berulir
Pemasangan		flush mountable
Dimensi	[mm]	M18 x 1
Penamaan ulir		M18 x 1
Material		kuningan berlapis nikel; PC
Elemen display/pengoperasian		
Display	status peralihan	1 x LED, merah
Aksesori		
Item dikirim		mur pengunci: 2
Keterangan		
Jumlah paket		1 buah
Koneksi listrik - colokan		
Konektor: 1 x M12; pengkodean: A		
		



Sensor induktif

IGB2005-ARKG/UP/US-100-IRS RT

Koneksi

