


IGK2012-FRKG/2LED/US-104



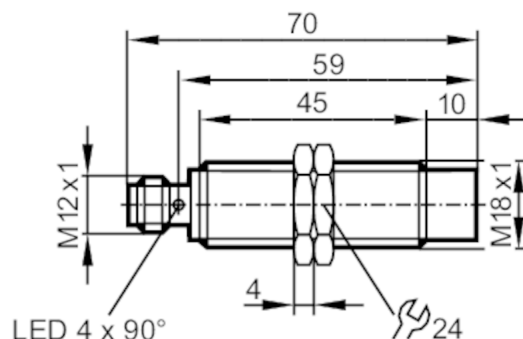

Sensor induktif

IGK2012-FRKG/2LED/US-104

Jangkauan pendeteksian yang lebih baik	ya	
Akurasi/deviasi		
Faktor koreksi	baja: 1 / baja tahan karat: 0.7 / kuningan: 0.5 / aluminium: 0.5 / tembaga: 0.4	
Histeresis [X01]	3...15	
Deviasi titik peralihan [X01]	-10...10	
Kondisi pengoperasian		
Suhu sekitar [°C]	-25...70	
Perlindungan	IP 68; ("Coolant")	
Pengujian/persetujuan		
EME	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF dipancarkan	10 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-5 Surge	0,5 kV antar jalur, Ri: 2 Ohm
	EN 61000-4-6 HF dihantarkan	10 V
	EN 55011	kelas B
MTTF [ANN]	1424	
Persetujuan UL	Ta	-25...70 °C
	Tipe penutup	Type 1
	suplai tegangan	Limited Voltage/Current
	Persetujuan UL no.	A038
	Nomor file UL	E174191
Data teknis		
Berat [g]	53.1	
Casing	tipe berulir	
Pemasangan	non-flush mountable	
Dimensi [mm]	M18 x 1 / L = 70	
Penamaan ulir	M18 x 1	
Material	casing: kuningan dilapisi perunggu putih; permukaan pendeteksian: PBT oranye; Jendela LED: PEI; mur pengunci: kuningan dilapisi perunggu putih	
Torsi pengencangan [Nm]	25	
Elemen display/pengoperasian		
Display	status peralihan	4 x 90° LED, kuning
	alat bantuan pengaturan	1 x LED, merah
Alat bantu pengaturan optik	ya	
Aksesori		
Item dikirim	mur pengunci: 2	
Keterangan		
Jumlah paket	1 buah	

Sensor induktif

IGK2012-FRKG/2LED/US-104

Koneksi listrik - colokan

Konektor: 1 x M12; pengkodean: A; Kontak: dilapisi emas



Koneksi

