


Sensor induktif

IGA2005-ARKG/0,80M/US/PUR

Produk tidak tersedia - entri arsip

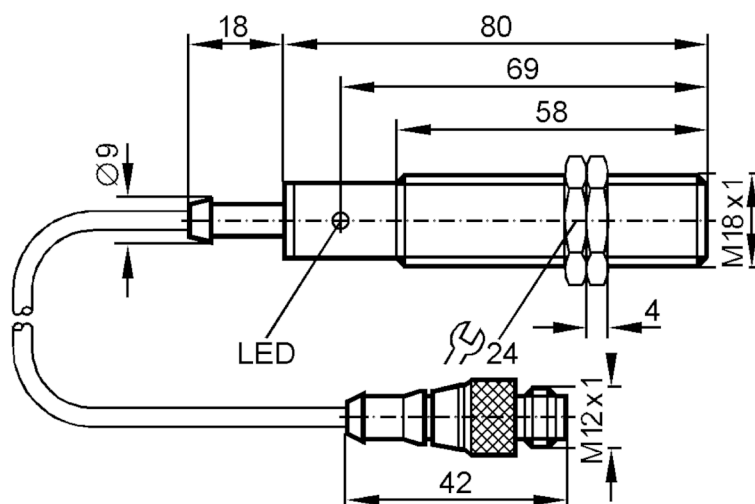

Karakteristik produk

Desain kelistrikan	PNP/NPN
Fungsi output	biasanya terbuka
Jangkauan pendeteksian [mm]	5
Casing	tipe berulir
Dimensi [mm]	M18 x 1

Data kelistrikan

Tegangan pengoperasian [V]	10...55 DC
Kelas perlindungan	II
Pelindung polaritas terbalik	ya

Output


Desain kelistrikan	PNP/NPN
Fungsi output	biasanya terbuka
Penurunan tegangan maks. pada output peralihan DC [V]	4.6
Arus beban minimal [mA]	4
Kebocoran arus maks. [mA]	0.6
Peringkat arus permanen dari output peralihan DC [mA]	400
Frekuensi peralihan DC [Hz]	700
Pelindung hubung singkat	ya
Tipe pelindung hubung singkat	berpulsa



Sensor induktif

IGA2005-ARKG/0,80M/US/PUR

Pelindung beban berlebih	ya	
Zona pendeteksian		
Jangkauan pendeteksian	[mm]	5
Jangkauan pendeteksian real Sr	[mm]	5 ± 10 %
Jarak pengoperasian	[mm]	0...4.05
Akurasi/deviasi		
Faktor koreksi	baja: 1 / baja tahan karat: 0.7 / kuningan: 0.4 / aluminium: 0.3 / tembaga: 0.2	
Histeresis	[X01]	1...15
Deviasi titik peralihan	[X01]	-10...10
Kondisi pengoperasian		
Suhu sekitar	[°C]	-25...80
Perlindungan	IP 67	
Pengujian/persetujuan		
EME	EN 60947-5-2	
Data teknis		
Casing	tipe berulir	
Pemasangan	flush mountable	
Dimensi	[mm]	M18 x 1
Penamaan ulir	M18 x 1	
Material	kuningan berlapis nikel; PBT	
Elemen display/pengoperasian		
Display	status peralihan	1 x LED, kuning
Aksesori		
Item dikirim	mur pengunci: 2	
Keterangan		
Jumlah paket	1 buah	
Koneksi listrik - colokan		
Kabel: 0.8 m, PUR		
Konektor: 1 x M12; pengkodean: A		



Sensor induktif

IGA2005-ARKG/0,80M/US/PUR

Koneksi

