


IN5212



Sensor induktif

IN-3004-BPKG/AS-610-TPS

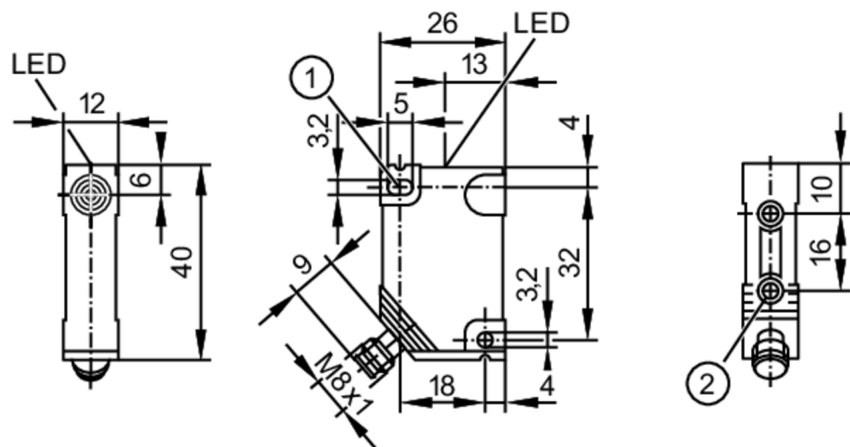

- 1 lubang pemasangan
2 bushing berulir M3 kedalaman 5.8 mm



Karakteristik produk

Desain kelistrikan	PNP
Fungsi output	biasanya terbuka
Jangkauan pendeteksian [mm]	4
Casing	persegi panjang
Dimensi [mm]	40 x 12 x 26

Data kelistrikan

Tegangan pengoperasian [V]	10...36 DC
Konsumsi arus [mA]	15; (24 V)
Kelas perlindungan	III
Pelindung polaritas terbalik	ya

Output

Desain kelistrikan	PNP
Fungsi output	biasanya terbuka
Penurunan tegangan maks. pada output peralihan DC [V]	2.5
Peringkat arus permanen dari output peralihan DC [mA]	250
Frekuensi peralihan DC [Hz]	1300
Pelindung hubung singkat	ya
Tipe pelindung hubung singkat	berpulsa
Pelindung beban berlebih	ya

Zona pendeteksian

Jangkauan pendeteksian [mm]	4
Jangkauan pendeteksian real Sr	4 ± 10 %
Jarak pengoperasian [mm]	0...3.25



Sensor induktif

IN-3004-BPKG/AS-610-TPS

Akurasi/deviasi		
Faktor koreksi	baja: 1 / baja tahan karat: 0.7 / kuningan: 0.4 / aluminium: 0.3 / tembaga: 0.2	
Histeresis [X01]		1...15
Deviasi titik peralihan [X01]		-10...10
Kondisi pengoperasian		
Suhu sekitar [°C]		-25...80
Perlindungan		IP 65
Pengujian/persetujuan		
EME	EN 60947-5-2	
	EN 55011	kelas B
MTTF [ANN]		1925
Persetujuan UL	Ta	0...40 °C
	Tipe penutup	Type 1
	suplai tegangan	Hazardous voltage
	Nomor file UL	E174191
Data teknis		
Berat [g]		20.5
Casing		persegi panjang
Pemasangan		non-flush mountable
Dimensi [mm]		40 x 12 x 26
Material		PBT
Lubang pemasangan		
Torsi pengencangan [Nm]		< 0.5
Bushing berulir		
Torsi pengencangan [Nm]		< 1.2; (ketika insert kuningan bersentuhan dengan pasangan komponen)
Elemen display/pengoperasian		
Display	status peralihan	1 x LED, kuning
Keterangan		
Jumlah paket		1 buah
Koneksi listrik - colokan		
Konektor: 1 x M8; pengkodean: A		
		



Sensor induktif

IN-3004-BPKG/AS-610-TPS

Koneksi

