


Sensor induktif

IOW2010-ARKG/0,8M/US/UP RT



1 pemasangan snap-fit

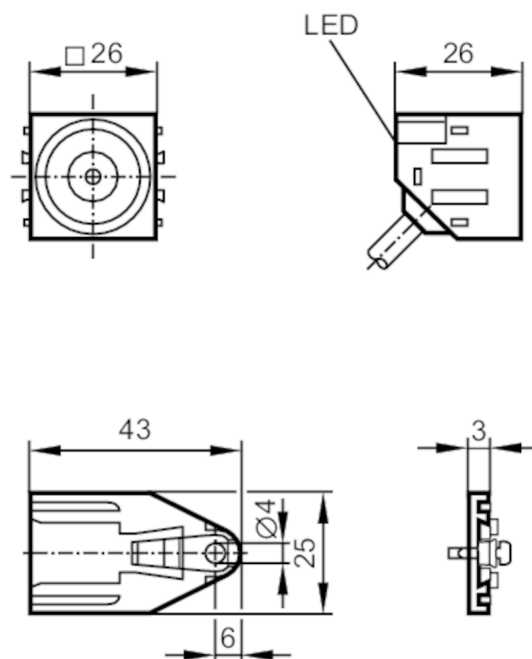

Karakteristik produk

Desain kelistrikan	PNP/NPN
Fungsi output	biasanya terbuka
Jangkauan pendeteksian [mm]	10
Casing	persegi panjang
Dimensi [mm]	26 x 26 x 26

Data kelistrikan

Tegangan pengoperasian [V]	10...36 DC
Kelas perlindungan	II
Pelindung polaritas terbalik	ya

Output

Desain kelistrikan	PNP/NPN
Fungsi output	biasanya terbuka
Penurunan tegangan maks. pada output peralihan DC [V]	4.6
Arus beban minimal [mA]	2
Kebocoran arus maks. [mA]	0.6
Peringkat arus permanen dari output peralihan DC [mA]	100
Frekuensi peralihan DC [Hz]	250
Pelindung hubung singkat	ya
Tipe pelindung hubung singkat	berpulsa



Sensor induktif

IOW2010-ARKG/0,8M/US/UP RT

Pelindung beban berlebih	ya	
Zona pendeteksian		
Jangkauan pendeteksian	[mm]	10
Jangkauan pendeteksian real Sr	[mm]	10 ± 10 %
Jarak pengoperasian	[mm]	0...8.1
Akurasi/deviasi		
Faktor koreksi	baja: 1 / baja tahan karat: 0.7 / kuningan: 0.5 / aluminium: 0.4 / tembaga: 0.3	
Histeresis	[X01]	1...15
Deviasi titik peralihan	[X01]	-10...10
Kondisi pengoperasian		
Suhu sekitar	[°C]	-25...70
Perlindungan		IP 67
Pengujian/persetujuan		
EME	EN 60947-5-2	
	EN 55011	kelas B
MTTF	[ANN]	2577
Data teknis		
Berat	[g]	72.5
Casing		persegi panjang
Pemasangan		flush mountable
Dimensi	[mm]	26 x 26 x 26
Material		PA
Elemen display/pengoperasian		
Display	status peralihan	1 x LED, merah
Aksesori		
Item dikirim	sekrup dengan kepala: 1 x M4 x 12	
Keterangan		
Jumlah paket	1 buah	
Koneksi listrik - colokan		
Kabel: 0.8 m, PUR; 3 x 0.14 mm²		
Konektor: 1 x M12; pengkodean: A		

**Sensor induktif**

IOW2010-ARKG/0,8M/US/UP RT

Koneksi