


Sensor induktif

IOC2010-BRKG/0,80M/US/FRONT

Produk tidak tersedia - entri arsip

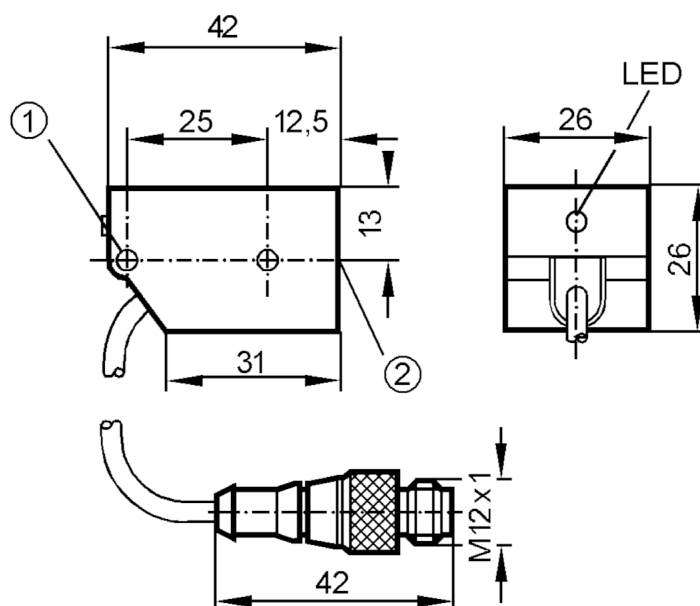

- 1 lubang pemasangan M4 diperkuat
2 Permukaan pendeteksian



Karakteristik produk

Desain kelistrikan	PNP/NPN
Fungsi output	biasanya tertutup
Jangkauan pendeteksian [mm]	10
Casing	persegi panjang
Dimensi [mm]	26 x 26 x 42

Data kelistrikan

Tegangan pengoperasian [V]	10...55 DC
Kelas perlindungan	II
Pelindung polaritas terbalik	ya

Output

Desain kelistrikan	PNP/NPN
Fungsi output	biasanya tertutup
Penurunan tegangan maks. pada output peralihan DC [V]	4.5
Arus beban minimal [mA]	2
Kebocoran arus maks. [mA]	0.6
Peringkat arus permanen dari output peralihan DC [mA]	100
Frekuensi peralihan DC [Hz]	250
Pelindung hubung singkat	ya



Sensor induktif

IOC2010-BRKG/0,80M/US/FRONT

Tipe pelindung hubung singkat		berpulsa	
Pelindung beban berlebih		ya	
Zona pendeteksian			
Jangkauan pendeteksian	[mm]	10	
Jangkauan pendeteksian real Sr	[mm]	10 ± 10 %	
Jarak pengoperasian	[mm]	0...8.1	
Akurasi/deviasi			
Faktor koreksi		baja: 1 / baja tahan karat: 0.7 / kuningan: 0.4 / aluminium: 0.3 / tembaga: 0.2	
Histeresis	[X01]	1...15	
Deviasi titik peralihan	[X01]	-10...10	
Kondisi pengoperasian			
Suhu sekitar	[°C]	-25...80	
Perlindungan		IP 67	
Pengujian/persetujuan			
EME		EN 60947-5-2	
		EN 55011	kelas B
Data teknis			
Casing		persegi panjang	
Permukaan pendeteksian		depan	
Pemasangan		flush mountable	
Dimensi	[mm]	26 x 26 x 42	
Material		PBT	
Elemen display/pengoperasian			
Display	status peralihan	1 x LED, merah	
Keterangan			
Jumlah paket		1 buah	
Koneksi listrik - colokan			
Kabel: 0.8 m, PUR			
Konektor: 1 x M12; pengkodean: A			
			



Sensor induktif

IOC2010-BRKG/0,80M/US/FRONT

Koneksi

