


Sensor induktif

IS-3002-BPKG/AS

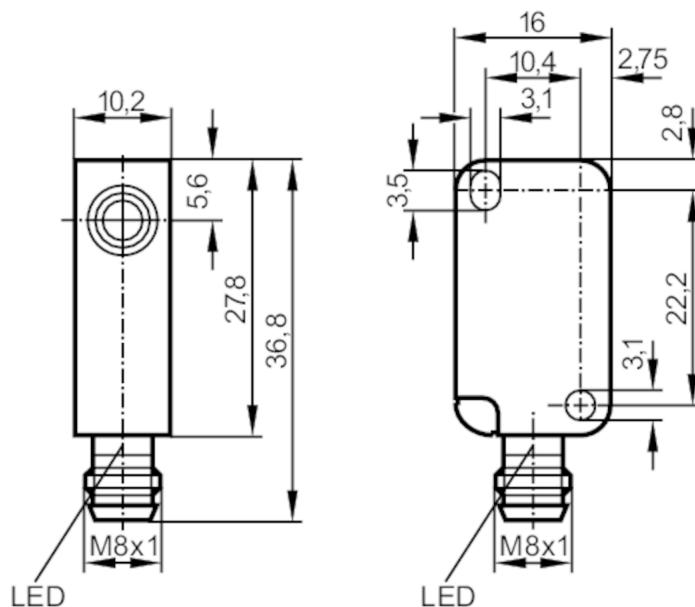

Karakteristik produk

Desain kelistrikan	PNP
Fungsi output	biasanya terbuka
Jangkauan pendeteksian [mm]	2
Casing	persegi panjang
Dimensi [mm]	28 x 10 x 16

Data kelistrikan

Tegangan pengoperasian [V]	10...30 DC
Konsumsi arus [mA]	15
Kelas perlindungan	III
Pelindung polaritas terbalik	ya

Output

Desain kelistrikan	PNP
Fungsi output	biasanya terbuka
Penurunan tegangan maks. pada output peralihan DC [V]	2.5
Peringkat arus permanen dari output peralihan DC [mA]	200
Frekuensi peralihan DC [Hz]	800
Pelindung hubung singkat	ya
Pelindung beban berlebih	ya

Zona pendeteksian

Jangkauan pendeteksian [mm]	2
Jangkauan pendeteksian real Sr	$2 \pm 10 \%$



Sensor induktif

IS-3002-BPKG/AS

Jarak pengoperasian	[mm]	0...1.6
---------------------	------	---------

Akurasi/deviasi

Faktor koreksi	baja: 1 / baja tahan karat: 0.7 / kuningan: 0.5 / aluminium: 0.4 / tembaga: 0.3	
Histeresis	[X01]	3...15
Deviasi titik peralihan	[X01]	-10...10

Kondisi pengoperasian

Suhu sekitar	[°C]	-20...80
Perlindungan	IP 65; (dengan soket ifm yang sudah dipasang dengan sekrup: IP 67)	

Pengujian/persetujuan

EME	EN 60947-5-2	
	EN 55011	kelas B
MTTF	[ANN]	3060

Data teknis

Berat	[g]	10.7
Casing	persegi panjang	
Pemasangan	flush mountable	
Dimensi	[mm]	28 x 10 x 16
Material	PBT	
Torsi pengencangan	[Nm]	< 0.5; (dengan washer)

Elemen display/pengoperasian

Display	status peralihan	4 x 90° LED, kuning
---------	------------------	---------------------

Keterangan

Jumlah paket	1 buah
--------------	--------

Koneksi listrik - colokan

Konektor: 1 x M8; pengkodean: A





Sensor induktif

IS-3002-BPKG/AS

Koneksi

