




Sensor induktif

IW-3008-BPKG/AS-610-TPS

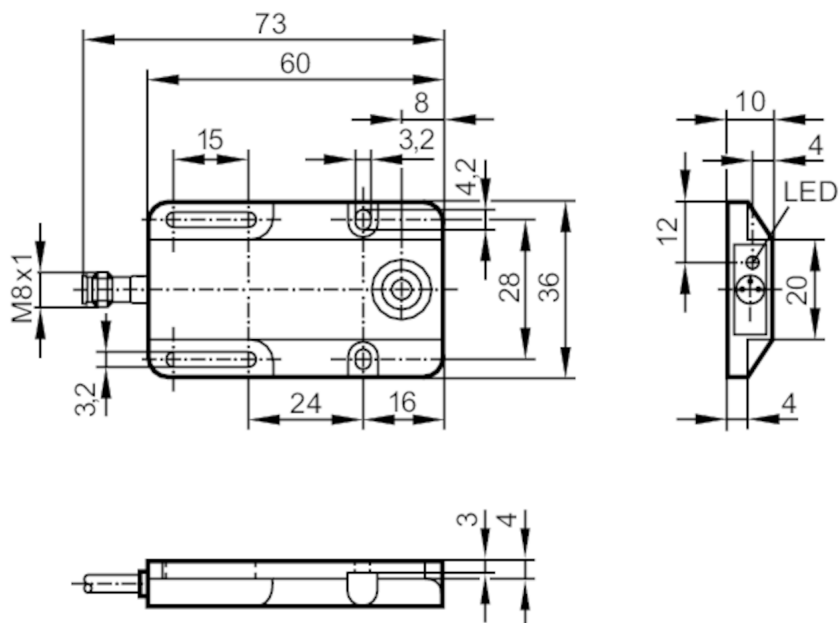

Karakteristik produk

Desain kelistrikan	PNP
Fungsi output	biasanya terbuka
Jangkauan pendeteksian [mm]	8
Casing	persegi panjang
Dimensi [mm]	60 x 36 x 10

Data kelistrikan

Tegangan pengoperasian [V]	10...36 DC
Konsumsi arus [mA]	15; (24 V)
Kelas perlindungan	III
Pelindung polaritas terbalik	ya

Output

Desain kelistrikan	PNP
Fungsi output	biasanya terbuka
Penurunan tegangan maks. pada output peralihan DC [V]	2.5
Peringkat arus permanen dari output peralihan DC [mA]	250
Frekuensi peralihan DC [Hz]	300
Pelindung hubung singkat	ya
Tipe pelindung hubung singkat	berpulsa
Pelindung beban berlebih	ya

Zona pendeteksian

Jangkauan pendeteksian [mm]	8
-----------------------------	---



Sensor induktif

IW-3008-BPKG/AS-610-TPS

Jangkauan pendeteksian real [mm] Sr	8 ± 10 %
Jarak pengoperasian [mm]	0...6.5

Akurasi/deviasi

Faktor koreksi	baja: 1 / baja tahan karat: 0.7 / kuningan: 0.4 / aluminium: 0.3 / tembaga: 0.2	
Histeresis [X01]	1...15	
Deviasi titik peralihan [X01]	-10...10	

Kondisi pengoperasian

Suhu sekitar [°C]	-20...80
Perlindungan	IP 65

Pengujian/persetujuan

EME	EN 60947-5-2	
	EN 55011	kelas B
MTTF [ANN]	2526	
Persetujuan UL	Ta	0...40 °C
	Tipe penutup	Type 1
	suplai tegangan	Hazardous voltage
	Nomor file UL	E174191

Data teknis

Berat [g]	24.8
Casing	persegi panjang
Pemasangan	non-flush mountable
Dimensi [mm]	60 x 36 x 10
Material	PBT

Elemen display/pengoperasian

Display	status peralihan	1 x LED, kuning
---------	------------------	-----------------

Keterangan

Jumlah paket	1 buah
--------------	--------

Koneksi listrik - colokan

Konektor: 1 x M8; pengkodean: A



Sensor induktif

IW-3008-BPKG/AS-610-TPS

Koneksi

