


Sensor NAMUR induktif

IIA2015-N/1D/1G/2G



Karakteristik produk

Desain kelistrikan	NAMUR
Fungsi output	biasanya tertutup
Jangkauan pendeteksian [mm]	15
Casing	tipe berulir
Dimensi [mm]	M30 x 1.5 / L = 41

Data kelistrikan

Koneksi ke amplifier pengalih	ya
Amplifier pengalih	koneksi ke sirkuit tersertifikasi yang aman secara intrinsik dengan nilai maks.: U = 15 V / I = 50 mA / P = 120 mW
Tegangan nominal DC [V]	8.2; (1kΩ)
Tegangan suplai DC [V]	7.5...30; (jika digunakan di luar area berbahaya)
Konsumsi arus [mA]	< 1; (dinonaktifkan; konduktif: > 2,1)
Kelas perlindungan	III

Output

Desain kelistrikan	NAMUR
Fungsi output	biasanya tertutup
Peringkat arus permanen dari output peralihan DC [mA]	30; (jika digunakan di luar area berbahaya)
Frekuensi peralihan DC [Hz]	200

Zona pendeteksian

Jangkauan pendeteksian [mm]	15
Jangkauan pendeteksian real Sr	15 ± 10 %

Akurasi/deviasi

Faktor koreksi	baja: 1 / baja tahan karat: 0.7 / kuningan: 0.5 / aluminium: 0.4 / tembaga: 0.3
Histeresis [X01]	1...15
Deviasi titik peralihan [X01]	-10...10

Kondisi pengoperasian


Suhu sekitar [°C]	-20...80
Perlindungan	IP 67



Sensor NAMUR induktif

IIA2015-N/1D/1G/2G

Pengujian/persetujuan	
Persetujuan	PTB 01 ATEX 2191; BVS 04 ATEX E 153 X; IECEX BVS 06.0003X; TIIS TC16109
Tanda ATEX	II 1G Ex ia IIB T6 Ga Ta -20...70°C
	II 1G Ex ia IIB T5 Ga Ta -20...80°C
	II 2G Ex ia IIC T6 Gb Ta -20...70°C
	II 2G Ex ia IIC T5 Gb Ta -20...80°C
	II 1D Ex ia IIIC T20090°C Da Ta: -20...70°C
	II 1D Ex ia IIIC T200100°C Da Ta: -20...80°C
EME	EN 60947-5-6
Tahan guncangan/getaran	30 g (11 ms) / 10-55 Hz (1 mm)
MTTF [ANN]	4697
Klasifikasi keamanan	
Kapasitansi internal maks. [nF]	145
Induktansi internal maks. [μH]	110
Data teknis	
Berat [g]	221.5
Casing	tipe berulir
Pemasangan	non-flush mountable
Dimensi [mm]	M30 x 1.5 / L = 41
Penamaan ulir	M30 x 1.5
Material	kuningan lapisan khusus; permukaan pendeteksian: PBT
Aksesori	
Item dikirim	mur pengunci: 2
Keterangan	
Jumlah paket	1 buah
Koneksi listrik	
Kabel: 2 m, PVC; 2 x 0.5 mm ²	
Koneksi	

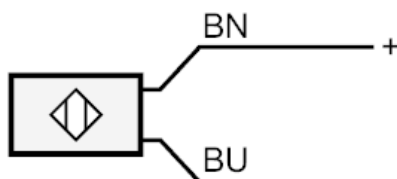

BN = Warna core :
 BU = coklat
 biru