




Receiver sensor sinar tembus

OJE-FPKG/SO

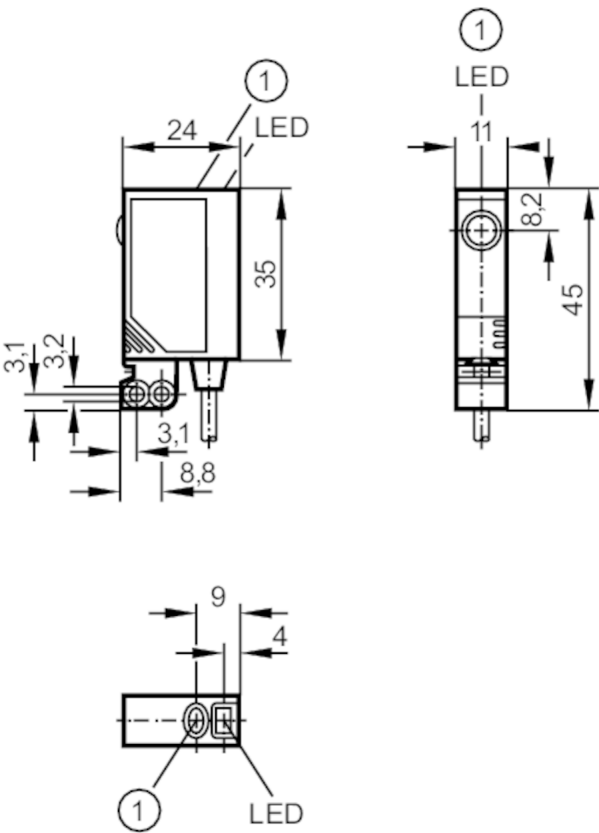

1 tombol tekan



Karakteristik produk		
Tipe cahaya		cahaya merah
Casing		persegi panjang
Aplikasi		
Prinsip fungsi		Sensor sinar tembus
Data kelistrikan		
Tegangan pengoperasian [V]		10...30 DC
Konsumsi arus [mA]		< 12
Kelas perlindungan		III
Pelindung polaritas terbalik		ya
Tipe cahaya		cahaya merah
Panjang gelombang [nm]		660
Output		
Desain kelistrikan		PNP
Fungsi output		mode light-on/dark-on; (dapat diprogram)
Penurunan tegangan maks. pada output peralihan DC [V]		2.5
Peringkat arus permanen dari output peralihan DC [mA]		200



Receiver sensor sinar tembus

OJE-FPKG/SO

Frekuensi peralihan DC	[Hz]	1200
Pelindung hubung singkat		ya
Tipe pelindung hubung singkat		berpulsa
Pelindung beban berlebih		ya
Zona pendeteksian		
Transmitter/receiver		receiver
Jarak jangkauan	[m]	< 10
Jangkauan yang dapat disesuaikan		ya
Kondisi pengoperasian		
Suhu sekitar	[°C]	-25...60
Perlindungan		IP 67
Pengujian/persetujuan		
EME	EN 60947-5-2	
MTTF	[ANN]	952
Data teknis		
Berat	[g]	72.5
Casing		persegi panjang
Dimensi	[mm]	35 x 11 x 24
Material		casing: ABS; perlengkapan: seng tuang; Jendela LED: SEPS; tombol tekan: SEPS
Material lensa		kaca
Penyelarasan lensa		lensa samping
Elemen display/pengoperasian		
Display	status peralihan	1 x LED, kuning
	operasi	1 x LED, hijau
	fungsi	1 x LED, merah
Kunci elektronik		ya
Aksesori		
Item dikirim		Klip dasar: 1, E20964
		sekrup: 2 x M3 x 16
		Washer pegas: 2
		Mur: 2
Keterangan		
Keterangan		tegangan pengoperasian "kelas suplai 2" menurut cULus
Jumlah paket		1 buah


Receiver sensor sinar tembus

OJE-FPKG/SO

Koneksi listrik

Kabel: 2 m, PVC; 4 x 0.14 mm²

Koneksi

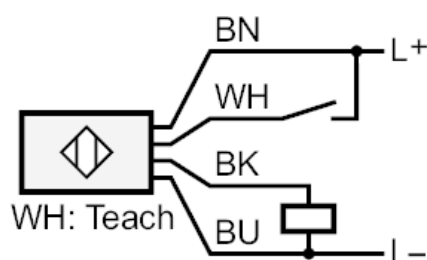

BK =	Warna core :
BN =	hitam
BU =	coklat
WH =	biru
	putih

Diagram dan grafik

grafik excess gain

