



Receiver sensor sinar tembus

OJE-FPKG/SO/AS



1 tombol tekan



Karakteristik produk

|             |                 |
|-------------|-----------------|
| Tipe cahaya | cahaya merah    |
| Casing      | persegi panjang |

Aplikasi

|                |                     |
|----------------|---------------------|
| Prinsip fungsi | Sensor sinar tembus |
|----------------|---------------------|

Data kelistrikan

|                              |              |
|------------------------------|--------------|
| Tegangan pengoperasian [V]   | 10...30 DC   |
| Konsumsi arus [mA]           | < 12         |
| Kelas perlindungan           | III          |
| Pelindung polaritas terbalik | ya           |
| Tipe cahaya                  | cahaya merah |
| Panjang gelombang [nm]       | 660          |

Output

|                                                       |                                          |
|-------------------------------------------------------|------------------------------------------|
| Desain kelistrikan                                    | PNP                                      |
| Fungsi output                                         | mode light-on/dark-on; (dapat diprogram) |
| Penurunan tegangan maks. pada output peralihan DC [V] | 2.5                                      |
| Peringkat arus permanen dari output peralihan DC [mA] | 200                                      |



## Receiver sensor sinar tembus

OJE-FPKG/SO/AS

|                               |          |
|-------------------------------|----------|
| Frekuensi peralihan DC [Hz]   | 1200     |
| Pelindung hubung singkat      | ya       |
| Tipe pelindung hubung singkat | berpulsa |
| Pelindung beban berlebih      | ya       |

## Zona pendeteksian

|                                  |          |
|----------------------------------|----------|
| Transmitter/receiver             | receiver |
| Jarak jangkauan [m]              | < 10     |
| Jangkauan yang dapat disesuaikan | ya       |

## Kondisi pengoperasian

|                   |          |
|-------------------|----------|
| Suhu sekitar [°C] | -25...60 |
| Perlindungan      | IP 67    |

## Pengujian/persetujuan

|            |              |
|------------|--------------|
| EME        | EN 60947-5-2 |
| MTTF [ANN] | 952          |

## Data teknis

|                    |                                                    |
|--------------------|----------------------------------------------------|
| Berat [g]          | 26.9                                               |
| Casing             | persegi panjang                                    |
| Dimensi [mm]       | 35 x 11 x 24                                       |
| Material           | casing: ABS; Jendela LED: SEPS; tombol tekan: SEPS |
| Material lensa     | kaca                                               |
| Penyelarasan lensa | lensa samping                                      |

## Elemen display/pengoperasian

|                  |                  |                 |
|------------------|------------------|-----------------|
| Display          | status peralihan | 1 x LED, kuning |
|                  | operasi          | 1 x LED, hijau  |
|                  | fungsi           | 1 x LED, merah  |
| Kunci elektronik | ya               |                 |

## Aksesori

|              |                 |
|--------------|-----------------|
| Item dikirim | sekrup: 2       |
|              | Washer pegas: 2 |
|              | Mur: 2          |

## Keterangan

|              |                                                       |
|--------------|-------------------------------------------------------|
| Keterangan   | tegangan pengoperasian "kelas suplai 2" menurut cULus |
| Jumlah paket | 1 buah                                                |

## Koneksi listrik


Konektor: 1 x M8; pengkodean: A



## Receiver sensor sinar tembus

OJE-FPKG/SO/AS

## Koneksi

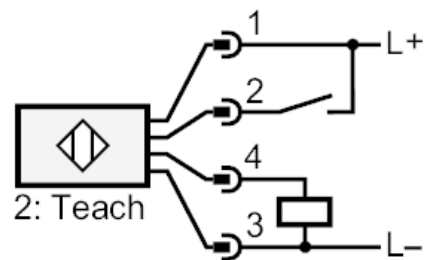

2 Teach

## Diagram dan grafik

grafik excess gain

