


Sensor retro-reflektif

OMP-FKOW/T/LS-500



receiver di lensa bawah
transmitter di lensa atas

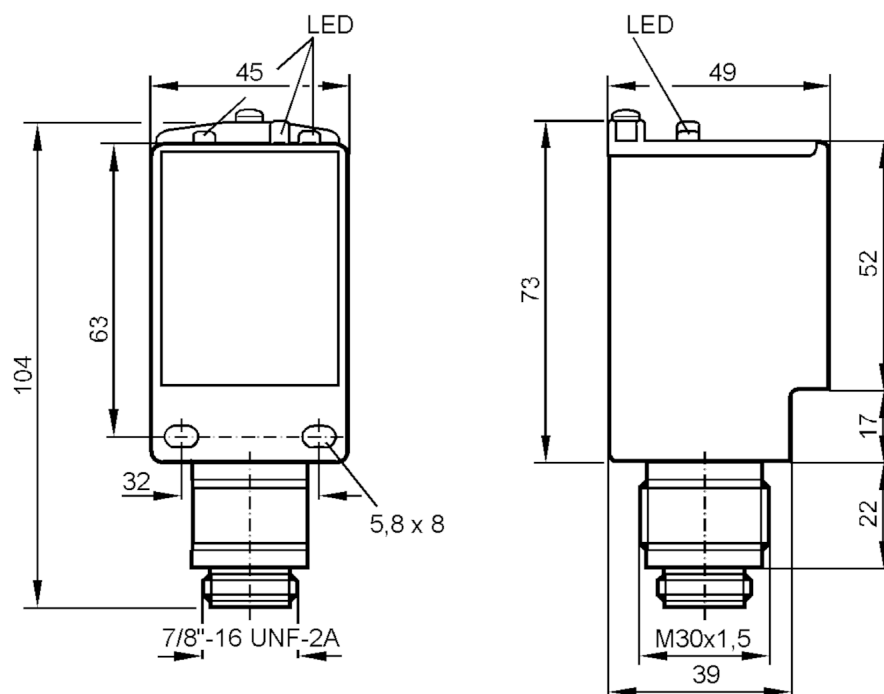

Karakteristik produk

Tipe cahaya	cahaya merah
Casing	persegi panjang

Aplikasi

Fitur khusus	filter polarisasi
Prinsip fungsi	Sensor retro-reflektif

Data kelistrikan

Frekuensi AC	[Hz]	47...63
Tegangan pengoperasian	[V]	24...240 AC/DC
Konsumsi daya maks.	[VA]	6
Kelas perlindungan		II
Tipe cahaya		cahaya merah
Panjang gelombang	[nm]	660
Tipe masa pakai	[h]	100000
Suhu referensi untuk masa pakai	[°C]	25

Output

Desain kelistrikan	relai
Fungsi output	mode light-on/dark-on; (dapat diprogram)
Peringkat kontak	3A / 250 V AC
Frekuensi peralihan AC [Hz]	10
Frekuensi peralihan DC [Hz]	10



Sensor retro-reflektif

OMP-FKOW/T/LS-500

Pelindung hubung singkat	tidak
Fungsi waktu [s]	0 / 1 / 5 / 10 / 14

Zona pendeteksian

Jangkauan yang dirujuk pada reflektor prismatik [m]	13.5; (Reflektor prismatik Ø 80 E20005)
Tersedia filter polarisasi	ya

Waktu respons

Waktu respons [s]	< 10
-------------------	------

Kondisi pengoperasian

Suhu sekitar [°C]	-25...40
Perlindungan	IP 67

Data teknis

Berat [g]	198.5
Casing	persegi panjang
Dimensi [mm]	73 x 45 x 49
Material	ABS diperkuat dengan serat kaca
Material lensa	PMMA
Penyelarasan lensa	lensa samping

Elemen display/pengoperasian


Display	status peralihan	1 x LED, kuning
	operasi	1 x LED, hijau
	fungsi	1 x LED, merah

Keterangan

Jumlah paket	1 buah
--------------	--------

Koneksi listrik

Konektor: 1 x 7/8"; pengkodean: A; Penguncian: aluminium, dianodisasi tidak berwarna





Sensor retro-reflektif

OMP-FKOW/T/LS-500

Koneksi

