




Receiver sensor sinar tembus

OTE-FPKG/US-100-IPF

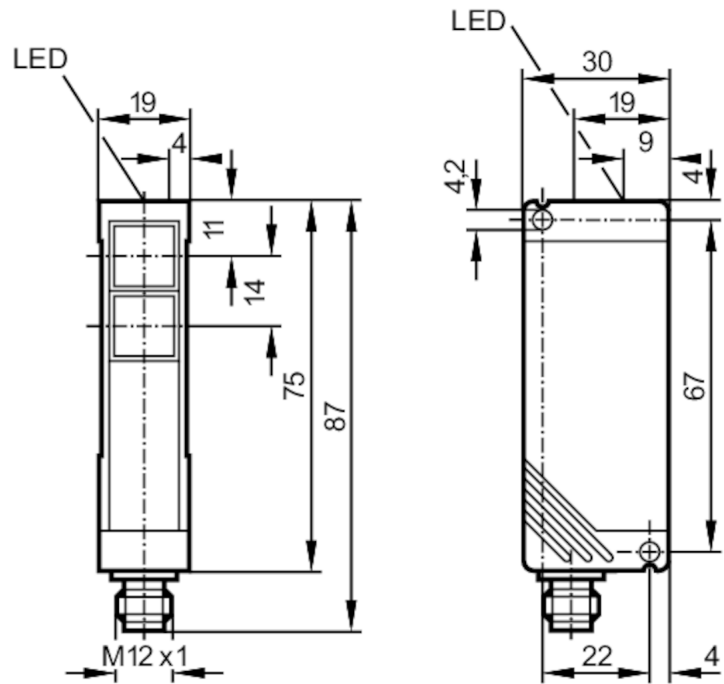

receiver di lensa bawah



Karakteristik produk		
Tipe cahaya		cahaya inframerah
Casing		persegi panjang
Aplikasi		
Prinsip fungsi		Sensor sinar tembus
Data kelistrikan		
Tegangan pengoperasian	[V]	10...50 DC
Konsumsi arus	[mA]	30; ((24 V))
Kelas perlindungan		II
Pelindung polaritas terbalik		ya
Tipe cahaya		cahaya inframerah
Panjang gelombang	[nm]	880
Output		
Desain kelistrikan		PNP
Fungsi output		mode light-on/dark-on; (dapat diprogram)
Penurunan tegangan maks. pada output peralihan DC	[V]	2.5
Peringkat arus permanen dari output peralihan DC	[mA]	250
Frekuensi peralihan DC	[Hz]	150
Pelindung hubung singkat		ya
Tipe pelindung hubung singkat		berpulsa



Receiver sensor sinar tembus

OTE-FPKG/US-100-IPF

Pelindung beban berlebih	ya
--------------------------	----

Zona pendeteksian

Transmitter/receiver	receiver
Jarak jangkauan [m]	< 10
Jangkauan yang dapat disesuaikan	ya

Kondisi pengoperasian

Suhu sekitar [°C]	-25...60
Perlindungan	IP 65

Pengujian/persetujuan

EME	EN 60947-5-2	
	EN 55011	kelas B
MTTF [ANN]	573	

Data teknis

Berat [g]	161
Casing	persegi panjang
Material	PBT
Material lensa	PMMA
Penyelarasan lensa	lensa samping

Elemen display/pengoperasian

Display	status peralihan	1 x LED, kuning
	operasi	1 x LED, hijau

Aksesori

Item dikirim	Braket siku: 1, E20461
	obeng

Keterangan

Jumlah paket	1 buah
--------------	--------

Koneksi listrik

Konektor: 1 x M12; pengkodean: A



Receiver sensor sinar tembus

OTE-FPKG/US-100-IPF

Koneksi


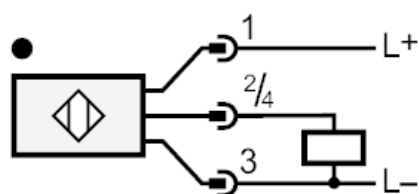


Diagram dan grafik

grafik excess gain

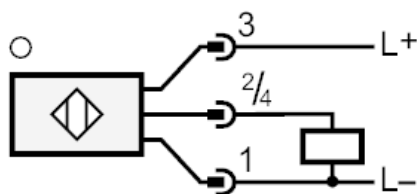