




Encoder inkremental dengan poros berongga

RO-1024-I05/N4U

Produk tidak tersedia - entri arsip

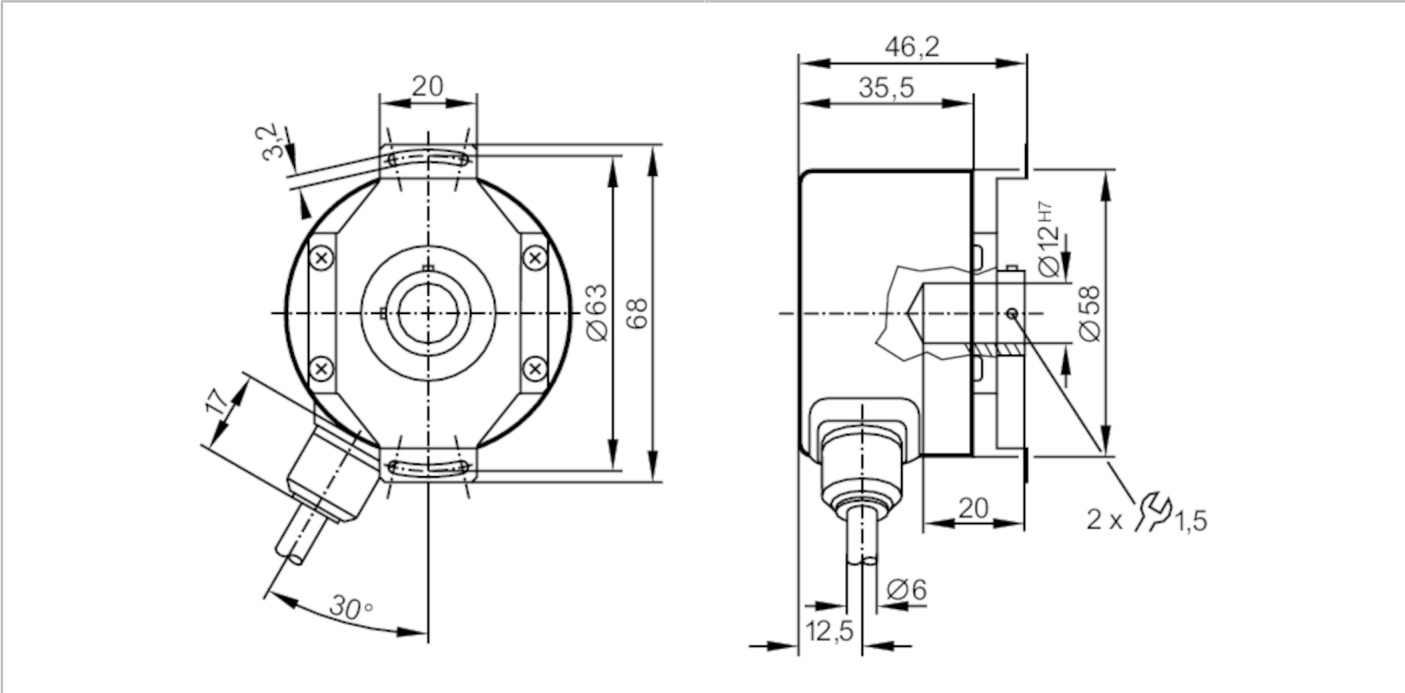

Karakteristik produk		
Resolusi		1024 resolusi
Desain poros		poros berongga terbuka ke satu sisi
Diameter poros	[mm]	12
Data kelistrikan		
Toleransi tegangan pengoperasian	[%]	10
Tegangan pengoperasian	[V]	5 DC
Konsumsi arus	[mA]	< 150
Output		
Desain kelistrikan		TTL
Beban arus maks. per output	[mA]	20
Frekuensi peralihan	[kHz]	300
Perbedaan fase A dan B	[°]	90
Rentang pengukuran/pengaturan		
Resolusi		1024 resolusi
Kondisi pengoperasian		
Suhu sekitar	[°C]	-30...100
Suhu penyimpanan	[°C]	-30...100
Kelembapan udara relatif maks.	[%]	98
Perlindungan		IP 64



Encoder inkremental dengan poros berongga

RO-1024-I05/N4U

Pengujian/persetujuan		
Tahan guncangan		100 g (6 ms)
Ketahanan terhadap getaran		10 g (55...2000 Hz)
Data teknis		
Dimensi	[mm]	Ø 58 / L = 35.5
Material		aluminium
Putaran maks., mekanis	[U/min]	12000
Torsi awal maks.	[Nm]	2.5
Torsi suhu referensi	[°C]	20
Desain poros		poros berongga terbuka ke satu sisi
Diameter poros	[mm]	12
Penyesuaian poros		H7
Material poros		baja tahan karat
Kedalaman pemasangan poros	[mm]	10
Ketidaksejajaran poros aksial maks.	[mm]	1; (kesejajaran poros radial maks.: ± 0,05 mm)
Koneksi listrik		
Kabel: 4 m, PUR; radial		
coklat	A	
hijau	A dibalik	
abu-abu	B	
merah muda	B dibalik	
merah	indeks 0	
hitam	indeks 0 dibalik	
biru	L+ sensor	
putih	0V sensor	
coklat/hijau	L+ (Up)	
putih/hijau	0V (Un)	
ungu	kegagalan dibalik	
penutup	casing	
Diagram dan grafik		
Diagram pulsa	arah putaran searah jarum jam (menghadap poros)	