


Encoder inkremental dengan poros solid

RV-2048-I05/L2

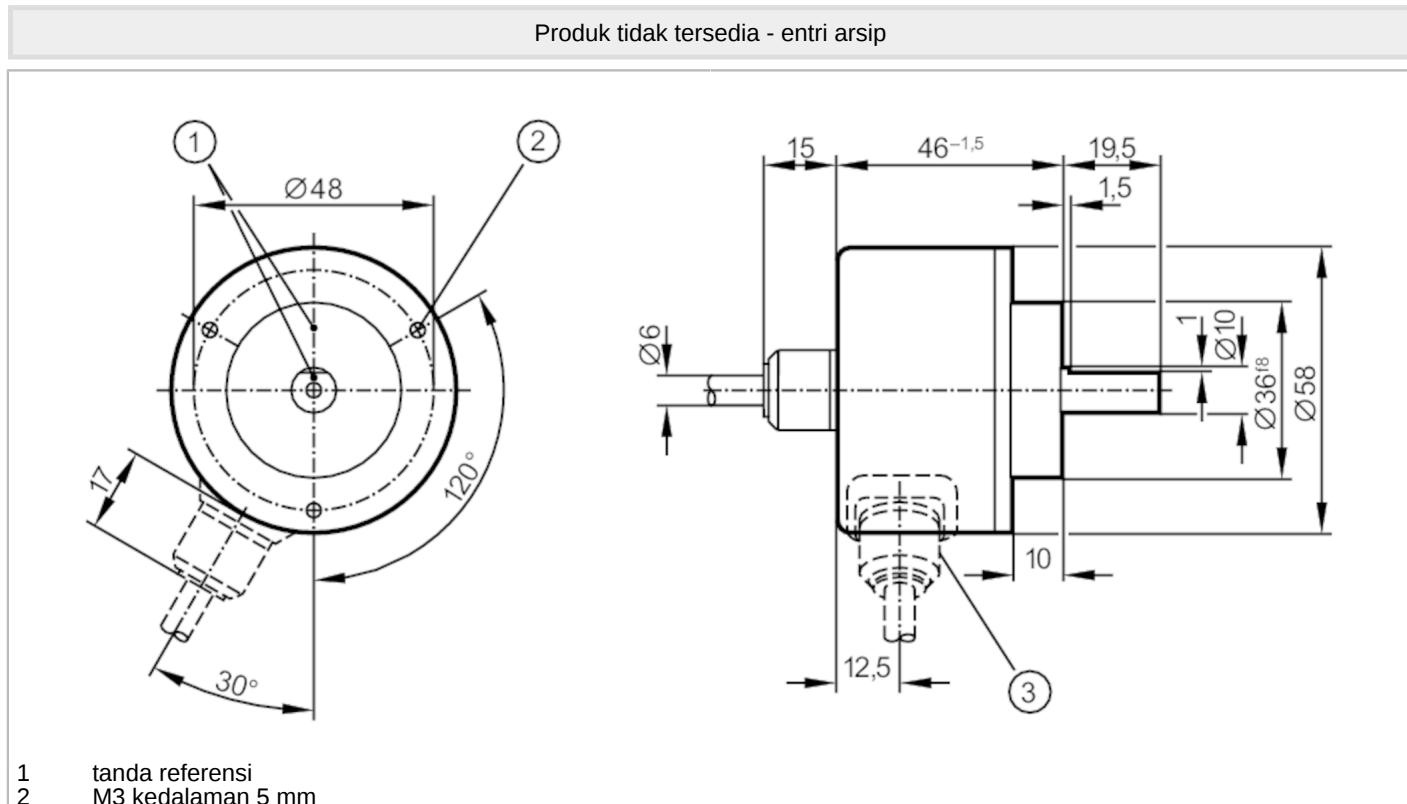

Karakteristik produk

Resolusi	2048 resolusi
Desain poros	poros solid
Diameter poros [mm]	10

Data kelistrikan

Toleransi tegangan pengoperasian [%]	10
Tegangan pengoperasian [V]	5 DC
Konsumsi arus [mA]	150

Output

Desain kelistrikan	TTL
Beban arus maks. per output [mA]	20
Frekuensi peralihan [kHz]	300
Perbedaan fase A dan B [°]	90

Rentang pengukuran/pengaturan

Resolusi	2048 resolusi
----------	---------------

Kondisi pengoperasian

Suhu sekitar [°C]	-30...100
Catatan tentang suhu sekitar	untuk kabel yang dipasang dengan kuat: -30 °C
Suhu penyimpanan [°C]	-30...100
Kelembaban udara relatif maks. [%]	98

Encoder inkremental dengan poros solid

RV-2048-I05/L2

Perlindungan

IP 64

Pengujian/persetujuan

Tahan guncangan	100 g (6 ms)
Ketahanan terhadap getaran	10 g (55...2000 Hz)

Data teknis

Dimensi	[mm]	Ø 58 / L = 46
Material		aluminium
Putaran maks., mekanis	[U/min]	12000
Torsi awal maks.	[Nm]	1
Torsi suhu referensi	[°C]	20
Desain poros		poros solid
Diameter poros	[mm]	10
Material poros		baja (1.4104)
Beban poros aksial maks. (di ujung poros)	[N]	10
Beban poros radial maks. (di ujung poros)	[N]	20


Koneksi listrik

Kabel: 2 m, PUR; aksial

coklat	A
hijau	A dibalik
abu-abu	B
merah muda	B dibalik
merah	indeks 0
hitam	indeks 0 dibalik
biru	L+ sensor
putih	0V sensor
coklat/hijau	L+ (Up)
putih/hijau	0V (Un)
ungu	kegagalan dibalik
penutup	casing

Diagram dan grafik

Diagram pulsa



arah putaran searah jarum jam (menghadap poros)