




AS-Interface control cabinet module

SmartL25 4 DI T C

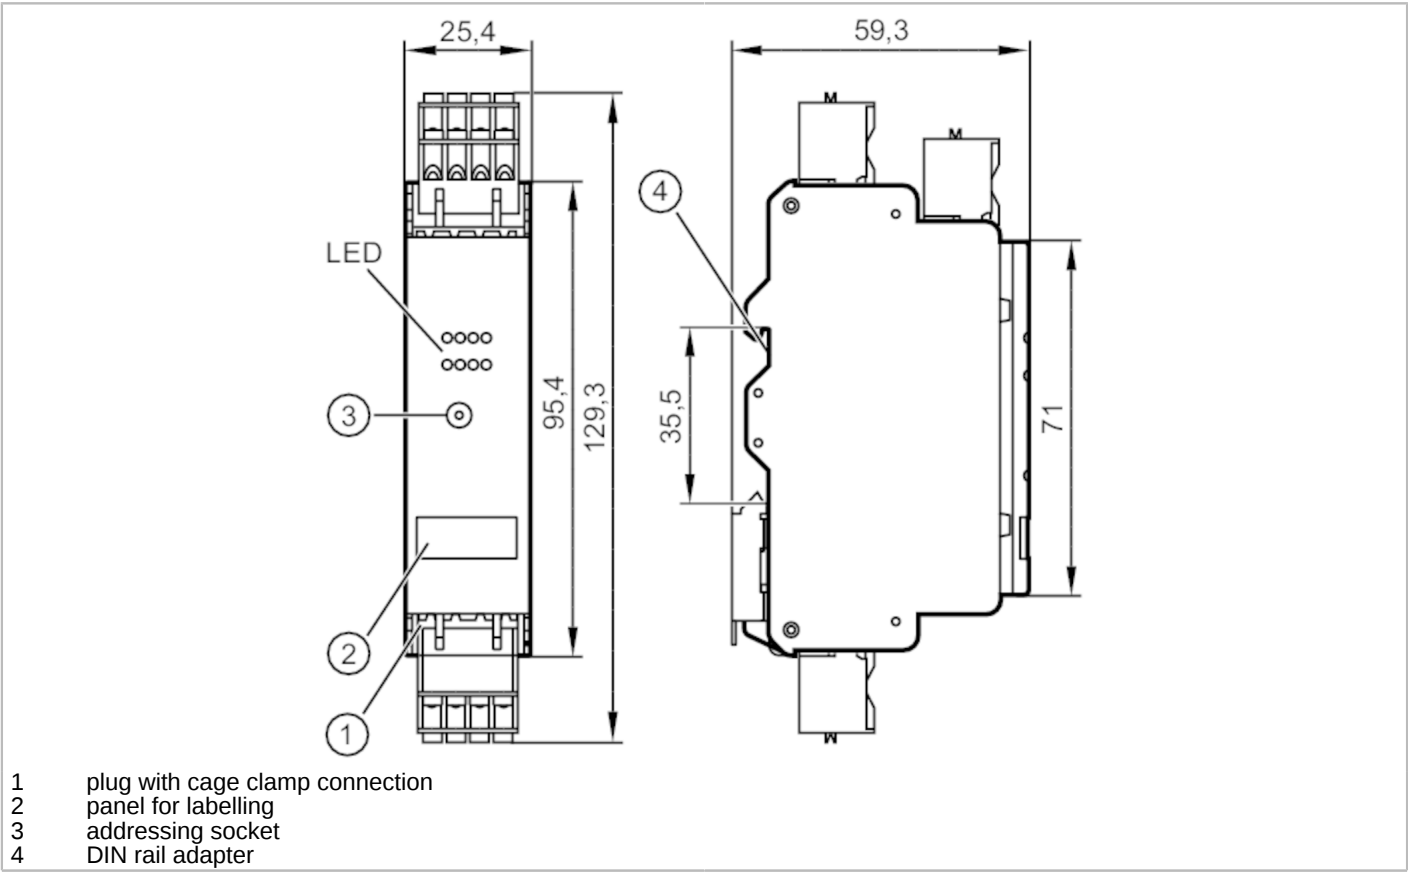

Application	
Application	Installation in control cabinets
Electrical data	
Operating voltage [V]	18...31.6 DC
Max. current consumption from AS-i [mA]	250
Inputs / outputs	
Number of inputs and outputs	Number of digital inputs: 4
Inputs	
Number of digital inputs	4
Input circuit of digital inputs	PNP; (type 2 according to IEC 61131-2)
Sensor supply of the inputs	AS-i
Power supply [V]	18...30; (DC)
Max. total current rating of inputs [mA]	200
Input current High [mA]	6...10
Input current Low [mA]	0...2
Switching level high [V]	> 11
Digital inputs protected against short circuits	yes



AS-Interface control cabinet module

SmartL25 4 DI T C

Operating conditions						
Ambient temperature	[°C]	-25...60				
Storage temperature	[°C]	-25...75				
Max. relative air humidity	[%]	90; (non condensing)				
Max. height above sea level	[m]	2000				
Protection		IP 20				
Protection rating terminals		IP 20				
Pollution degree		2				
Tests / approvals						
EMC		EN 62026-2				
		EN 61000-6-2				
		EN 61000-6-3				
MTTF	[years]	437				
AS-i classification						
AS-i version		2.11; 3.0				
AS-i addressing		addressing socket				
Extended addressing mode		yes				
AS-i master profile		M2; M3; M4				
AS-i profile		S-0.A.E				
AS-i I/O configuration	[hex]	0				
AS-i ID code	[hex]	A.E				
AS-i certificate		124402				
Assignment of the data bits	data bit	D0	D1	D2	D3	
	input	I-1	I-2	I-3	I-4	
Mechanical data						
Weight	[g]	126.7				
Type of mounting		mounting on DIN rail				
Materials		plastics; PC-GF20				
Displays / operating elements						
Display	switching status				LED, yellow I1...I4	
	operation				LED, green AS-i	
	errors				LED, red	
Accessories						
Items supplied		cage clamps				
Remarks						
Remarks	Do not connect any of the following points to an external potential:					
	I-, I+, I1, I2, I3, I4					
	The connections are electrically connected with the AS-i cable.					
Pack quantity		1 pcs.				




AS-Interface control cabinet module

SmartL25 4 DI T C

Electrical connection

pin headers: 4 x ; Spacing: 5.0 mm

Connection

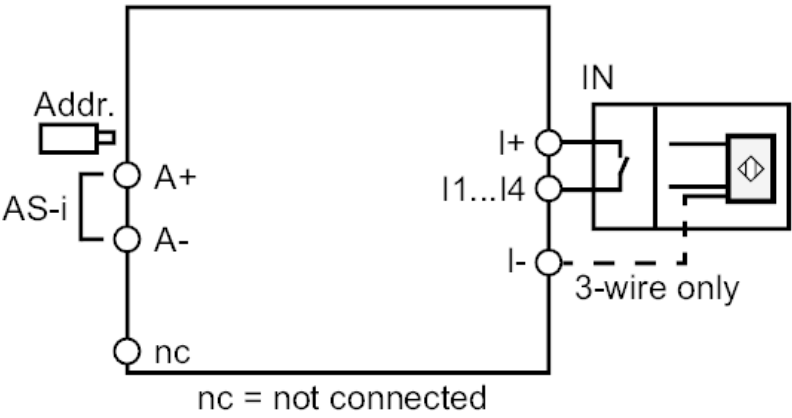

A+	AS-i +
A-	AS-i -
I+	Sensor supply +24V
I-	Sensor supply 0V
I1...I4	switching input sensor 1...4
n.c.	not used