




Continuous level sensor (guided wave radar)

LR0000B-BR34AVPKG/US

For high process temperatures: The temperature at the process connection is decisive. The actual medium temperature may be higher.

For 8-pole sockets the core colours are not standardised.  
Please note the wiring of the sensor and the sockets (see data sheet).

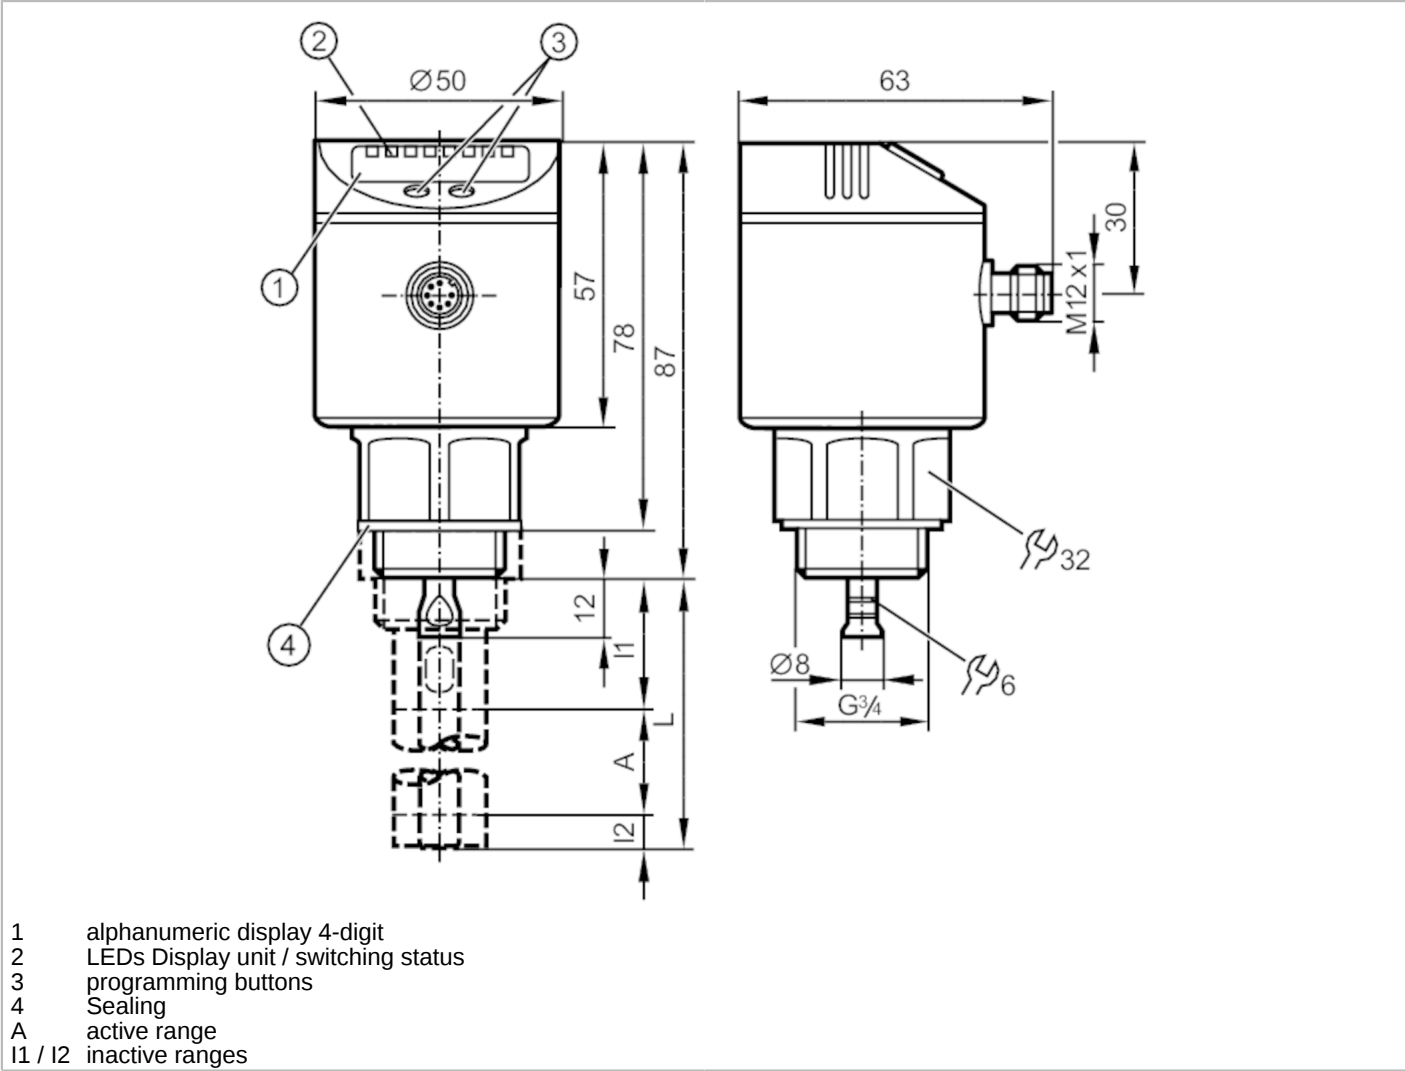

Product characteristics	
Number of inputs and outputs	Number of digital outputs: 4
Probe length L [mm]	100...1600
Process connection	threaded connection G 3/4 external thread
Application	
Special feature	Gold-plated contacts
Application	for industrial applications
Installation	Operation only in conjunction with rod and coaxial pipe.
Media	Liquids
Dielectric constant of the medium	≥ 2



## Continuous level sensor (guided wave radar)

LR0000B-BR34AVPKG/US

Recommended media	water; hydrous media; hydrous coolants; oils; oil-based media
Cannot be used for	See the operating instructions, chapter "Function and features".
Process temperature [°C]	0...80; (see note under remarks)
Pressure rating [bar]	4
Vacuum resistance [mbar]	-500

Electrical data	
Operating voltage [V]	18...30 DC
Current consumption [mA]	< 30
Protection class	III
Reverse polarity protection	yes
Power-on delay time [s]	< 3
Measuring principle	guided wave radar

Inputs / outputs	
Number of inputs and outputs	Number of digital outputs: 4

Outputs	
Total number of outputs	4
Output signal	switching signal
Electrical design	PNP
Number of digital outputs	4
Output function	normally open / normally closed; (parameterisable)
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	200
Short-circuit protection	yes
Type of short-circuit protection	thermal, pulsed
Overload protection	yes

Measuring/setting range	
Probe length L [mm]	100...1600
Active range A [mm]	L-40; (when set to oil and oil based media: L-60)
Inactive range I1 / I2 [mm]	30 / 10; (when set to oil and oil based media: 30 / 30)
Sampling rate [Hz]	4

Setting range	
Set point SP [mm]	15...L-30
Note on setpoint SP	when set to oil and oil based media: 35...L-30
Reset point rP [mm]	10... L-35
Note on reset point rP	when set to oil and oil based media: 30...L-35
In steps of [mm]	5
Hysteresis [mm]	> 5
Overflow switch point OP [mm]	70...L-30
Hysteresis, OP [mm]	10

Accuracy / deviations	
Repeatability [mm]	± 5

# LR8010



## Continuous level sensor (guided wave radar)

LR0000B-BR34AVPKG/US

Measuring error	[mm]	± 7
Offset error	[mm]	5
Resolution	[mm]	1
Temperature drift per 10 K		± 0.2 %

### Interfaces

Communication interface	IO-Link	
Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9	
Profiles	no profile	
SIO mode	yes	
Required master port type	A	
Process data analogue	1	
Process data binary	4	
Min. process cycle time	[ms]	2.3
Supported DeviceIDs	<b>Type of operation</b>	<b>DeviceID</b>
	default	1250

### Operating conditions

Ambient temperature	[°C]	0...60
Storage temperature	[°C]	-25...80
Protection		IP 67

### Tests / approvals

Approval	WHG; General building authority approval; overflow prevention	
EMC	DIN EN 61000-6-2	
	DIN EN 61000-6-3	in a closed metal tank
	DIN EN 61000-6-4	in plastic or open metal tanks
Shock resistance	DIN EN 60068-2-27	50 g (11 ms) / 25 g (6 ms) with reference rod 0.5 m
Vibration resistance	DIN EN 60068-2-6	5 g (10...2000 Hz) / 1 g (5...200 Hz) with reference rod 0.5 m
MTTF	[years]	198

### Mechanical data

Weight	[g]	402
Materials	stainless steel (316L/1.4404); stainless steel (304/1.4301); FKM; PBT; PC; PEI; TPE-V	
Materials (wetted parts)	sensor:: stainless steel (303/1.4305); stainless steel (316L/1.4435); PTFE; FKM; NBR reinforced fibre; Probe:: stainless steel (316L/1.4404); Coaxial pipe:: stainless steel (304/1.4301); stainless steel (316L/1.4404); stainless steel (301/1.4310); PPS reinforced fibre	
Process connection	threaded connection G 3/4 external thread	

### Displays / operating elements

Display	Display unit	3 x LED, green
	switching status	4 x LED, yellow
	level	alphanumeric display, 4-digit
	parameter setting	alphanumeric display, 4-digit

# LR8010



## Continuous level sensor (guided wave radar)

LR0000B-BR34AVPKG/US


Remarks	
Notes	For high process temperatures: The temperature at the process connection is decisive. The actual medium temperature may be higher.
Pack quantity	1 pcs.

### Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated



### Connection

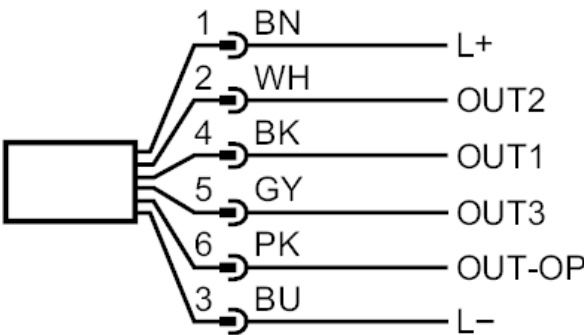

OUT1: IO-Link / switching output  
OUT2: switching output  
OUT3: switching output  
OUT-OP: switching output overflow prevention  
colours to DIN EN 60947-5-2

Core colours :

BN = brown  
WH = white  
BK = black  
GY = grey  
PK = pink  
BU = blue

# LR8010



## Continuous level sensor (guided wave radar)

LR0000B-BR34AVPKG/US

### Diagrams and graphs

Measurement deviation D at the limits of the active rod range

