


DTE910



RFID evaluation unit UHF

DTEUHFEA_ABRWEIUS04

Article no longer available - archive entry

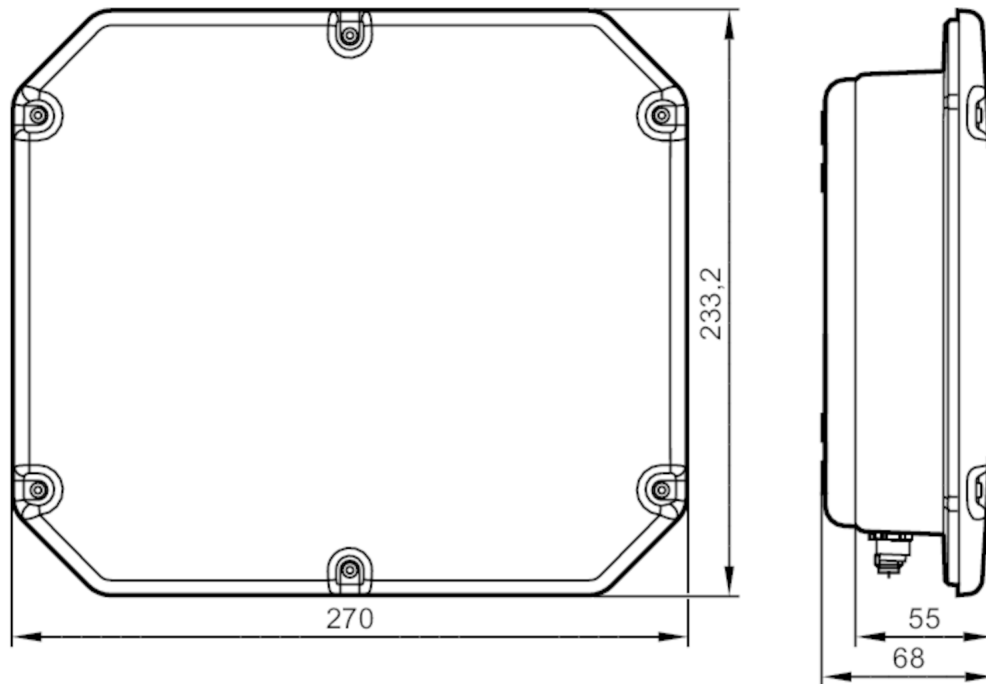

Application

Radio approval for	USA; Canada; Indonesia
--------------------	------------------------

Electrical data

Operating voltage	[V]	24 DC
Current consumption	[mA]	700
Operating frequency	[MHz]	902...928 (FCC); (Singapore: 920...925 MHz The operating frequency is activated by setting the communication standard to Singapore.)
Antenna connections		4; (TNC Reverse)
RFID standard		EPC Class1 GEN2/ISO 18000-6C
Transmission power ERP	[mW]	2000; (Singapore: ≤ 676 mW ERP The transmitter power must be limited manually by the user.)
Impedance	[Ω]	50

Inputs / outputs

Number of inputs and outputs	Number of digital inputs: 4; Number of digital outputs: 4
------------------------------	---

Inputs

Number of digital inputs	4
--------------------------	---

Outputs

Number of digital outputs	4
Max. current load per output	[mA] 500

Software / programming

Parameter setting options	Software
---------------------------	----------



RFID evaluation unit UHF

DTEUHFEA_ABRWEIUS04

Interfaces		
Communication interface	Ethernet	
Ethernet		
Protocol	TCP/IP; IP	
Operating conditions		
Ambient temperature	[°C]	-25...55
Storage temperature	[°C]	-25...85
Protection	IP 65	
Mechanical data		
Weight	[g]	3125
Housing	rectangular	
Dimensions	[mm]	233.5 x 270 x 68
Materials	housing: aluminium; Protective cover: plastics; TNC socket: brass / PTFE; connector: brass / plastic	
Displays / operating elements		
Display	operation	1 x LED, red/green
Remarks		
Pack quantity	1 pcs.	
Electrical connection - Ethernet		
Connector: 1 x M12; coding: D		
1 2 4 3 		
1	TD+	
2	RD+	
3	TD-	
4	RD-	



- | | |
|---|-----|
| 1 | TD+ |
| 2 | RD+ |
| 3 | TD- |
| 4 | RD- |




RFID evaluation unit UHF

DTEUHFEA_ABRWEIUS04

Electrical connection - Process connection


Connector: 1 x M12; coding: A



1	switching output CMN
2	switching input 3 / switching input 0
3	switching input CMN
4	0 V
5	U+
6	switching output 3 / switching output 1
7	switching output 2 / switching output 0
8	switching input 2 / switching input 1

Electrical connection - current supply

Connector: 1 x M12; coding: A



1	U+
2	n.c.
3	0 V
4	n.c.