


E80392



RFID antenna adapter to increase the travel speed

ANT-AMP/490x40/KQ

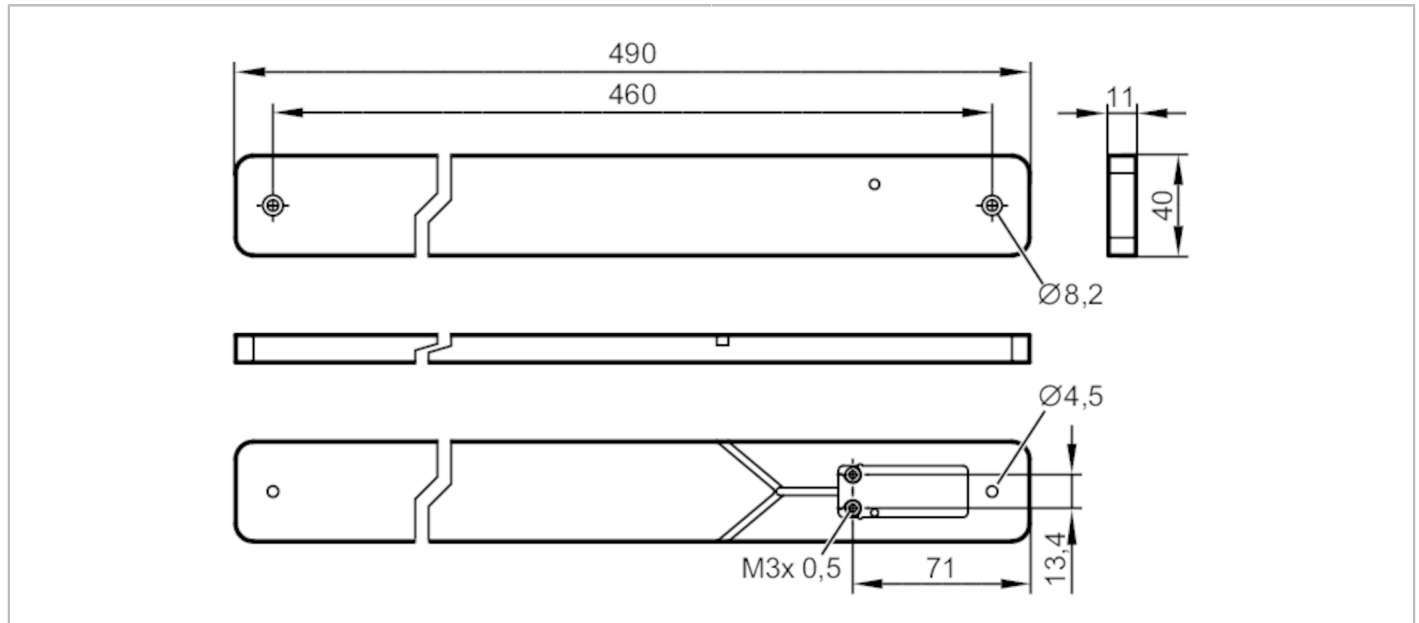

Electrical data			
Operating frequency	[MHz]		13,56
Operating conditions			
Ambient temperature	[°C]		-20...60
Storage temperature	[°C]		-20...60
Mechanical data			
Weight	[g]		370.5
Materials			POM
Tightening torque	[Nm]		0.5
Remarks			
Pack quantity			1 pcs.
Other data			

Tag E80371 (30 mm)

antenna	range without metal			
ANT515 / ANT516 + E80392	30 mm			

Tag E80384 (50 mm)

antenna	range without metal			
ANT515 / ANT516 + E80392	50 mm			

E80392



RFID antenna adapter to increase the travel speed

ANT-AMP/490x40/KQ

Tag E80320 (ISO card)

antenna	range without metal			
ANT515 / ANT516 + E80392	75 mm			