




Inductive NAMUR dual sensor for valve actuators

IND2004DN/20m

Article no longer available - archive entry

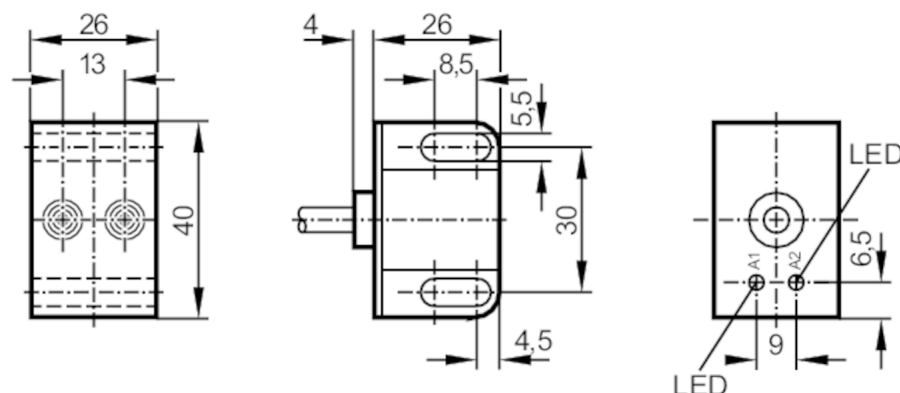

Product characteristics

Electrical design	NAMUR
Output function	2 x normally closed
Sensing range [mm]	4
Housing	rectangular
Dimensions [mm]	40 x 26 x 26

Electrical data

Connection to switching amplifiers	yes
Switching amplifiers	connection to switching amplifiers NV0100, NV0200 or other approved switching amplifiers with the max. values: U = 15 V / I = 50 mA / P = 180 mW
Nominal voltage DC [V]	8.2; (1kΩ)
Supply voltage DC [V]	7.5...15
Current consumption [mA]	< 1; (disabled; conductive: > 2,1)

Outputs

Electrical design	NAMUR
Output function	2 x normally closed
Max. cable resistance [Ω]	50
Switching frequency DC [Hz]	1800

Detection zone

Sensing range [mm]	4
--------------------	---

Operating conditions

Ambient temperature [°C]	-20...70
Protection	IP 67

Tests / approvals

Approval	PTB-Zulassungsnummer: Ex-96.D.2178X; Gerätekennzeichnung: EEx ia IIC T6
Shock/vibration resistance	30 g (11 ms) / 10-55 Hz (1 mm)


NN5012



Inductive NAMUR dual sensor for valve actuators

IND2004DN/20m

Safety classification		
Max. internal capacitance	[nF]	150
Max. internal inductance	[µH]	190
Mechanical data		
Housing		rectangular
Mounting		non-flush mountable
Dimensions	[mm]	40 x 26 x 26
Materials		PBT
Displays / operating elements		
Display	switching status	2 x LED, yellow
Remarks		
Pack quantity		1 pcs.
Electrical connection		
Cable: 20 m, silicone; 4 x 0.34 mm ²		
Connection		

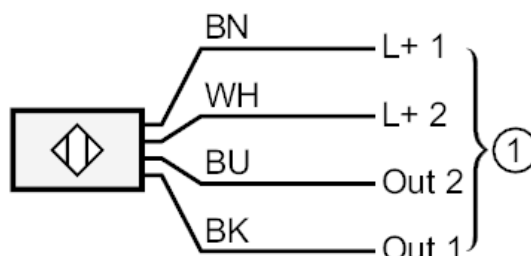

1 = connection to NAMUR amplifiers
Core colours :
BK = black
BN = brown
BU = blue
WH = white